


Solenoid valves

Subplates for NG6

Subplate for NG6 directional valves, one element, with relief valve, A & B side ports

Page: 1/1

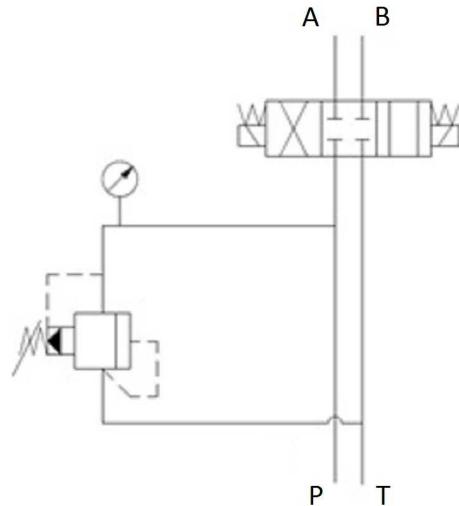

| Part nº | R1 | Nº directional valves | Flow (l/min) |
|-------------------|----------|-----------------------|--------------|
| PF1CL180 H | 3/8" BSP | 1 | 40 |

*** Review attached PDF***

Maximum flow: 40 l/min

Regulation rate: 20-250 bar

It includes pressure gauge intake female thread 1/4" BSP

Maximum pressure supported in the system 350 Bar