




Counterbalance, On B, Pilot from A





Pilot Operated Check, On B Pilot from A



Reducing, On B, Drained to A



Reducing/Relieving, On B tank to A

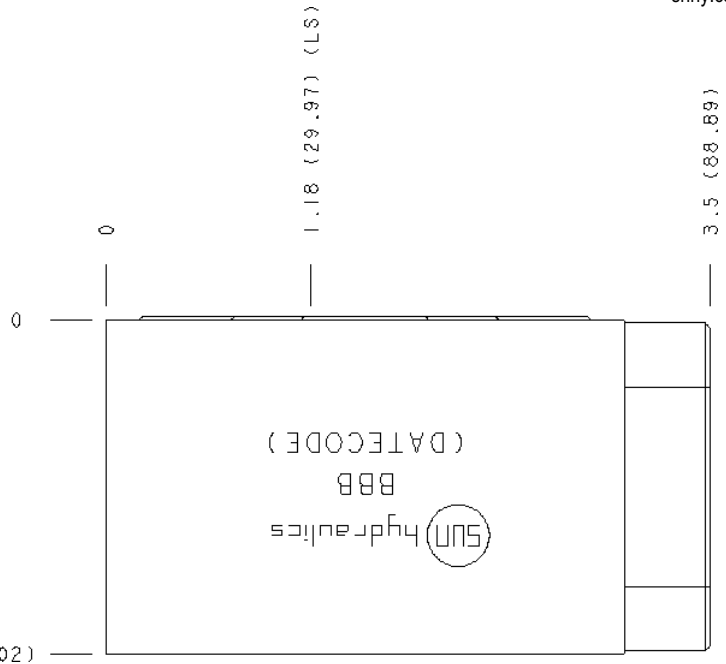

TECHNICAL DATA

Body Type	Sandwich
Interface	ISO 05
Body Features	On B, port 3 to A
Stack Height	49 mm
Open Cavities	1
Cavity	T-2A
Port Size	1/4" NPTF
Model Weight	0.57 kg.

NOTES

Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

PORT DESIGNATORS

Modifiers	Ports
BBB, /V	Gage Port (Plugged): 1/4" NPTF;
BBB/M, /Z	Gage Port (Plugged): 1/4" BSPP;

INCLUDED COMPONENTS

Part	Description	Quantity
340-003	Pipe Plug	1
500-001-014	O-Ring	5

CONFIGURATION OPTIONS

Model Code Example: BBB

MODIFIER


6061-T651 Aluminum, Buna-N
/M 6061-T651 Aluminum, Metric, Buna-N
/S 65-45-12 Ductile Iron, Buna-N, Blackened
/T 65-45-12 Ductile Iron, Metric, Buna-N, Blackened
/V 6061-T651 Aluminum, Viton
/W 65-45-12 Ductile Iron, Metric, Viton, Blackened
/Y 65-45-12 Ductile Iron, Viton, Blackened
/Z 6061-T651 Aluminum, Metric, Viton

MANIFOLD FACES


FACE GRID




5	6	7	8
9	10	11	12

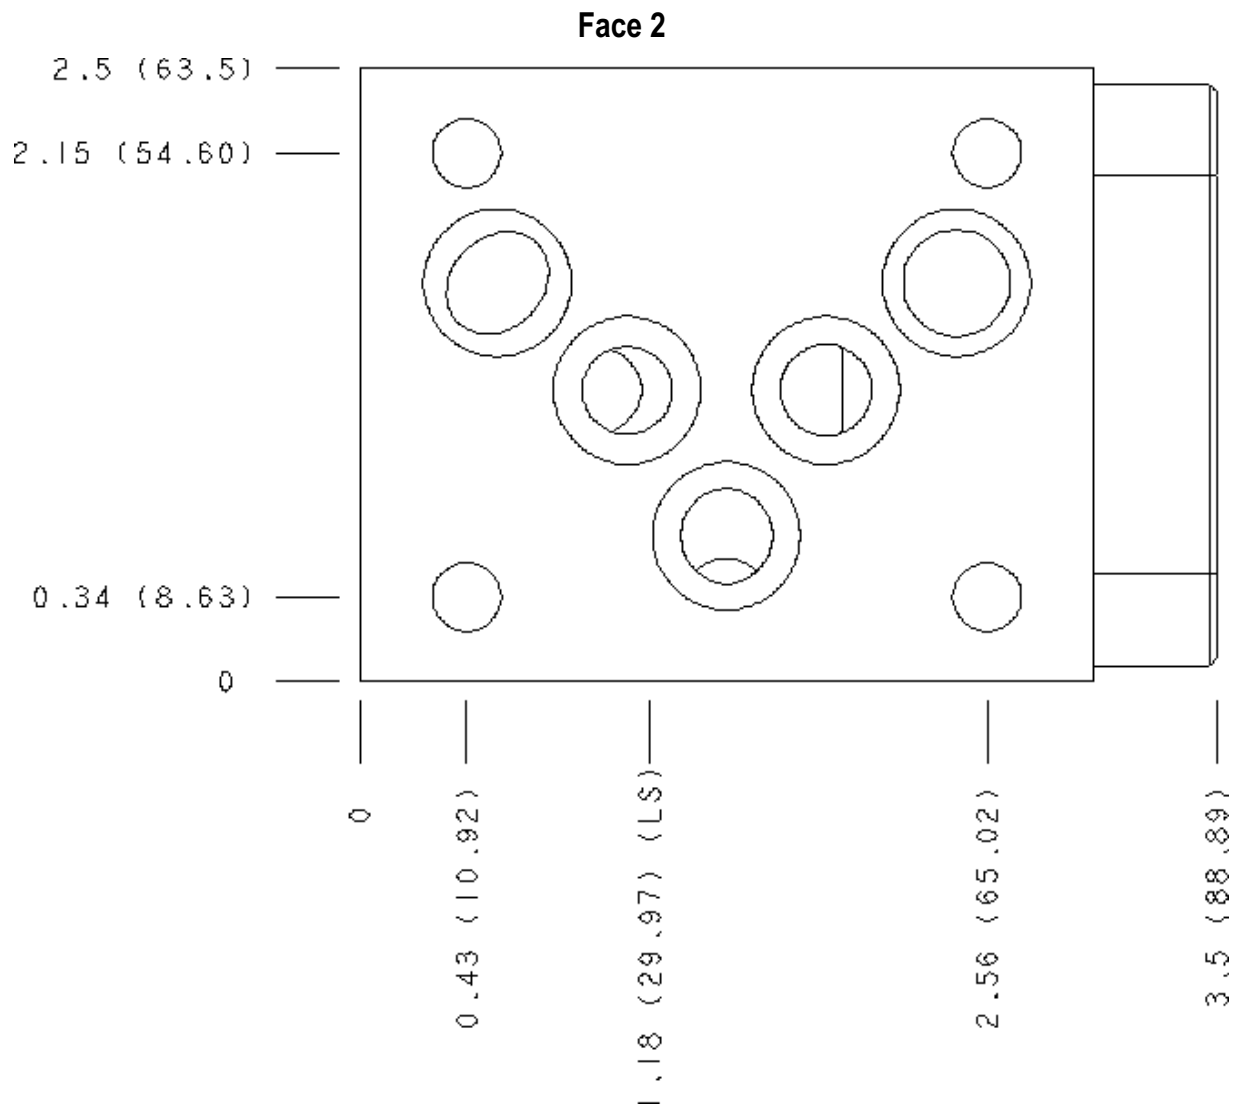


Face 5

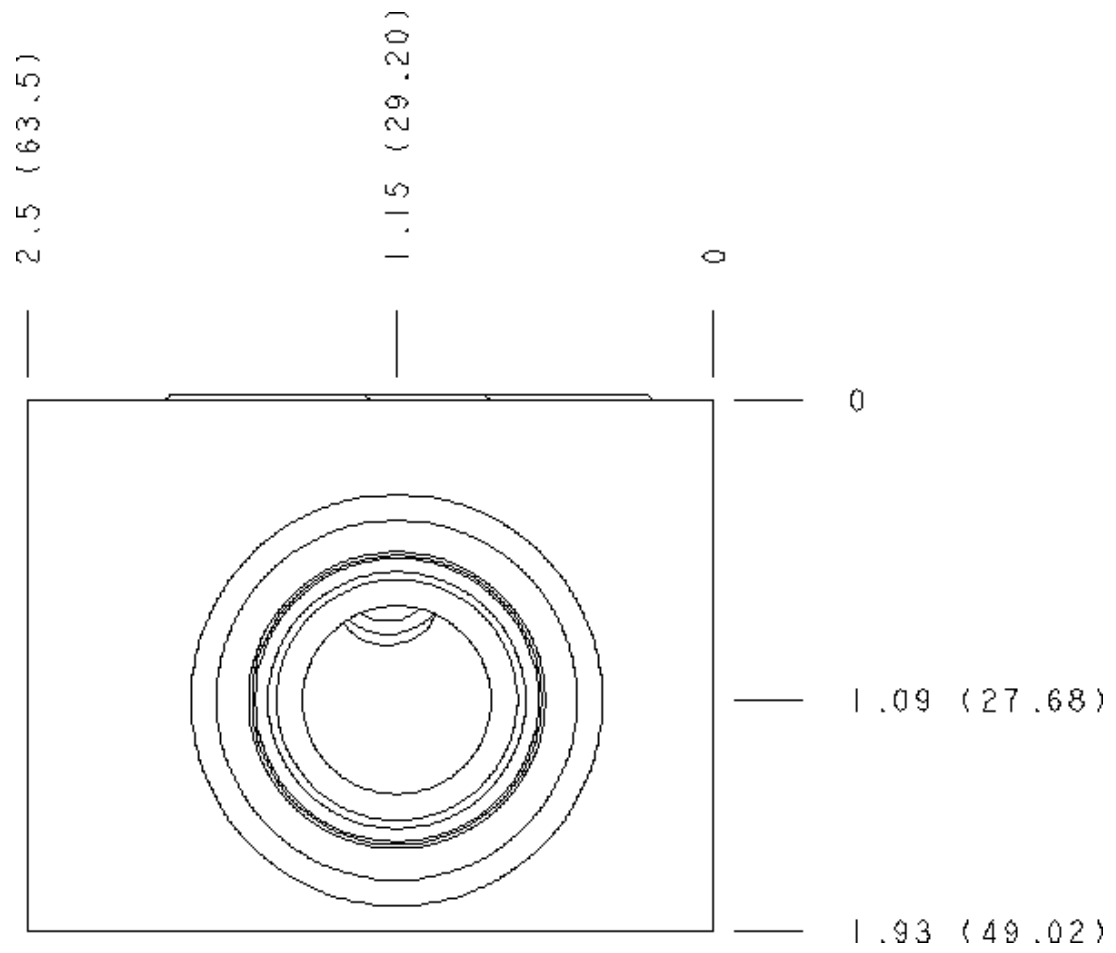

Face 6

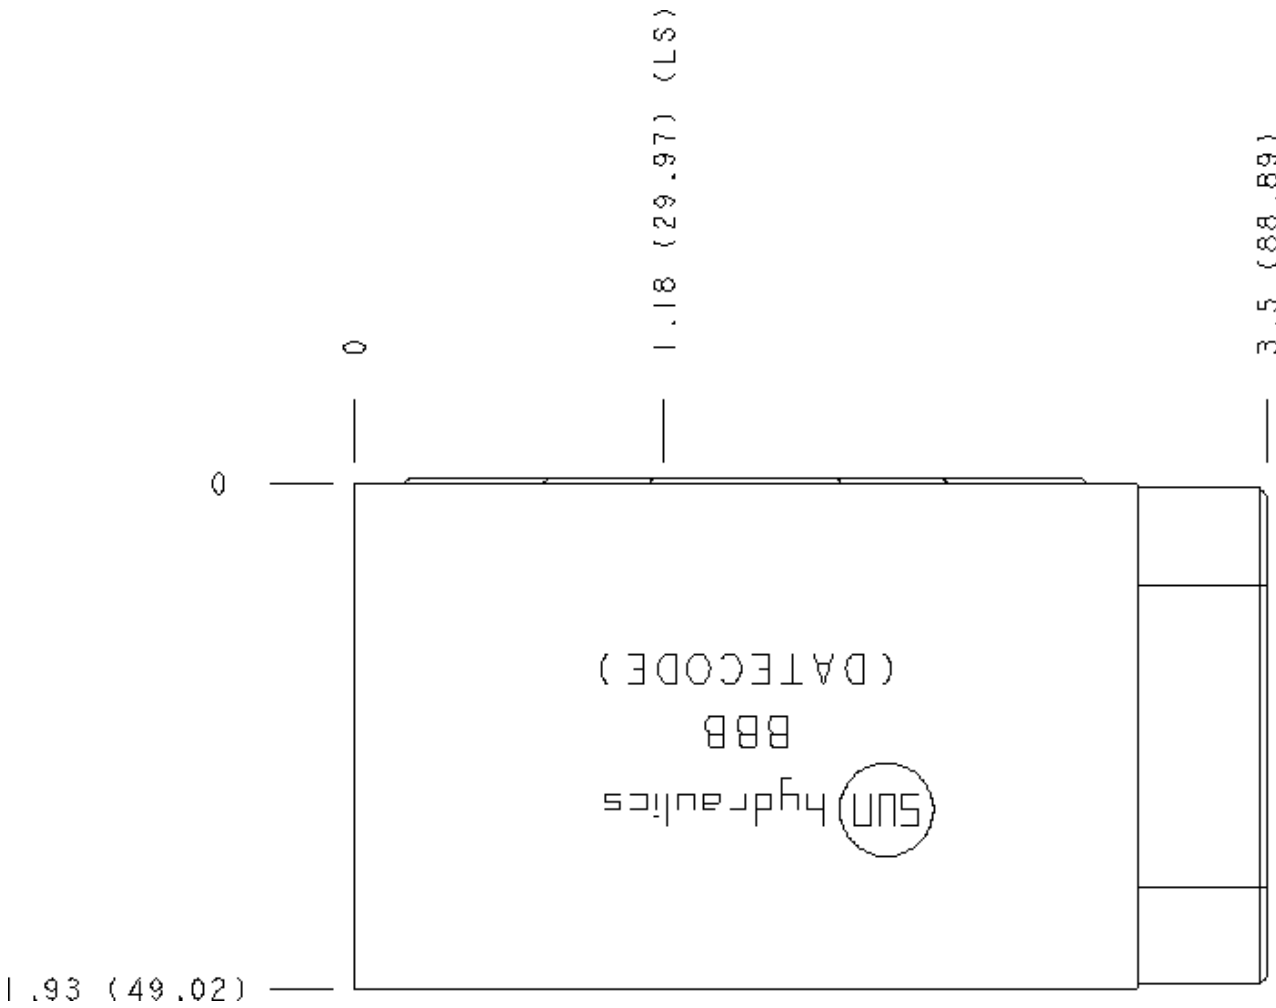

Face 7

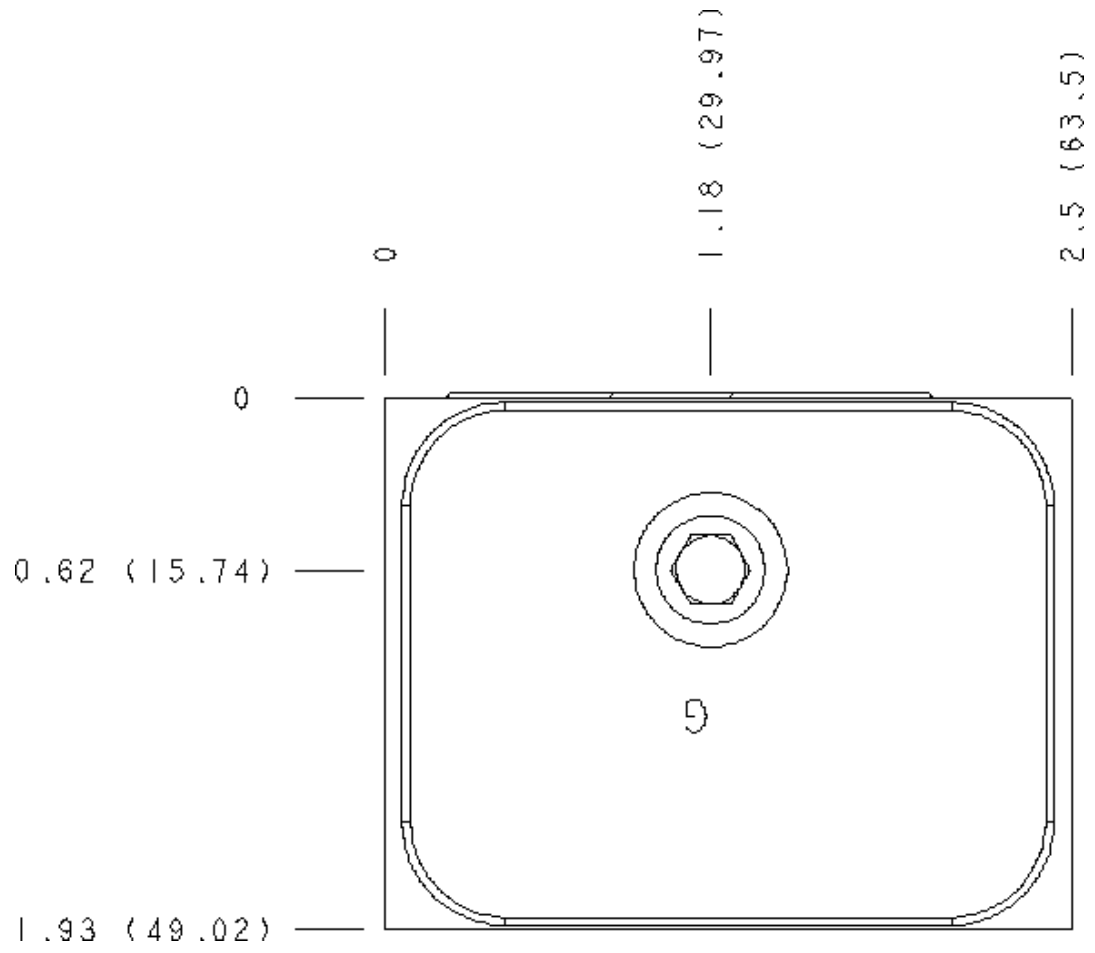

Face 10

