



SUPPORT WITH TAPERED SHAFT FOR PUMP GR.2

1

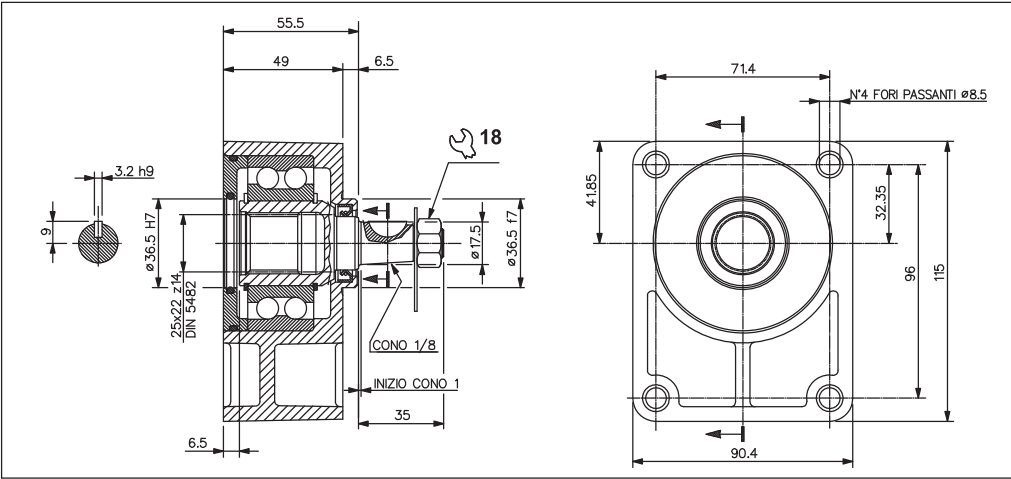

The SU/2-D (tapered shaft), is suitable for driving Gr. 2 hydraulic pumps and motors, with belts, chain or other transmission, in which heavy combined loads take place (axial and radial). The pump/motor Gr. 2, is directly flanged and connected by splined coupling (coupling to be ordered separately).


MAXIMUM LOAD ON THE SHAFT

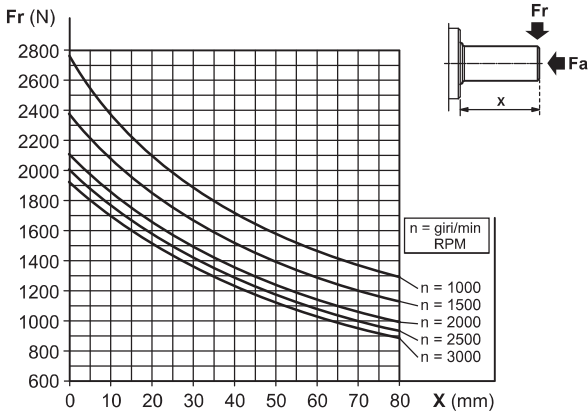

FEATURES

Minimum radial load (*)	Fr = 155 N
Radial load (*)	See graphic
Axial load (*)	Fa ≤ Fr • 0,8
Max. revolutions per minute	4000 RPM
Life (*)	3500 hours
Max. working temperature	70 °C
Grease quantity	16.5 ÷ 20.5 gr
Type of grease	DIN 51818 NLGI classe 2

(*) Nominal values calculated according to ISO 281. For more information, contact our technical department.

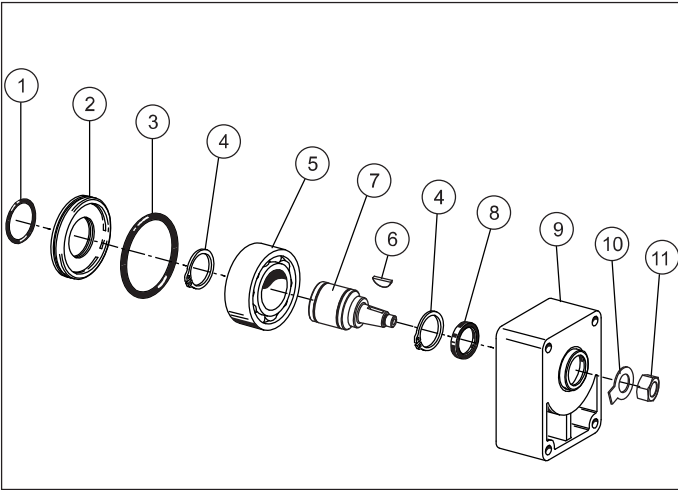

SPARE PARTS

Ref.	Code	Description	Q.ty
1	Q25830112	O-ring 36,14x2,62	1
2	39003700	Cover	1
3	Q25830133	O-ring 64,77x2,62	1
4	Q27150350	Snap ring D35	2
5	44005300	Bearing 3207 35x72x27	1
6	43203200	Woodruff 3,2x6,5	1
7	34221800	Tapered shaft	1
8	44101900	Shaft seal 22x32x6	1
9	39003500	Body	1
10	42101400	Washer	1
11	Q26514150	Nut M12x1,5	1

ORDERING CODE

