




Accessories 4-way evacuation valve and flow regulator chamber



The 4-way evacuation valve is used for extraction and discharge of waste oil fluid hydraulic gear and engine oil and antifreeze

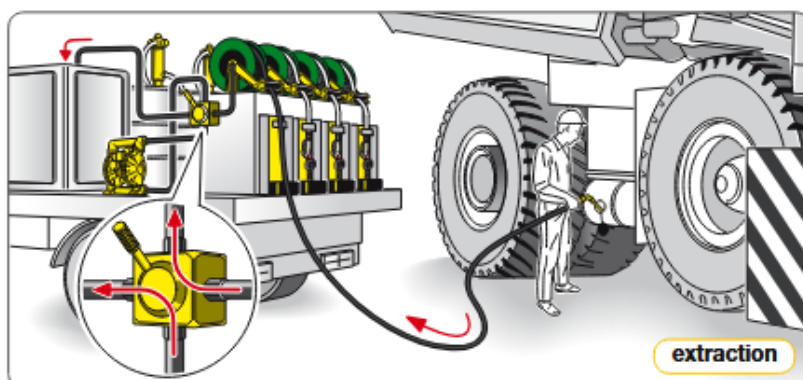


Art. 38130
4-way evacuation valve with connection F 3/4"G

Art. 38131
4-way evacuation valve with connection F 1"G

Art. 38132
4-way evacuation valve with connection F 1.1/2"G


Article	Seals	Connection	Pressure	Weight
38130	Viton	F 3/4"	14 bar	3 Kg
38131	Viton	F 1"	14 bar	3 Kg
38132	Viton	F 1.1/2"	14 bar	3 Kg

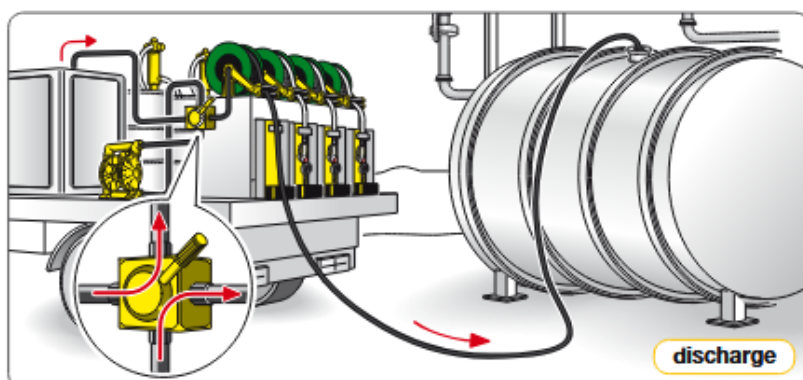


Art. 38097
Flow regulator chamber F 3/4" x F 3/4" equipped with:
- one-way valve eliminates sudden pressure changes, ensuring a regular flow
- suitable for R 1:1 - 3:1 - 5:1 pumps
- max pressure 100 bar

Art. 38098
Flow regulator chamber F 3/4" x F 3/4" with air tank equipped with:
- one-way valve eliminates sudden pressure changes, ensuring a regular flow
- suitable for pumps till R 20:1
- max pressure 100 bar

Pressure trend of oil pump outlet

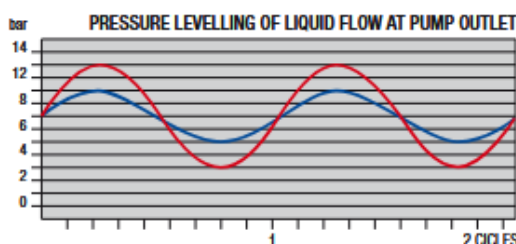

with pump R 3:1 - 8 bar
■ without chamber Art. 38097
■ with chamber Art. 38097

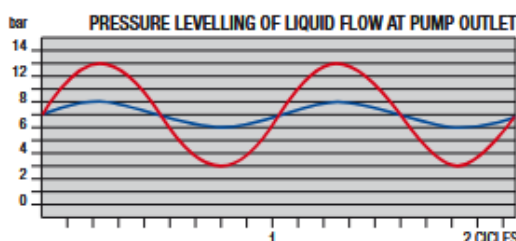

with pump R 3:1 - 8 bar
■ without chamber Art. 38098
■ with chamber Art. 38098

