


Handle with symbols for front end loader

Symbols for front end loader according to SS-EN 12525:2000 +A2:2010.


WKA22 with symbol, without push-buttons and
WKA23 with symbol, with two electrical push-buttons and a toggleswitch.

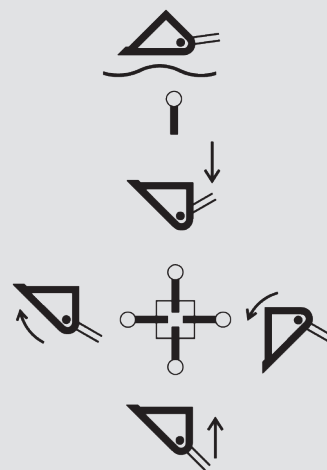

The knob is available with above symbol.


Cable WAL

Cable WALX, X = length * in mm

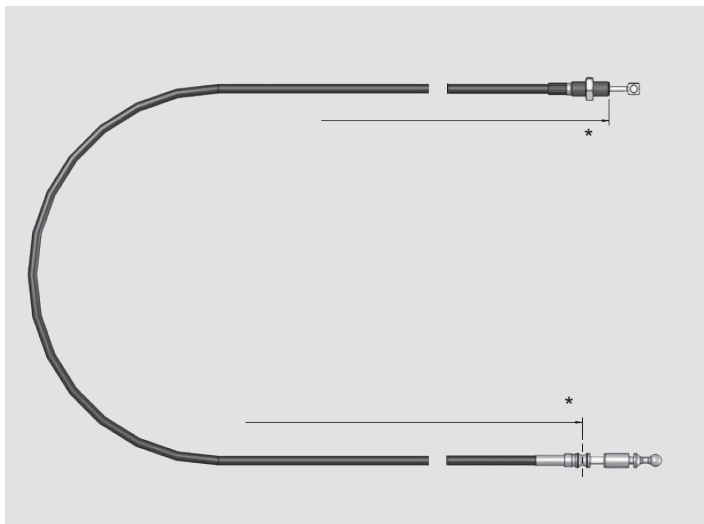

Max load in cable:	800 N
Max bending radius	150 mm
Outer diameter cable	9.5 mm

Standard cables	Length
WAL1200	1,200 mm
WAL1600	1,600 mm
WAL2000	2,000 mm
WAL2400	2,400 mm
WAL2800	2,800 mm

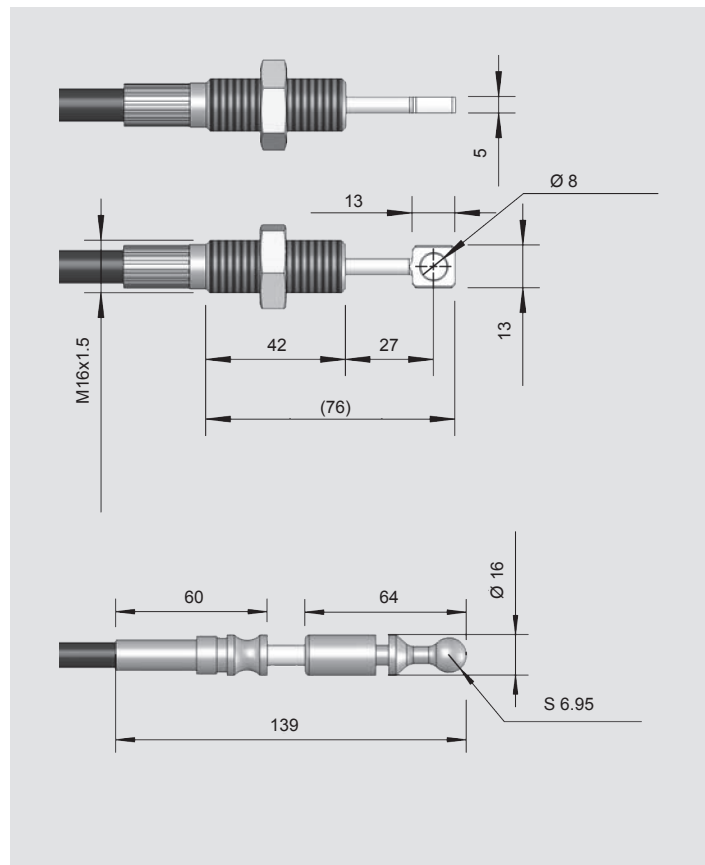

Make sure the cable has as few bends as possible when installed. Bending radius must not be less than 150 mm.