



Floating Joint

RoHS

The floating joint can absorb any “off-centering” or “loss of parallel accuracy” between the cylinder and the driven body.

- Centering is unnecessary.
- A high level of machining accuracy is unnecessary.
- The installation time is dramatically reduced.
- It is compact and is suitable for high tensile stresses.
- Long service life (with dustproof cover).
- Rotating angle: $\pm 5^\circ$

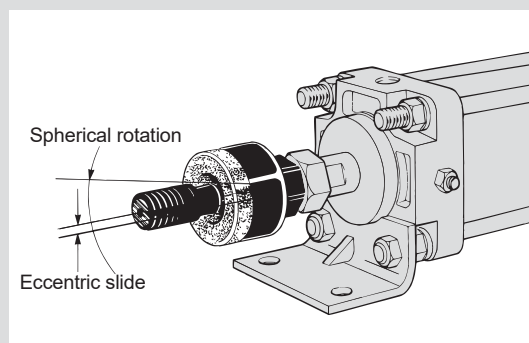

Series Variations

Series	Cylinder supply pressure		Applicable bore size [mm]	Mounting	Page
Standard JA Series 	Pneumatic cylinder	0.7 MPa or less	6, 10, 15	Basic type Flange type Foot type	1
		1 MPa or less	20, 25, 32, 40, 50, 63 80, 100, 125, 140, 160		
	Hydraulic cylinder	3.5 MPa or less	20, 25, 32, 40, 50, 63 80, 100, 125, 140, 160		
Heavy load JAH Series 	Hydraulic cylinder	7 MPa or less	40, 50, 63, 80, 100	Basic type Flange type Foot type	8
For compact cylinders JB Series 	Pneumatic cylinder	1 MPa or less	12, 16, 20, 25, 32 40, 50, 63, 80, 100	Basic type (Female thread)	11
Stainless steel type JS Series 	Pneumatic cylinder	1 MPa or less	10, 16, 20, 25 32, 40, 50, 63	Basic type	13
	Hydraulic cylinder	3.5 MPa or less	20, 25, 32 40, 50, 63		

JA/JAH/JB/JS Series



EMC-JA-JAH-JB-JS-01A-UK


Floating Joint: Standard Type

JA Series

RoHS

Specifications

Operating pressure	Pneumatic cylinder: 1 MPa or less
	Hydraulic cylinder: 3.5 MPa or less
Mounting	Basic type, Flange type, Foot type

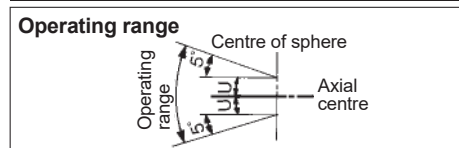

JA series

⚠ Precautions

Be sure to read this before handling the products. Refer to back for Safety Instructions.

Mounting

⚠ Warning

- To screw the male threads of the rod into the female threads of the socket or the case, make sure that it does not bottom out. If the floating joint is used with its rod bottom out, the stud will not be able to float, causing damage. For the screw-in depth of the female threads, refer to the dimensions (page 3). As a rule, after the rod bottoms out, back off 1 to 2 turns.
- The dust cover may adhere to the stud. In this case, move the dust cover at the neck of the stud by the finger or twist the stud slightly left or right to break in the dust cover before use. Additionally, when screwing the stud and socket or the case into a driven body, screw in such parts with the dust cover removed. When screwing in such parts without removing the dust cover, this may cause damage to the dust cover.
- To use a floating joint to connect the cylinder rod to a driven body, secure it in place by applying a torque that is appropriate for the thread size. Also, if there is a risk of loosening during operation, take measures to prevent loosening, such as using a locking pin or thread adhesive. In the event that the connected portion becomes loose, the driven body might lose control or fall off, leading to equipment damage or injury to personnel.
- This product is not a rotary joint. So, the product cannot be used for rotational or rotation acting applications.
- Be sure to use the cushion mechanism of the cylinder or the buffer mechanism, such as the shock absorber so that any impact force is not applied to the floating joint when stopping a driven body. If there is no buffer mechanism, an excessive impact force is generated. As a result, the tensile compression force of the floating joint may exceed its maximum level.

Maintenance

⚠ Warning

- Do not reuse if disassembled. High strength adhesive is applied to the portion of the connection that is threaded to prevent it from loosening, and it must not be disassembled. If it is forcefully disassembled, it could lead to damage.

Model/Specifications

Model	Applicable bore size [mm]	Applicable cylinder nominal thread size	Maximum operating tension and compression force (N)			Allowable eccentricity U [mm]	Rotating angle	Ambient temperature		
			Basic type	Flange type	Foot type					
Standard/Thread nominal size										
JA6-3-050	6	M3 x 0.5	19	—	—	0.5	±5°	-5 to 60 °C		
JA10-4-070	10	M4 x 0.7	54	—	—	0.5				
JA15-5-080	10, 15	M5 x 0.8	123	—	—	0.5				
JA15-6-100	15	M6 x 1	123	—	—	0.5				
JA□20-8-125	20	M8 x 1.25	1100	1100	1000	0.5				
JA□30-10-125	25, 32	M10 x 1.25	2500	2500	2000	0.5				
JA□40-14-150	40	M14 x 1.5	4400	4400	4400	0.75				
JA□63-18-150	50, 63	M18 x 1.5	11000	11000	9000	1				
JA□80-22-150	80	M22 x 1.5	18000	18000	14000	1.25				
JA□100-26-150	100	M26 x 1.5	28000	28000	22000	2				
JA□140-30-150	125, 140	M30 x 1.5	54000	36000	36000	2.5	±5°			
JA□160-36-150	160	M36 x 1.5	71000	55000	55000	3				
Semi-standard/Thread nominal size										
JA□20-8-100	20	M8 x 1	1100	1100	1000	0.5			±5°	
JA□25-10-150	25	M10 x 1.5	2500	2500	2000	0.5				
JA□32-10-100	32	M10 x 1	2500	2500	2000	0.5				
JA□40-12-125	32, 40	M12 x 1.25	4400	4400	4400	0.75				
JA□40-12-150	40	M12 x 1.5	4400	4400	4400	0.75				
JA□40-12-175	32, 40	M12 x 1.75	4400	4400	4400	0.75				
JA□50-16-150	50	M16 x 1.5	11000	11000	9000	1				
JA□63-16-200	50, 63	M16 x 2	11000	11000	9000	1				
JA□80-20-250	80	M20 x 2.5	18000	18000	14000	1.25				
JA□100-24-300	100	M24 x 3	28000	28000	22000	2				
JA□100-27-150	100	M27 x 1.5	28000	28000	22000	2				
JA□125-27-200	125	M27 x 2	28000	28000	28000	2				
JA□160-33-200	160	M33 x 2	71000	55000	55000	3				

How to Order

JA

F

40

-

14-150

-

Mounting type

—	Basic type
F	Flange type
L	Foot type

Applicable bore size [mm]

Standard	Model	Symbol	Applicable bore size [mm]
		6	6
		10	10
		15	10, 15
		20	20
		30	25, 32
		40	40
		63	50, 63
		80	80
		100	100
	140	125, 140	
	160	160	

180	180
200	200

Option

—	None
X11	High temperature specifications -5 to 100 °C

Thread nominal size (Standard)


Nominal thread size	Applicable cylinder nominal thread size
3-050	M3 x 0.5
4-070	M4 x 0.7
5-080	M5 x 0.8
6-100	M6 x 1
8-125	M8 x 1.25
10-125	M10 x 1.25
14-150	M14 x 1.5
18-150	M18 x 1.5
22-150	M22 x 1.5
26-150	M26 x 1.5
30-150	M30 x 1.5
36-150	M36 x 1.5

Caution


The black zinc chromate treatment is applied to

Construction

Ø 6 to Ø 15

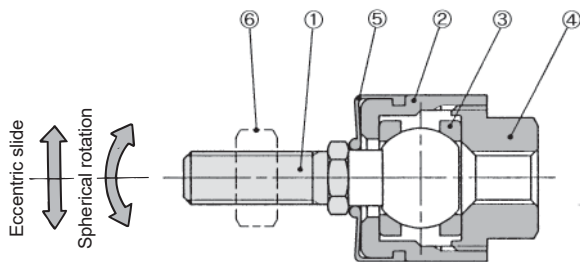

Ø 20 to Ø 160

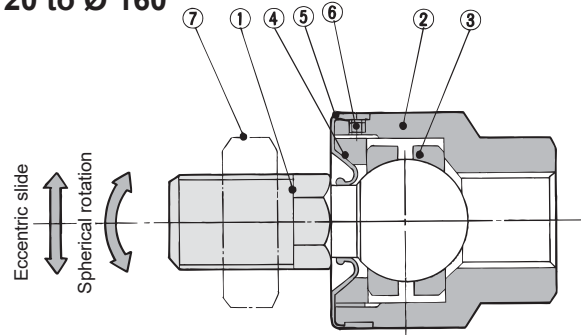

Component Parts


No.	Description	Material	Note
1	Stud	Free-cutting steel	Electroless nickel plated
2	Case	Brass	Electroless nickel plated
3	Ring	Stainless steel	
4	Socket	Brass	Electroless nickel plated
5	Dust cover	Synthetic rubber	
6	Rod end nut	Low carbon steel wire rod	Zinc chromated

No.	Description	Material	Note
1	Stud	Chromium molybdenum steel	Dyed black
2	Case	Carbon steel	Black zinc chromated
3	Ring	Chromium molybdenum steel	
4	Cap	Carbon steel	Black zinc chromated
5	Dust cover	Synthetic rubber	
6	Set screw	Carbon steel	Zinc chromated
7	Rod end nut	Carbon steel	Zinc chromated
8	Flange	Rolled steel	Black zinc chromated
9	Foot	Rolled steel	Black zinc chromated

Accessory Dimensions

Rod end nut

One rod end nut is supplied with the JA series or JAH basic type. If additional nuts are needed, please order them using the part no. shown below.

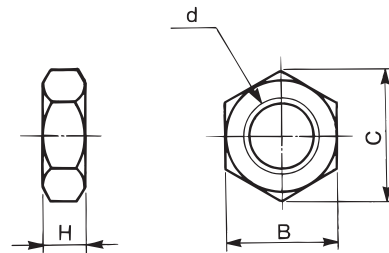

Model	Order no.	d: Thread nominal size	H	B	C
JA6-3-050	DA00201	M3×0.5	2.4	5.5	6.4
JA10-4-070	DA00117	M4×0.7	3.2	7	8.1
JA15-5-080	DA00118	M5×0.8	4	8	9.2
JA15-6-100	DA00119	M6×1	5	10	11.5
JA20-8-100	DA00207	M8×1	5	13	15
JA20-8-125	DA00169	M8×1.25	5	13	15
JA32-10-100	DA00141	M10×1	6	17	19.6
JA30-10-125	DA00142	M10×1.25	6	17	19.6
JA25-10-150	DA00140	M10×1.5	6	17	19.6
JA40-12-125	DA00145	M12×1.25	7	19	21.9
JA40-12-150	DA00146	M12×1.5	7	19	21.9
JA40-12-175	DA00143	M12×1.75	7	19	21.9
JA40-14-150	DA00148	M14×1.5	8	22	25.4
JA50-16-150	DA00151	M16×1.5	10	24	27.7
JAH40-16-150					
JA63-16-200	DA00150	M16×2	10	24	27.7
JA63-18-150	DA00153	M18×1.5	11	27	31.2

Model	Order no.	d: Thread nominal size	H	B	C
JAH50-20-150	DA00155	M20×1.5	12	30	34.6
JA80-20-250	DA00154	M20×2.5	12	30	34.6
JA80-22-150	DA00156	M22×1.5	13	32	37
JAH63-24-150	DA00158	M24×1.5	14	36	41.6
JAH63-24-200	DA00159	M24×2	14	36	41.6
JA100-24-300	DA00157	M24×3	14	36	41.6
JA100-26-150	DA00160	M26×1.5	16	41	47.3
JA100-27-150	DA00161	M27×1.5	16	41	47.3
JA125-27-200	DA00162	M27×2	16	41	47.3
JA140-30-150	DA00224	M30×1.5	18	46	53.1
JAH80-30-150					
JAH80-30-200	DA00163	M30×2	18	46	53.1
JA160-33-200	DA00225	M33×2	20	50	57.7
JA160-36-150	DA00164	M36×1.5	21	55	63.5
JAH100-39-150	DA00204	M39×1.5	23	60	69.3
JAH100-42-300	DA00165	M42×3	25	65	75
JAH100-48-150	DA00205	M48×1.5	29	75	86.5

Floating Joint Replacement Parts

Dust cover

Order with the following part no. if dust cover is damaged.
Replaceable dust cover is only for the basic type. Flange type and foot type cannot be replaced.


Part no. for dust cover	Applicable model
P2152051	JA6, JA10
P2152052	JA15, JB12, JB16
P215215	JA20, JB20
P215225	JA30, JB30
P215235	JA40, JB40
P215245	JA63, JA50, JB63

Part no. for dust cover	Applicable model
P215255	JA80, JAH40, JB80
P215265	JA100, JAH50, JB100
P215275	JA125, JAH63
P215285	JA140, JAH80, JB140
P215295	JA160, JAH100, JB160

JA Series

Basic Type: JA6 to JA160



JA6 to 15

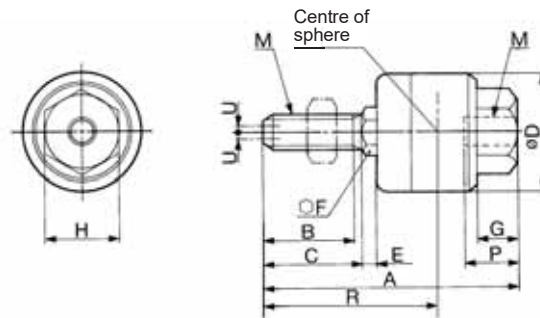

Use the precision spanner for clock 4 mm in the case of mounting male thread of JA6 and JA10.

JA20 to 160

Without C-dimension

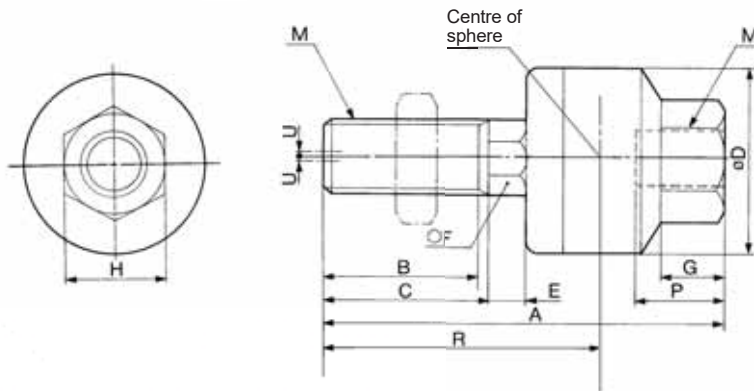


																	[mm]
Applicable bore size [mm]	Model	M		A	B	C	D	E	F	G	H	Centre of sphere R	Maximum thread depth P	Allowable eccentricity U	Maximum operating tension and compression force [N]	Weight [kg]	
		Nominal size	Pitch														
Standard Pneumatic: Up to 1 MPa Hydraulic: Up to 3.5 MPa																	
6	JA6-3-050	3	0.5	23.2	7	8	12	1.5	4	3.2	5.5	15	5	0.5	19	0.01	
10 (CJ1)	JA10-4-070	4	0.7	26	9	10	12	1.5	4	4	7	17	5.5	0.5	54	0.01	
10 (CZ1), 15 (CJ1)	JA15-5-080	5	0.8	34.5	12.5	14	16	2	6	5	10	23	7	0.5	123	0.02	
15 (CZ1)	JA15-6-100	6	1	34.5	12.5	14	16	2	6	5	10	23	7	0.5	123	0.02	
20	JA20-8-125	8	1.25	44	17.5	—	21	4.5	7	7	13	30.5	8	0.5	1100	0.05	
25, 32	JA30-10-125	10	1.25	49.5	19.5	—	24	5	8	8	17	34	9	0.5	2500	0.07	
40	JA40-14-150	14	1.5	60	20	—	31	6	11	11	22	38	13	0.75	4400	0.16	
50, 63	JA63-18-150	18	1.5	74.5	25	—	41	7.5	14	13.5	27	47.5	15	1	11000	0.31	
80	JA80-22-150	22	1.5	89.5	29	—	50	9.5	19	16	32	56.5	18	1.25	18000	0.58	
100	JA100-26-150	26	1.5	110	35	—	59.5	11.5	24	20	41	68	24	2	28000	1.08	
125, 140	JA140-30-150	30	1.5	152	42	45	79	14	30	22	46	94.5	38	2.5	54000	2.7	
160	JA160-36-150	36	1.5	178	52	55	96	16	36	24	55	112	42	3	71000	4.7	

Semi-standard Pneumatic: Up to 1 MPa Hydraulic: Up to 3.5 MPa


20	JA20-8-100	8	1	44	17.5	—	21	4.5	7	7	13	30.5	8	0.5	1100	0.05
25	JA25-10-150	10	1.5	49.5	19.5	—	24	5	8	8	17	34	9	0.5	2500	0.07
32	JA32-10-100	10	1	49.5	19.5	—	24	5	8	8	17	34	9	0.5	2500	0.07
32, 40	JA40-12-125	12	1.25	60	20	—	31	6	11	11	22	38	13	0.75	4400	0.16
40	JA40-12-150	12	1.5	60	20	—	31	6	11	11	22	38	13	0.75	4400	0.16
32, 40	JA40-12-175	12	1.75	60	20	—	31	6	11	11	22	38	13	0.75	4400	0.16
50	JA50-16-150	16	1.5	71.5	22	—	41	7.5	14	13.5	27	44.5	15	1	11000	0.3
50, 63	JA63-16-200	16	2	71.5	22	—	41	7.5	14	13.5	27	44.5	15	1	11000	0.3
80	JA80-20-250	20	2.5	90.5	27	30	50	9.5	19	16	32	57.5	18	1.25	18000	0.6
100	JA100-24-300	24	3	110	32	35	59.5	11.5	24	20	41	68	24	2	28000	1.05
100	JA100-27-150	27	1.5	110	35	—	59.5	11.5	24	20	41	68	24	2	28000	1.08
125	JA125-27-200	27	2	123	34	38	66	13	24	20	41	77	24	2	28000	1.5
160	JA160-33-200	33	2	165	38	42	96	16	36	24	55	99	42	3	71000	4.5

Flange Type: JAF20 to JAF160

JAF20 to Ø 40

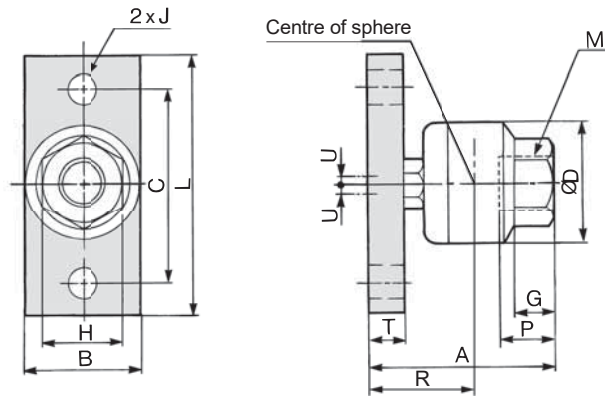

Ø JAF50 to Ø 160

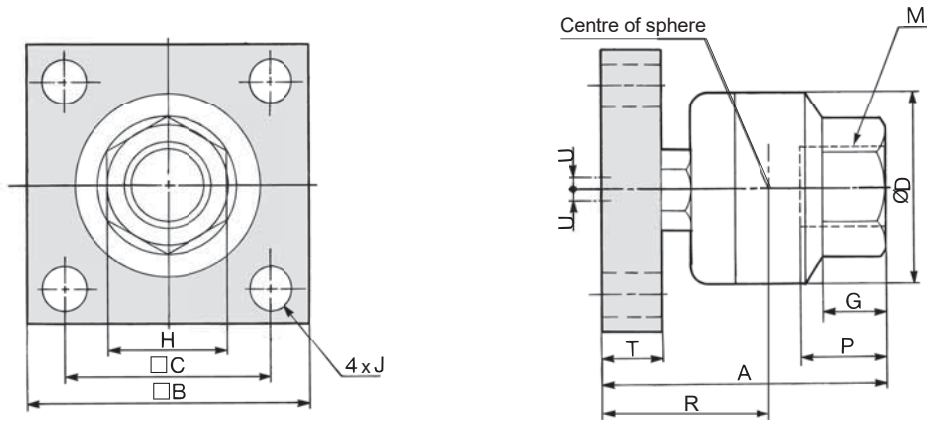

Applicable bore size [mm]	Model	M		A	B	L	C	D	T	J	G	H	Centre of sphere R	Maximum thread depth P	Allowable eccentricity U	Maximum operating tension and compression force (N)	Weight [kg]
		Nominal size	Pitch														

Standard Pneumatic: Up to 1 MPa Hydraulic: Up to 3.5 MPa

20	JAF20-8-125	8	1.25	32.5	19	48	36	21	6	6.6	7	13	19	8	0.5	1100	0.08
25, 32	JAF30-10-125	10	1.25	36	25	52	40	24	6	6.6	8	17	20.5	9	0.5	2500	0.12
40	JAF40-14-150	14	1.5	49	32	70	52	31	9	9	11	22	27	13	0.75	4400	0.28
50, 63	JAF63-18-150	18	1.5	61.5	65	—	45	41	12	9	13.5	27	34.5	15	1	11000	0.63
80	JAF80-22-150	22	1.5	76.5	75	—	55	50	16	11	16	32	43.5	18	1.25	18000	1.15
100	JAF100-26-150	26	1.5	94	90	—	65	59.5	19	11	20	41	52	24	2	28000	2.07
125, 140	JAF140-30-150	30	1.5	131	125	—	82	79	24	18	22	46	73.5	38	2.5	36000	5.2
160	JAF160-36-150	36	1.5	152	150	—	100	96	29	22	24	55	86	42	3	55000	9


Semi-standard Pneumatic: Up to 1 MPa Hydraulic: Up to 3.5 MPa

20	JAF20-8-100	8	1	32.5	19	48	36	21	6	6.6	7	13	19	8	0.5	1100	0.08
25	JAF25-10-150	10	1.5	36	25	52	40	24	6	6.6	8	17	20.5	9	0.5	2500	0.12
32	JAF32-10-100	10	1	36	25	52	40	24	6	6.6	8	17	20.5	9	0.5	2500	0.12
32, 40	JAF40-12-125	12	1.25	49	32	70	52	31	9	9	11	22	27	13	0.75	4400	0.28
40	JAF40-12-150	12	1.5	49	32	70	52	31	9	9	11	22	27	13	0.75	4400	0.28
32, 40	JAF40-12-175	12	1.75	49	32	70	52	31	9	9	11	22	27	13	0.75	4400	0.28
50	JAF50-16-150	16	1.5	61.5	65	—	45	41	12	9	13.5	27	34.5	15	1	11000	0.63
50, 63	JAF63-16-200	16	2	61.5	65	—	45	41	12	9	13.5	27	34.5	15	1	11000	0.63
80	JAF80-20-250	20	2.5	76.5	75	—	55	50	16	11	16	32	43.5	18	1.25	18000	1.15
100	JAF100-24-300	24	3	94	90	—	65	59.5	19	11	20	41	52	24	2	28000	2.07
100	JAF100-27-150	27	1.5	94	90	—	65	59.5	19	11	20	41	52	24	2	28000	2.07
125	JAF125-27-200	27	2	106	100	—	72	66	21	18	20	41	60	24	2	28000	2.8
160	JAF160-33-200	33	2	152	150	—	100	96	29	22	24	55	86	42	3	55000	9


JA Series

Foot Type: JAL20 to JAF160

JAL20 to 100

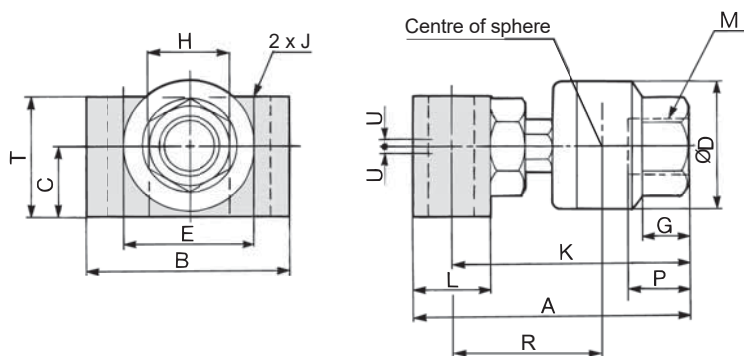

JAL125 to 160

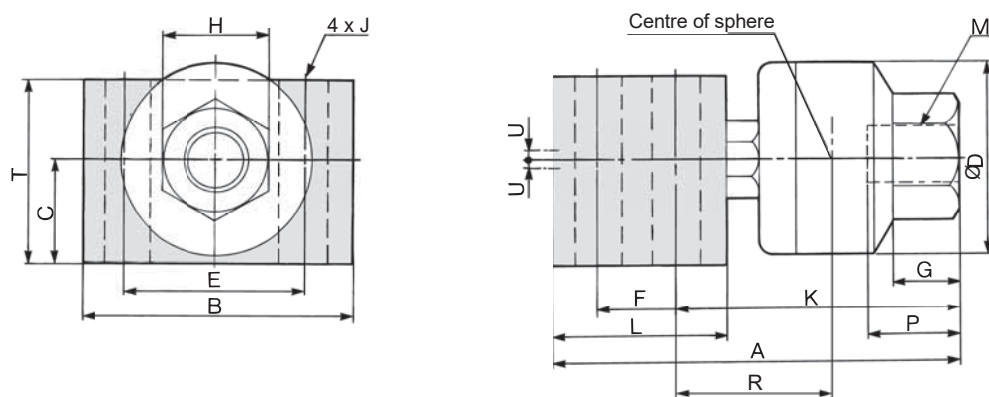

Applicable bore size [mm]	Model	M		A	B	C	D	E	F	K	L	T	J	G	H	Centre of sphere R	Maximum thread depth P	Allowable eccentricity U	Maximum operating tension and compression force [N]	Weight [kg]
		Nominal size	Pitch																	
20	JAL20-8-125	8	1.25	44	30	11.5	21	18	—	38	12	19	6.6	7	13	24.5	8	0.5	1000	0.09
25, 32	JAL30-10-125	10	1.25	52	42	14	24	24	—	44	16	25	9	8	17	28.5	9	0.5	2000	0.18
40	JAL40-14-150	14	1.5	67	52	17.5	31	30	—	57.5	19	30	11	11	22	35.5	13	0.75	4400	0.36
50, 63	JAL63-18-150	18	1.5	82.5	56	23	41	34	—	71.5	22	38	11	13.5	27	44.5	15	1	9000	0.61
80	JAL80-22-150	22	1.5	98.5	70	28	50	42	—	86	25	47	14	16	32	53	18	1.25	14000	1.09
100	JAL100-26-150	26	1.5	123	80	35	59.5	48	—	107	32	58	16	20	41	65	24	2	22000	2.03
125, 140	JAL140-30-150	30	1.5	187	96	45	79	60	44	125	80	79	18	22	46	67.5	38	2.5	36000	6.4
160	JAL160-36-150	36	1.5	213	116	55	96	74	48	144	90	89	22	24	55	78	42	3	55000	10

Semi-standard Pneumatic: Up to 1 MPa Hydraulic: Up to 3.5 MPa

20	JAL20-8-100	8	1	44	30	11.5	21	18	—	38	12	19	6.6	7	13	24.5	8	0.5	1000	0.09
25	JAL25-10-150	10	1.5	52	42	14	24	24	—	44	16	25	9	8	17	28.5	9	0.5	2000	0.18
32	JAL32-10-100	10	1	52	42	14	24	24	—	44	16	25	9	8	17	28.5	9	0.5	2000	0.18
32, 40	JAL40-12-125	12	1.25	67	52	17.5	31	30	—	57.5	19	30	11	11	22	35.5	13	0.75	4400	0.36
40	JAL40-12-150	12	1.5	67	52	17.5	31	30	—	57.5	19	30	11	11	22	35.5	13	0.75	4400	0.36
32, 40	JAL40-12-175	12	1.75	67	52	17.5	31	30	—	57.5	19	30	11	11	22	35.5	13	0.75	4400	0.36
50	JAL50-16-150	16	1.5	82.5	56	23	41	34	—	71.5	22	38	11	13.5	27	44.5	15	1	9000	0.61
50, 63	JAL63-16-200	16	2	82.5	56	23	41	34	—	71.5	22	38	11	13.5	27	44.5	15	1	9000	0.61
80	JAL80-20-250	20	2.5	98.5	70	28	50	42	—	86	25	47	14	16	32	53	18	1.25	14000	1.09
100	JAL100-24-300	24	3	123	80	35	59.5	48	—	107	32	58	16	20	41	65	24	2	22000	2.03
100	JAL100-27-150	27	1.5	123	80	35	59.5	48	—	107	32	58	16	20	41	65	24	2	22000	2.03
125	JAL125-27-200	27	2	155	88	38	66	54	36	102	70	69	14	20	41	56	24	2	28000	4.1
160	JAL160-33-200	33	2	213	116	55	96	74	48	144	90	89	22	24	55	78	42	3	55000	10

1 For Pneumatic Cylinders (Ø 180, Ø 200)

Symbol

-X530

JA series standard type floating joint which is used for pneumatic cylinders (Ø 180, Ø 200)

* This product is dedicated to the pneumatic cylinders.




Model/Specifications

Applicable bore size [mm]	Model	Applicable cylinder nominal thread size	Maximum operating tensile and compressive force (N)			Allowable eccentricity (U)	Rotating angle	Ambient temperature
			Basic type	Flange type	Foot type			
180	JA□180-40-150-X530	M40 x 1.5	71000	55000	55000	3	5°	-5 to 60 °C
200	JA□200-45-150-X530	M45 x 1.5						

Specifications

Operating pressure	Pneumatic cylinder: 1 MPa or less
Mounting	Basic type, Flange type, Foot type

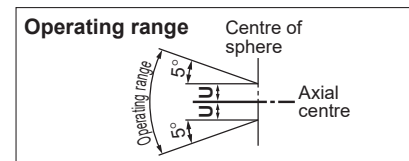

How to Order

JA F 180 - 40-150 - X530

Mounting type

—	Basic type
F	Flange type
L	Foot type

For pneumatic cylinders (Ø 180, Ø 200)

Applicable bore size



Symbol	Applicable bore size
180	180 mm
200	200 mm

Nominal thread size

Nominal thread size	Applicable cylinder nominal thread size
40-150	M40 x 1.5
45-150	M45 x 1.5

Basic Type: JA

JA ¹⁸⁰/₂₀₀ -□-X530

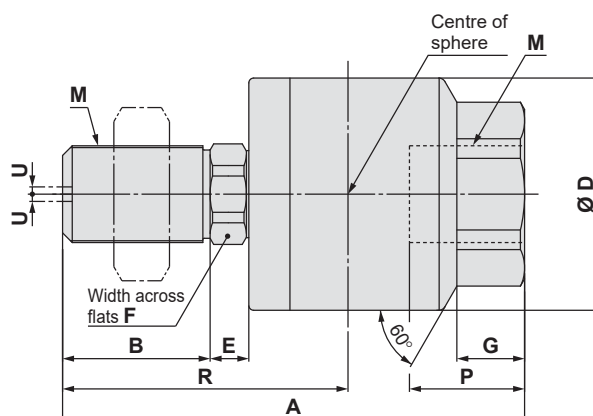


Dimensions

Applicable bore size	Model	M		A	B	D	E	F	G	H	Centre of sphere R	Maximum screw-in depth P	Allowable eccentricity U	Maximum operating tensile and compressive force [N]	Weight [kg]
		Nominal size	Pitch												
180	JA180-40-150-X530	40	1.5	191	61	96	16	36	28	70	118	49	3	71000	5.3
200	JA200-45-150-X530	45	1.5	191	61	96	16	36	28	70	118	49	3	71000	5.4

JA Series

Flange Type: JAF

JAF ¹⁸⁰₂₀₀ -□-X530

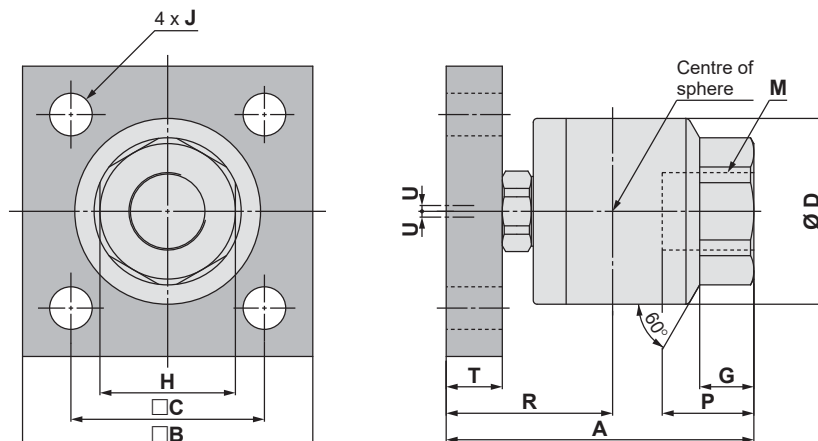


Dimensions

Applicable bore size	Model	M		A	B	C	D	T	J	G	H	Centre of sphere R	Maximum screw-in depth P	Allowable eccentricity U	Maximum operating tensile and compressive force (N)	Weight (kg)
		Nominal size	Pitch													
180	JAF180-40-150-X530	40	1.5	159	150	100	96	29	22	28	70	86	49	3	55000	9.1
200	JAF200-45-150-X530	45	1.5	159	150	100	96	29	22	28	70	86	49	3	55000	9.2

Foot Type: JAL

JAL ¹⁸⁰₂₀₀ -□-X530

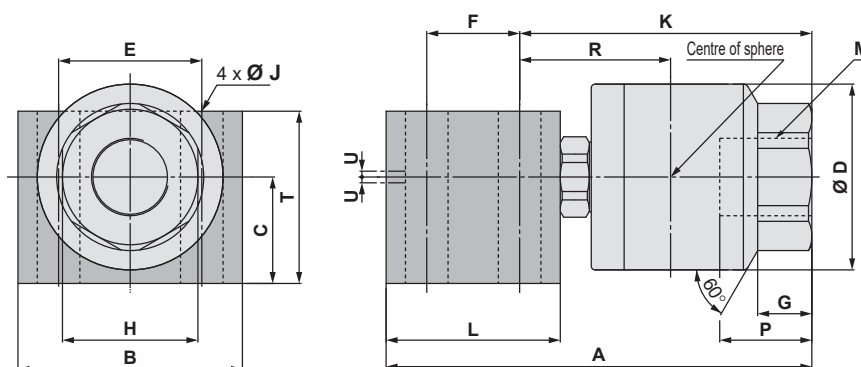


Dimensions

Applicable bore size	Model	M		A	B	C	D	E	F	K	L	T	J	G	H	Centre of sphere R	Maximum screw-in depth P	Allowable eccentricity U	Maximum operating tensile and compressive force [N]	Weight [kg]
		Nominal size	Pitch																	
180	JAL180-40-150-X530	40	1.5	220	116	55	96	74	48	151	90	89	22	28	70	78	49	3	55000	10.3
200	JAL200-45-150-X530	45	1.5	220	116	55	96	74	48	151	90	89	22	28	70	78	49	3	55000	10.4

Rod End Nut

The basic type has one rod end nut attached, it is possible to order additional pieces by the order numbers below.

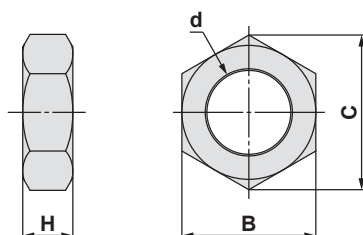

Model	Order no.	d: Nominal thread size	H	B	C
JAL180-40-150-X530	DA00425	M40 x 1.5	23	60	69.3
JAL200-45-150-X530	DA00447	M45 x 1.5	27	70	80.8

Floating Joint Replacement Parts

Dust cover

When the dust cover is damaged and deteriorated, order with the part number below.

Replaceable dust cover is only for the basic type. Flange type and foot type cannot be replaced.

Part no. for dust cover	Applicable model
P215295	JA180, 200-□-X530



Floating Joint: Heavy Load Type

JAH Series

RoHS

Specifications

Operating pressure	Hydraulic cylinder: 7 MPa or less
Mounting	Basic type, Flange type, Foot type

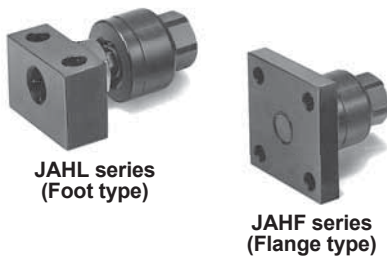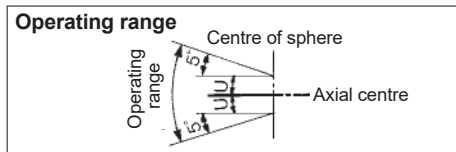

Specifications

Model	Applicable bore size [mm]	Applicable cylinder nominal thread size	Maximum operating tension and compression force [N]			Allowable eccentricity U [mm]	Rotating angle	Ambient temperature
			Basic type	Flange type	Foot type			
Standard/Thread nominal size								
JAH□40-16-150	40	M16 x 1.5	11000	9000	9000	1.25	±5°	-5 to 60 °C
JAH□50-20-150	50	M20 x 1.5	18000	14000	14000	2		
JAH□63-24-150	63	M24 x 1.5	28000	22000	22000	2		
JAH□80-30-150	80	M30 x 1.5	54000	36000	36000	2.5		
JAH□100-39-150	100	M39 x 1.5	71000	55000	55000	3		
JAH□100-48-150	100	M48 x 1.5	71000	55000	55000	3		
Semi-standard/Thread nominal size								
JAH□63-24-200	63	M24 x 2	28000	22000	22000	2	±5°	
JAH□80-30-200	80	M30 x 2	54000	36000	36000	2.5		
JAH□100-42-300	100	M42 x 3	71000	55000	55000	3		

How to Order

JA H F 40 - 16-150 -			Option	
Heavy load type			—	None
Mounting type			X11	High temperature specifications -5 to 100 °C
Applicable bore size [mm]			Thread nominal size (Standard)	
Heavy load type	Model	Symbol	Nominal thread size	Applicable cylinder nominal thread size
	40	40	16-150	M16 x 1.5
	50	50	20-150	M20 x 1.5
	63	63	24-150	M24 x 1.5
	80	80	30-150	M30 x 1.5
	100	100	39-150	M39 x 1.5
			48-150	M48 x 1.5

⚠ Precautions

Be sure to read this before handling the products. Refer to back page for Safety Instructions.

Mounting

⚠ Warning

- To screw the male threads of the rod into the female threads of the socket or the case, make sure that it does not bottom out. If the floating joint is used with its rod bottomed out, the stud will not be able to float, causing damage. For the screw-in depth of the female threads, refer to the dimensions (page 9). As a rule, after the rod bottoms out, back off 1 to 2 turns.
- The dust cover may adhere to the stud. In this case, move the dust cover at the neck of the stud by the finger or twist the stud slightly left or right to break in the dust cover before use.

Additionally, when screwing the stud and socket or the case into a driven body, screw in such parts with the dust cover removed. When screwing in such parts without removing the dust cover, this may cause damage to the dust cover.

- To use a floating joint to connect the cylinder rod to a driven body, secure it in place by applying a torque that is appropriate for the thread size. Also, if there is a risk of loosening during operation, take measures to prevent loosening, such as using a locking pin or thread adhesive.
In the event that the connected portion becomes loose, the driven body might lose control or fall off, leading to equipment damage or injury to personnel.
- This product is not a rotary joint. So, the product cannot be used for rotational or rotation acting applications.
- Be sure to use the cushion mechanism of the cylinder or the buffer mechanism, such as the shock absorber so that any impact force is not applied to the floating joint when stopping a driven body. If there is no buffer mechanism, an excessive impact force is generated. As a result, the tensile compression force of the floating joint may exceed its maximum level.

Maintenance


⚠ Warning

- Do not reuse if disassembled.
High strength adhesive is applied to the portion of the connection that is threaded to prevent it from loosening, and it must not be disassembled. If it is forcefully disassembled, it could lead to damage.

⚠ Caution

- The black zinc chromate treatment is applied to the material surfaces of the case, flange and foot. However, the white deposit may rarely occur on the surface. This white deposit does not affect the product functions. However, if the white deposit becomes a problem from a viewpoint of appearance, special products with the surface treatment changed to the electroless nickel plating are also available. For details, please contact SMC.

Construction

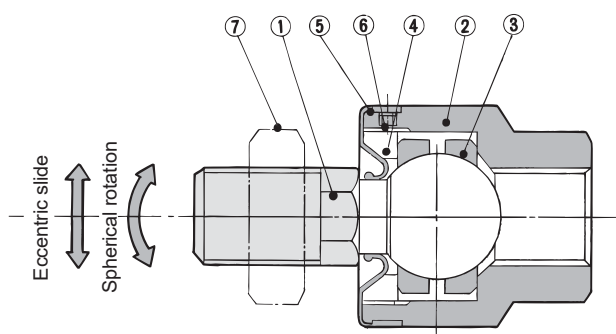


Refer to page 2 for replacement Parts.

Component Parts


No.	Description	Material	Note
1	Stud	Chromium molybdenum steel	Dyed black
2	Case	Carbon steel	Black zinc chromated
3	Ring	Chromium molybdenum steel	
4	Cap	Carbon steel	Black zinc chromated
5	Dust cover	Synthetic rubber	
6	Set screw	Carbon steel	Zinc chromated
7	Rod end nut	Carbon steel	Zinc chromated
8	Flange	Rolled steel plate	Black zinc chromated
9	Foot	Rolled steel plate	Black zinc chromated

Basic Type: JAH

JAH40 to 100

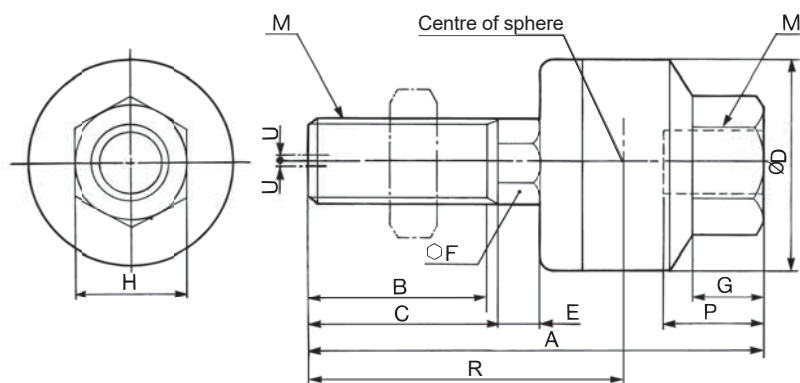


Without C-dimension



Applicable bore size [mm]	Model	M		A	B	C	D	E	F	G	H	Centre of sphere R	Maximum thread depth P	Allowable eccentricity U	Maximum operating tension and compression force [N]	Weight [kg]
		Nominal size	Pitch													
Standard: Heavy Load Type Hydraulic: Up to 7 MPa																
40	JAH40-16-150	16	1.5	85.5	22	25	50	9.5	19	16	32	52.5	18	1.25	11000	0.58
50	JAH50-20-150	20	1.5	101	28	31	59.5	11.5	24	16	32	64	18	2	18000	1.08
63	JAH63-24-150	24	1.5	120	32	35	66	13	27	20	41	74	24	2	28000	1.5
80	JAH80-30-150	30	1.5	152	42	45	79	14	30	22	46	94.5	38	2.5	54000	2.7
100	JAH100-39-150	39	1.5	178	52	55	96	16	36	24	55	112	42	3	71000	4.8
100	JAH100-48-150	48	1.5	191	61	—	96	16	36	28	70	118	49	3	71000	5.4
Semi-standard: Heavy Load Type Hydraulic: Up to 7 MPa																
63	JAH63-24-200	24	2	120	32	35	66	13	27	20	41	74	24	2	28000	1.5
80	JAH80-30-200	30	2	152	41	45	79	14	30	22	46	94.5	38	2.5	54000	2.7
100	JAH100-42-300	42	3	178	55	—	96	16	36	24	55	112	42	3	71000	4.8

Flange Type: JAFH

JAFH40 to 100

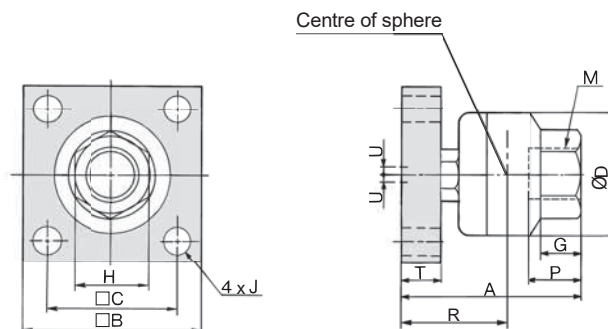


																[mm]
Applicable bore size [mm]	Model	M		A	B	C	D	T	J	G	H	Centre of sphere R	Maximum thread depth P	Allowable eccentricity U	Maximum operating tension and compression force [N]	Weight [kg]
		Nominal size	Pitch													
Standard: Heavy Load Type Hydraulic: Up to 7 MPa																
40	JAHF40-16-150	16	1.5	76	75	50	50	15	11	16	32	43	18	1.25	9000	1.25
50	JAHF50-20-150	20	1.5	89	100	62	59.5	18	14	16	32	52	18	2	14000	2.5
63	JAHF63-24-150	24	1.5	106	100	72	66	21	18	20	41	60	24	2	22000	2.8
80	JAHF80-30-150	30	1.5	131	125	82	79	24	18	22	46	73.5	38	2.5	36000	5.2
100	JAHF100-39-150	39	1.5	152	150	100	96	29	22	24	55	86	42	3	55000	9
100	JAHF100-48-150	48	1.5	159	150	100	96	29	22	28	70	86	49	3	55000	9.3

Semi-standard: Heavy Load Type


Hydraulic: Up to 7 MPa																
63	JAHF63-24-200	24	2	106	100	72	66	21	18	20	41	60	24	2	22000	2.8
80	JAHF80-30-200	30	2	131	125	82	79	24	18	22	46	73.5	38	2.5	36000	5.2
100	JAHF100-42-300	42	3	152	150	100	96	29	22	24	55	86	42	3	55000	9

Foot Type: JAHL

JAHL40, 50

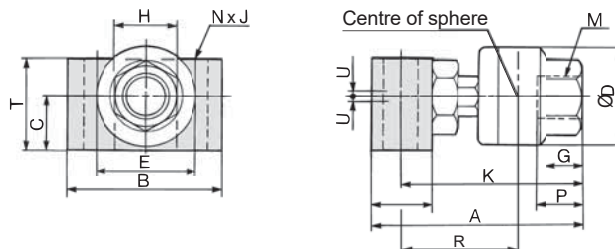

JAHL63 to 100

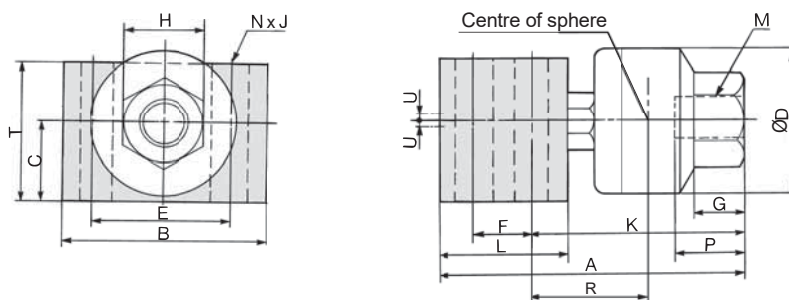

Applicable bore size [mm]	Model	M		A	B	C	D	E	F	K	L	T	N	J	G	H	Centre of sphere R	Maximum thread depth P	Allowable eccentricity U	Maximum operating tension and compression force [N]	Weight [kg]	
		Nominal size	Pitch																			
Standard: Heavy Load Type Hydraulic: Up to 7 MPa																						
40	JAHL40-16-150	16	1.5	98.5	70	28	50	42	—	86	25	47	2	14	16	32	53	18	1.25	9000	1.09	
50	JAHL50-20-150	20	1.5	123	80	35	59.5	48	—	107	32	58	2	16	20	41	65	24	2	14000	2.03	
63	JAHL63-24-150	24	1.5	155	88	38	66	54	36	102	70	69	4	18	20	41	56	24	2	22000	4.1	
80	JAHL80-30-150	30	1.5	187	96	45	79	60	44	125	80	79	4	18	22	46	67.5	38	2.5	36000	6.4	
100	JAHL100-39-150	39	1.5	213	116	55	96	74	48	144	90	89	4	22	24	55	78	42	3	55000	10	
100	JAHL100-48-150	48	1.5	220	116	55	96	74	48	151	90	89	4	22	28	70	78	49	3	55000	10.5	

Semi-standard: Heavy Load Type

Hydraulic: Up to 7 MPa																					
63	JAHL63-24-200	24	2	155	88	38	66	54	36	102	70	69	4	18	20	41	56	24	2	22000	4.1
80	JAHL80-30-200	30	2	187	96	45	79	60	44	125	80	79	4	18	22	46	67.5	38	2.5	36000	6.4
100	JAHL100-42-300	42	3	213	116	55	96	74	48	144	90	89	4	22	24	55	78	42	3	55000	10


Floating Joint: For Compact Cylinders

JB Series

RoHS

Specifications

Operating pressure	Air pressure compact cylinder 1 MPa or less
--------------------	--

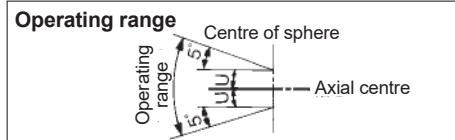

Specifications

Model	Applicable bore size [mm]	Applicable cylinder nominal thread size	Maximum operating tension and compression force [N]		Allowable eccentricity U [mm]	Rotating angle	Ambient temperature
			Compression side	Tension side			
JB12-3-050	12	M3 x 0.5	112	112	0.5	±5°	-5 to 60°C
JB16-4-070	16	M4 x 0.7	200	200	0.5		
JB20-5-080	20	M5 x 0.8	1100	300	0.5		
JB25-6-100	25	M6 x 1	2500	500	0.5		
JB40-8-125	32, 40	M8 x 1.25	6000	1300	0.75		
JB63-10-150	50, 63	M10 x 1.5	11000	3100	1		
JB80-16-200	80	M16 x 2	18000	5000	1.25		
JB100-20-250	100	M20 x 2.5	28000	7900	2		
JB140-22-250	125, 140	M22 x 2.5	54000	15300	2.5		
JB160-24-300	160	M24 x 3	71000	20000	3		

How to Order

JB

40

8-125

For compact cylinders/
Female thread

Option

—	None
X11	High temperature specifications -5 to 100 °C

Applicable bore size [mm]

Thread nominal size

Symbol	Applicable bore size [mm]
12	12
16	16
20	20
25	25
40	32, 40
63	50, 63
80	80
100	100
140	125, 140
160	160

Nominal thread size	Applicable cylinder nominal thread size
3-050	M3 x 0.5
4-070	M4 x 0.7
5-080	M5 x 0.8
6-100	M6 x 1
8-125	M8 x 1.25
10-150	M10 x 1.5
16-200	M16 x 2
20-250	M20 x 2.5
22-250	M22 x 2.5
24-300	M24 x 3

⚠ Precautions

Be sure to read this before handling the products. Refer to back page for Safety Instructions.

Mounting

⚠ Warning

- To screw the male threads of the rod into the female threads of the socket or the case, make sure that it does not bottom out. If the floating joint is used with its rod bottomed out, the stud will not be able to float, causing damage. For the screw-in depth of the female threads, refer to the dimensions (page 12). As a rule, after the rod bottoms out, back off 1 to 2 turns.
- The dust cover may adhere to the stud. In this case, move the dust cover at the neck of the stud by the finger or twist the stud slightly left or right to break in the dust cover before use.

Additionally, when screwing the stud and socket or the case into a driven body, screw in such parts with the dust cover removed. When screwing in such parts without removing the dust cover, this may cause damage to the dust cover.

- To use a floating joint to connect the cylinder rod to a driven body, secure it in place by applying a torque that is appropriate for the thread size. Also, if there is a risk of loosening during operation, take measures to prevent loosening, such as using a locking pin or thread adhesive. In the event that the connected portion becomes loose, the driven body might lose control or fall off, leading to equipment damage or injury to personnel.
- This product is not a rotary joint. So, the product cannot be used for rotational or rotation acting applications.
- Be sure to use the cushion mechanism of the cylinder or the buffer mechanism, such as the shock absorber so that any impact force is not applied to the floating joint when stopping a driven body. If there is no buffer mechanism, an excessive impact force is generated. As a result, the tensile compression force of the floating joint may exceed its maximum level.

Maintenance

⚠ Warning


- Do not reuse if disassembled. High strength adhesive is applied to the portion of the connection that is threaded to prevent it from loosening, and it must not be disassembled. If it is forcefully disassembled, it could lead to damage.

⚠ Caution


- The black zinc chromate treatment is applied to the material surfaces of the case, flange and foot. However, the white deposit may rarely occur on the surface. This white deposit does not affect the product functions. However, if the white deposit becomes a problem from a viewpoint of appearance, special products with the surface treatment changed to the electroless nickel plating are also available. For details, please contact SMC.

Construction

Ø 12, Ø 16



Ø 20 to Ø 160

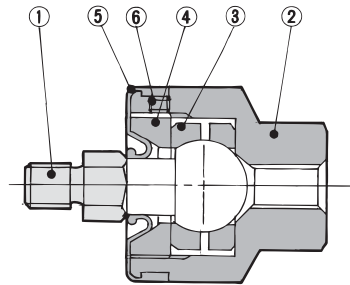

Component Parts


No.	Description	Material	Note
1	Stud	Free-cutting steel	Electroless nickel plated
2	Case	Brass	Electroless nickel plated
3	Ring	Stainless steel	
4	Socket	Brass	Electroless nickel plated
5	Dust cover	Synthetic rubber	

Refer to page 2 for replacement Parts.


No.	Description	Material	Note
1	Stud	Chromium molybdenum steel	Dyed black
2	Case	Carbon steel	Black zinc chromated
3	Ring	Chromium molybdenum steel	
4	Cap	Carbon steel	Black zinc chromated
5	Dust cover	Synthetic rubber	
6	Set screw	Carbon steel	Zinc chromated

Basic Type: JB

JB20, 16

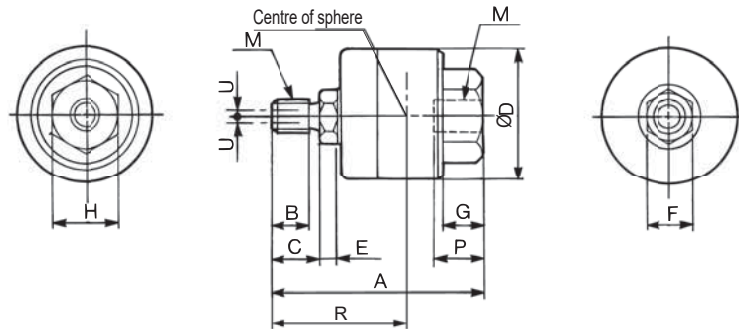

JB20 to 160

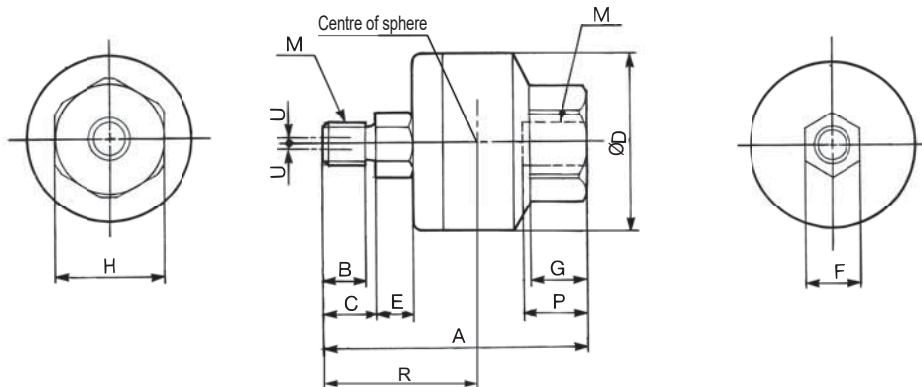

Applicable bore size [mm]	Model	M		A	B	C	D	E	F	G	H	Centre of sphere R	Maximum thread depth P	Allowable eccentricity U	Maximum operating tension and compression force [N]		Weight [kg]
		Nominal size	Pitch												Compression	Tension	
12	JB12-3-050	3	0.5	24.5	3	4	16	2	6	5	10	13	7	0.5	112	112	0.02
16	JB16-4-070	4	0.7	26.5	4.5	6	16	2	6	5	10	15	7	0.5	200	200	0.02
20	JB20-5-080	5	0.8	33	5	6.5	21	4.5	7	7	13	19.5	8	0.5	1100	300	0.04
25	JB25-6-100	6	1	38	6	8	24	5	8	8	17	22.5	9	0.5	2500	500	0.07
32, 40	JB40-8-125	8	1.25	51	8.5	11	31	6	11	11	22	29	13	0.75	6000	1300	0.15
50, 63	JB63-10-150	10	1.5	62.5	10	13	41	7.5	14	13.5	27	35.5	15	1	11000	3100	0.29
80	JB80-16-200	16	2	80.5	16	20	50	9.5	19	16	32	47.5	18	1.25	18000	5000	0.56
100	JB100-20-250	20	2.5	101	21	26	59.5	11.5	24	20	41	59	24	2	28000	7900	1.04
125, 140	JB140-22-250	22	2.5	129	17	22	79	14	30	22	46	71.5	38	2.5	54000	15300	2.6
160	JB160-24-300	24	3	149	20	26	96	16	36	24	55	83	42	3	71000	20000	4.5


Floating Joint: Stainless Steel Type

JS Series

RoHS

Specifications

Operating pressure	Pneumatic cylinder: 1 MPa or less
	Hydraulic cylinder: 3.5 MPa or less
Mounting	Basic type

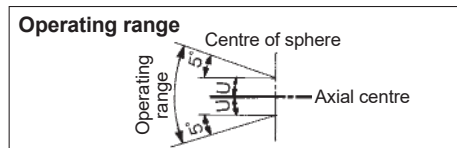

⚠ Precautions

Be sure to read this before handling the products. Refer to back page for Safety Instructions.

Mounting

⚠ Warning

- For the screw-in depth of the female threads, refer to the dimensions (page 15).
- The dust cover may adhere to the stud. In this case, move the dust cover at the neck of the stud by the finger or twist the stud slightly left or right to break in the dust cover before use.
Additionally, when screwing the stud and socket or the case into a driven body, screw in such parts with the dust cover removed. When screwing in such parts without removing the dust cover, this may cause damage to the dust cover.
- To use a floating joint to connect the cylinder rod to a driven body, secure it in place by applying a torque that is appropriate for the thread size. Also, if there is a risk of loosening during operation, take measures to prevent loosening, such as using a locking pin or thread adhesive.
In the event that the connected portion becomes loose, the driven body might lose control or fall off, leading to equipment damage or injury to personnel.
- This product is not a rotary joint. So, the product cannot be used for rotational or rotation acting applications.
- Be sure to use the cushion mechanism of the cylinder or the buffer mechanism, such as the shock absorber so that any impact force is not applied to the floating joint when stopping a driven body. If there is no buffer mechanism, an excessive impact force is generated. As a result, the tensile compression force of the floating joint may exceed its maximum level.

Specifications

Model	Applicable bore size [mm]	Applicable cylinder nominal thread size	Maximum operating tension and compression force (N)	Allowable eccentricity U [mm]	Operating pressure		Ambient temperature
					pneumatic cylinder	Hydraulic cylinder	
JS10-4-070	10	M4 x 0.7	80	0.5	1 MPa or less	—	-5 to 70 °C
JS16-5-080	10, 16	M5 x 0.8	210	0.5			
JS20-8-125	20	M8 x 1.25	1100	0.5			
JS32-10-125	25, 32	M10 x 1.25	2500	0.5			
JS40-14-150	40	M14 x 1.5	6000	0.75			
JS63-18-150	50, 63	M18 x 1.5	11000	1		3.5 MPa ⁽²⁾ or less	

Note 1) Think of applicable bore size as a guide. For details, confirm the rod end thread diameter of a cylinder to be used in the catalogue.

Note 2) For 3.5 MPa hydraulic cylinders, operate within the maximum tension and compression force.

How to Order


J	S	32	—	10-125	
Stainless steel type		Applicable bore size [mm]		Nominal thread size	
		Symbol		Applicable cylinder nominal thread size	
		10		4-070	
		16		5-080	
		20		8-125	
		32		10-125	
		40		14-150	
		63		18-150	

Note)

80	80
100	100

Made to Order: Individual Specifications -X530

Note) For details, refer to page 16.
For pneumatic cylinders

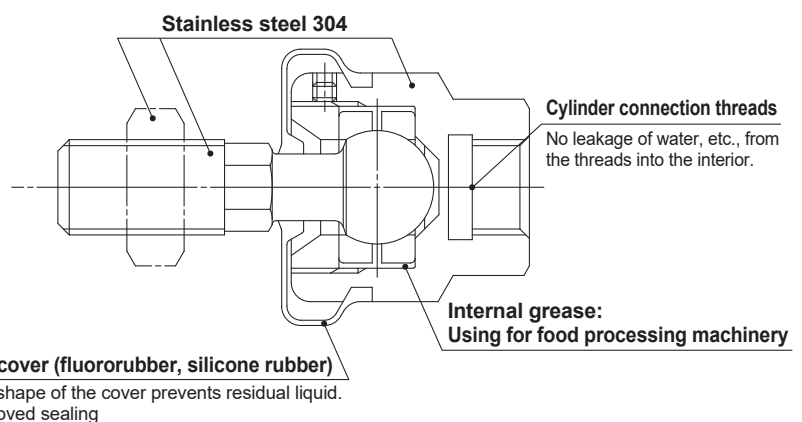

Maintenance



⚠ Warning

- Do not reuse if disassembled.
High strength adhesive is applied to the portion of the connection that is threaded to prevent it from loosening, and it must not be disassembled. If it is forcefully disassembled, it could lead to damage.

Construction

ø10, ø16

Ø 20 to Ø 63

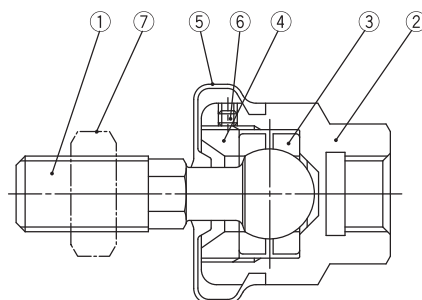

Component Parts

No.	Description	Material	Note
1	Stud	Stainless steel	
2	Case	Stainless steel	
3	Ring	Stainless steel	
4	Socket	Stainless steel	
5	Dust cover	Fluororubber/Silicon rubber	
6	Rod end nut	Stainless steel	

Component Parts

No.	Description	Material	Note
1	Stud	Stainless steel (Thread parts)	Electroless nickel plated
2	Case	Stainless steel	
3	Ring	Chromium molybdenum steel	Electroless nickel plated
4	Cap	Carbon steel	Electroless nickel plated
5	Dust cover	Fluororubber/Silicon rubber	
6	Set screw	Carbon steel	
7	Rod end nut	Stainless steel	

Replacement Parts


Dust cover

When the dust cover is damaged and deteriorated, order with the part number as shown below.

Model	Part no. for dust cover	
	Fluoro rubber	Silicon rubber
JS10	P21530511	P21530512
JS16	P21530521	P21530522
JS20	P2153151	P2153152
JS32	P2153251	P2153252
JS40	P2153351	P2153352
JS63	P2153451	P2153452

Rod end nut


One rod end nut is supplied with the JS series. If additional nuts are needed, please order them using the part no. shown below.




Model	Order no.	d: Thread nominal size	H	B	C
JS10-4-070	DA00127	M4×0.7	3.2	7	8.1
JS16-5-080	DA00128	M5×0.8	4	8	9.2
JS20-8-125	DA00036	M8×1.25	5	13	15
JS32-10-125	DA00006	M10×1.25	6	17	19.6
JS40-14-150	DA00186	M14×1.5	8	22	25.4
JS63-18-150	DA00188	M18×1.5	11	27	31.2

Dimensions



JS10, 16



* Use the precision spanner for clock 4 mm in the case of mounting male thread of JS10.

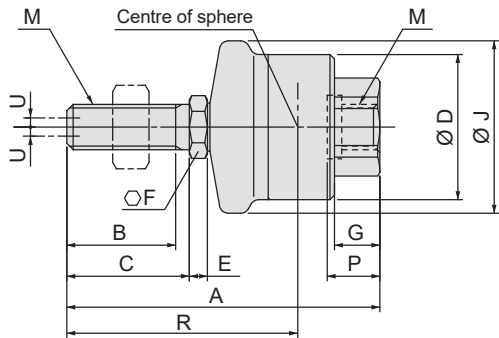

JS20, 32, 40, 63

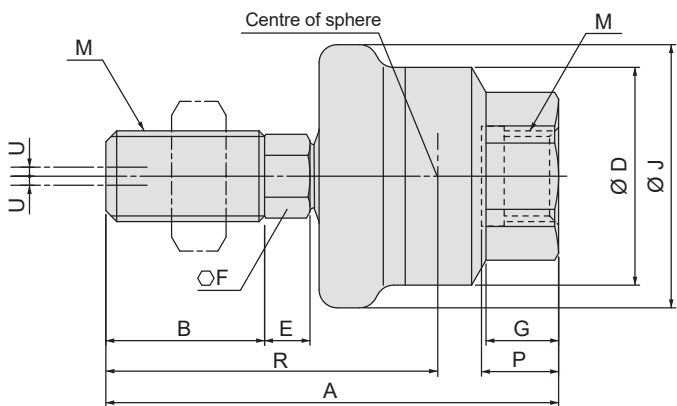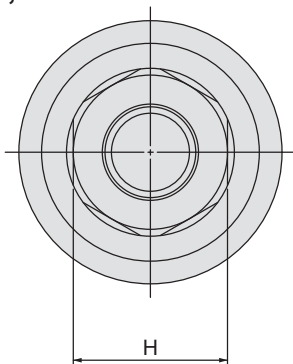

[mm]															
Model	M	A	B	C	D	E	F	G	H	J	Centre of sphere R	Max. thread depth P	Allowable eccentricity U	Max. operating tension and compression force [N]	Weight [kg]
JS10-4-070	M4 x 0.7	26	8.5	9.5	12	1.5	4	4	7	14.4	17	4.7	0.5	80	0.01
JS16-5-080	M5 x 0.8	34.5	12	13.5	16	2	6	5	10	19	23	5.8	0.5	210	0.02
JS20-8-125	M8 x 1.25	43.9	15.5	—	21	4.5	7	7	13	24.8	29.9	7.3	0.5	1100	0.05
JS32-10-125	M10 x 1.25	49.5	17.5	—	24	5	8	8	17	29	33.5	8.5	0.5	2500	0.08
JS40-14-150	M14 x 1.5	60	18.5	—	31	5	11	11	22	38.4	38	11.6	0.75	6000	0.16
JS63-18-150	M18 x 1.5	74.5	23	—	41	7	14	13.5	27	49.2	47.5	14.3	1	11000	0.31

1 For Pneumatic Cylinders: For Ø 80, Ø 100

Symbol

-X530

Applicable to the floating joint and stainless steel type JS series and used for pneumatic cylinders with bore sizes of Ø 80 and Ø 100.


* This product is dedicated to the pneumatic cylinders.

Model/Specifications

Model	Applicable cylinder				Maximum operating tensile and compressive force N	Allowable eccentricity U [mm]	Ambient temperature (°C)	Weight [kg]
	Bore size [mm] ^{Note)}	Nominal thread size	Dust cover material	Operating pressure				
JS80-22-150-X530	Ø 80	M22 x 1.5	Fluororubber	1 MPa or less	5000	1.25	- 5 to 70	0.58
JS80-22-150S-X530			Silicone rubber					
JS100-26-150-X530	Ø 100	M26 x 1.5	Fluororubber		7850	2		1.05
JS100-26-150S-X530			Silicone rubber					


Note) Think of applicable bore size as a guide. For details, confirm the rod end thread diameter of a cylinder to be used in the catalogue.

Dimensions

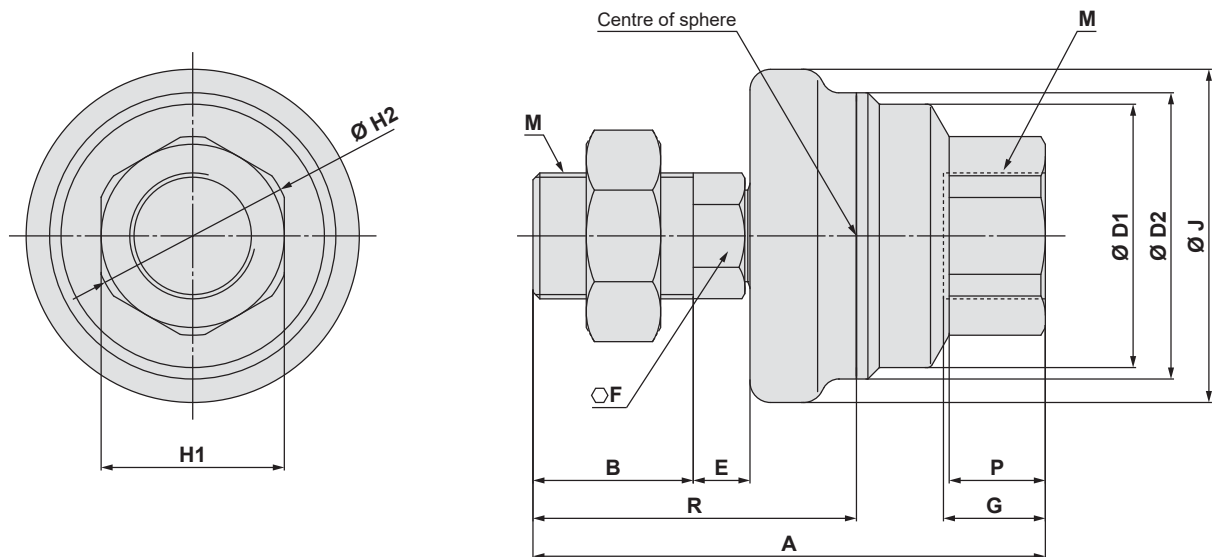

Rod end nut

One rod end nut is supplied with the JS series. If additional nuts are needed, please order them using the part no. shown below.

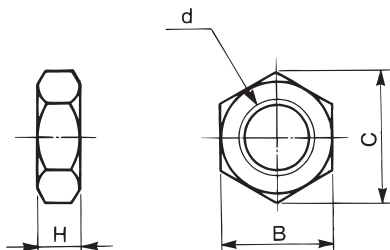

Model	Order no.	d: Nominal thread size	H	B	C
JS80-22-150(S)-X530	DA00243	M22 x 1.5	13	32	37
JS100-26-150(S)-X530	DA00189	M26 x 1.5	16	41	47.3

Dimensions

Model	M	A	B	D1	D2	E	F	G	H1	H2	J	Centre of sphere R	Maximum thread depth P	Allowable eccentricity U	Maximum operating tensile and compressive force [N]	Weight [kg]
JS80-22-150(S)-X530	M22 x 1.5	89.5	28	46	50	99	19	14	32	34.7	57.2	56.5	16.8	1.25	5000	0.58
JS100-26-150(S)-X530	M26 x 1.5	110	34	55.5	59.5	11.4	24	19.5	41	44.4	66.2	68	21	2	7850	1.05

Safety Instructions

These safety instructions are intended to prevent hazardous situations and/or equipment damage. These instructions indicate the level of potential hazard with the labels of “Caution,” “Warning” or “Danger.” They are all important notes for safety and must be followed in addition to International Standards (ISO/IEC)¹⁾, and other safety regulations.

-  **Caution:** **Caution** indicates a hazard with a low level of risk which, if not avoided, could result in minor or moderate injury.
-  **Warning:** **Warning** indicates a hazard with a medium level of risk which, if not avoided, could result in death or serious injury.
-  **Danger:** **Danger** indicates a hazard with a high level of risk which, if not avoided, will result in death or serious injury.

- 1) ISO 4414: Pneumatic fluid power – General rules relating to systems.
ISO 4413: Hydraulic fluid power – General rules relating to systems.
IEC 60204-1: Safety of machinery – Electrical equipment of machines.
(Part 1: General requirements)
ISO 10218-1: Manipulating industrial robots - Safety.
etc.

Warning

- The compatibility of the product is the responsibility of the person who designs the equipment or decides its specifications.**
Since the product specified here is used under various operating conditions, its compatibility with specific equipment must be decided by the person who designs the equipment or decides its specifications based on necessary analysis and test results. The expected performance and safety assurance of the equipment will be the responsibility of the person who has determined its compatibility with the product. This person should also continuously review all specifications of the product referring to its latest catalogue information, with a view to giving due consideration to any possibility of equipment failure when configuring the equipment.
- Only personnel with appropriate training should operate machinery and equipment.**
The product specified here may become unsafe if handled incorrectly. The assembly, operation and maintenance of machines or equipment including our products must be performed by an operator who is appropriately trained and experienced.
- Do not service or attempt to remove product and machinery/equipment until safety is confirmed.**
 - The inspection and maintenance of machinery/equipment should only be performed after measures to prevent falling or runaway of the driven objects have been confirmed.
 - When the product is to be removed, confirm that the safety measures as mentioned above are implemented and the power from any appropriate source is cut, and read and understand the specific product precautions of all relevant products carefully.
 - Before machinery/equipment is restarted, take measures to prevent unexpected operation and malfunction.
- Contact SMC beforehand and take special consideration of safety measures if the product is to be used in any of the following conditions.**
 - Conditions and environments outside of the given specifications, or use outdoors or in a place exposed to direct sunlight.
 - Installation on equipment in conjunction with atomic energy, railways, air navigation, space, shipping, vehicles, military, medical treatment, combustion and recreation, or equipment in contact with food and beverages, emergency stop circuits, clutch and brake circuits in press applications, safety equipment or other applications unsuitable for the standard specifications described in the product catalogue.
 - An application which could have negative effects on people, property, or animals requiring special safety analysis.
 - Use in an interlock circuit, which requires the provision of double interlock for possible failure by using a mechanical protective function, and periodical checks to confirm proper operation.

Caution

- The product is provided for use in manufacturing industries.**
The product herein described is basically provided for peaceful use in manufacturing industries.
If considering using the product in other industries, consult SMC beforehand and exchange specifications or a contract if necessary.
If anything is unclear, contact your nearest sales branch.

Limited warranty and Disclaimer/Compliance Requirements

The product used is subject to the following “Limited warranty and Disclaimer” and “Compliance Requirements”. Read and accept them before using the product.

Limited warranty and Disclaimer

- The warranty period of the product is 1 year in service or 1.5 years after the product is delivered, whichever is first.²⁾ Also, the product may have specified durability, running distance or replacement parts. Please consult your nearest sales branch.
- For any failure or damage reported within the warranty period which is clearly our responsibility, a replacement product or necessary parts will be provided. This limited warranty applies only to our product independently, and not to any other damage incurred due to the failure of the product.
- Prior to using SMC products, please read and understand the warranty terms and disclaimers noted in the specified catalogue for the particular products.
- Vacuum pads are excluded from this 1 year warranty.
A vacuum pad is a consumable part, so it is warranted for a year after it is delivered. Also, even within the warranty period, the wear of a product due to the use of the vacuum pad or failure due to the deterioration of rubber material are not covered by the limited warranty.

Compliance Requirements

- The use of SMC products with production equipment for the manufacture of weapons of mass destruction (WMD) or any other weapon is strictly prohibited.
- The exports of SMC products or technology from one country to another are governed by the relevant security laws and regulations of the countries involved in the transaction. Prior to the shipment of a SMC product to another country, assure that all local rules governing that export are known and followed.

Caution

SMC products are not intended for use as instruments for legal metrology.

Measurement instruments that SMC manufactures or sells have not been qualified by type approval tests relevant to the metrology (measurement) laws of each country. Therefore, SMC products cannot be used for business or certification ordained by the metrology (measurement) laws of each country.

Safety Instructions

Be sure to read “Handling Precautions for SMC Products” (M-E03-3) before using.

SMC Corporation (Europe)

Austria	+43 (0)2262622800	www.smc.at	office@smc.at
Belgium	+32 (0)33551464	www.smc.be	info@smc.be
Bulgaria	+359 (0)2807670	www.smc.bg	office@smc.bg
Croatia	+385 (0)13707288	www.smc.hr	office@smc.hr
Czech Republic	+420 541424611	www.smc.cz	office@smc.cz
Denmark	+45 70252900	www.smc.dk.com	smc@smcdk.com
Estonia	+372 6510370	www.smc.pneumatics.ee	smc@info@smcee.ee
Finland	+358 207513513	www.smc.fi	smc@info@smc.fi
France	+33 (0)164761000	www.smc-france.fr	info@smc-france.fr
Germany	+49 (0)61034020	www.smc.de	info@smc.de
Greece	+30 210 2717265	www.smchellas.gr	sales@smchellas.gr
Hungary	+36 23513000	www.smc.hu	office@smc.hu
Ireland	+353 (0)14039000	www.smcautomation.ie	sales@smcautomation.ie
Italy	+39 03990691	www.smcitalia.it	mailbox@smcitalia.it
Latvia	+371 67817700	www.smc.lv	info@smc.lv

Lithuania	+370 5 2308118	www.smclt.lt	info@smclt.lt
Netherlands	+31 (0)205318888	www.smc.nl	info@smc.nl
Norway	+47 67129020	www.smc-norge.no	post@smc-norge.no
Poland	+48 222119600	www.smc.pl	office@smc.pl
Portugal	+351 214724500	www.smc.eu	apoioclientept@smc.smces.es
Romania	+40 213205111	www.smcromania.ro	smcromania@smcromania.ro
Russia	+7 8127185445	www.smc-pneumatik.ru	info@smc-pneumatik.ru
Slovakia	+421 (0)413213212	www.smc.sk	office@smc.sk
Slovenia	+386 (0)73885412	www.smc.si	office@smc.si
Spain	+34 945184100	www.smc.eu	post@smc.smces.es
Sweden	+46 (0)86031240	www.smc.nu	smc@smc.nu
Switzerland	+41 (0)523963131	www.smc.ch	info@smc.ch
Turkey	+90 212 489 0 440	www.smc.pnomatik.com.tr	info@smcpnomatik.com.tr
UK	+44 (0)845 121 5122	www.smc.uk	sales@smc.uk

South Africa +27 10 900 1233 www.smcza.co.za zasales@smcza.co.za