



IDL G-G

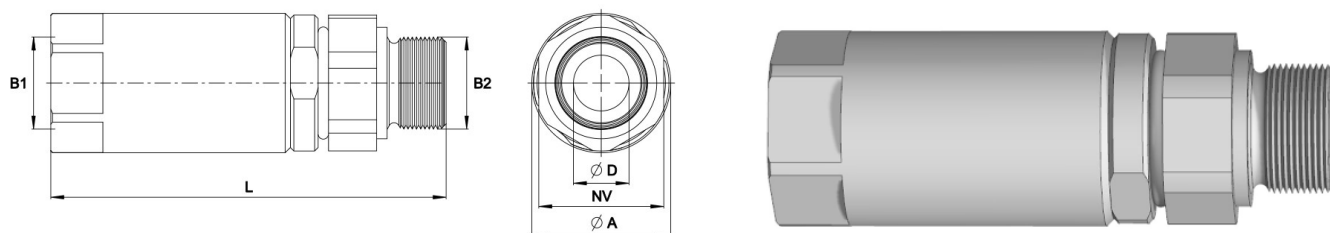

FEMALE X MALE

Part No.	B1	B2	L	ØA	ØD	NV	Weight	Max work pressure	Seal kit
5001285	G 1/2	G 1/2	98 mm	35 mm	12 mm	32 mm	0.52 kg	35 MPa	5001632
5001291	G 3/4	G 3/4	110 mm	40 mm	16 mm	36 mm	0.66 kg	35 MPa	5001633
5001294	G 1	G 1	117 mm	50 mm	20 mm	46 mm	1.11 kg	35 MPa	5001634
5001589	G 1 1/2	G 1 1/2	132 mm	65 mm	30 mm	60 mm	1.98 kg	30 MPa	5001636
5001590	G 1 1/4	G 1 1/4	122 mm	55 mm	25 mm	50 mm	1.27 kg	32 MPa	5001635
5001594	G 3/8	G 3/8	92 mm	35 mm	8 mm	32 mm	0.52 kg	36.5 MPa	5001631
5001597	G 1/4	G 1/4	85 mm	35 mm	6 mm	32 mm	0.51 kg	40 MPa	5001630
5001615	G 3/8	G 3/8	92 mm	35 mm	8 mm	32 mm	0.52 kg	35 MPa	5001638

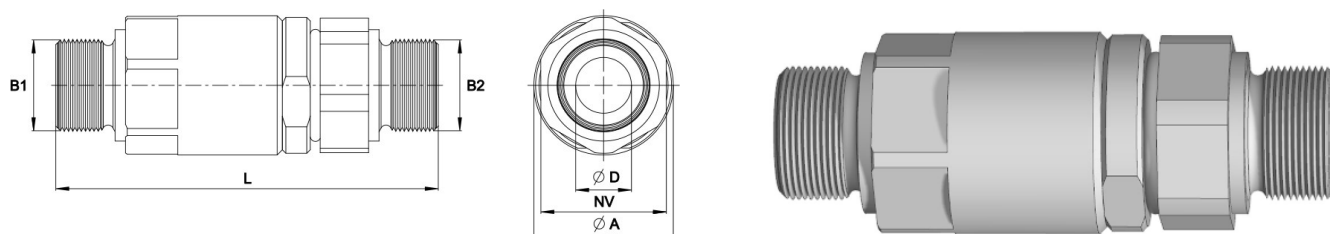

MALE X MALE

Part No.	B1	B2	L	ØA	ØD	NV	Weight	Max work pressure	Seal kit
5001275	G 3/4	G 3/4	106 mm	40 mm	16 mm	36 mm	0.58 kg	35 MPa	5001633
5001280	G 1/2	G 1/2	98 mm	35 mm	12 mm	32 mm	0.43 kg	35 MPa	5001637

G = BSP, 60° cone

Temperature range (standard) = -30° C - +100° C

Pressures as listed should be used as guide only
and not as a specification.

We reserve the right to make product changes. For further technical information relating to integration and hydraulic connections, please contact rotator@indexator.com