






5 Port Solenoid Valve

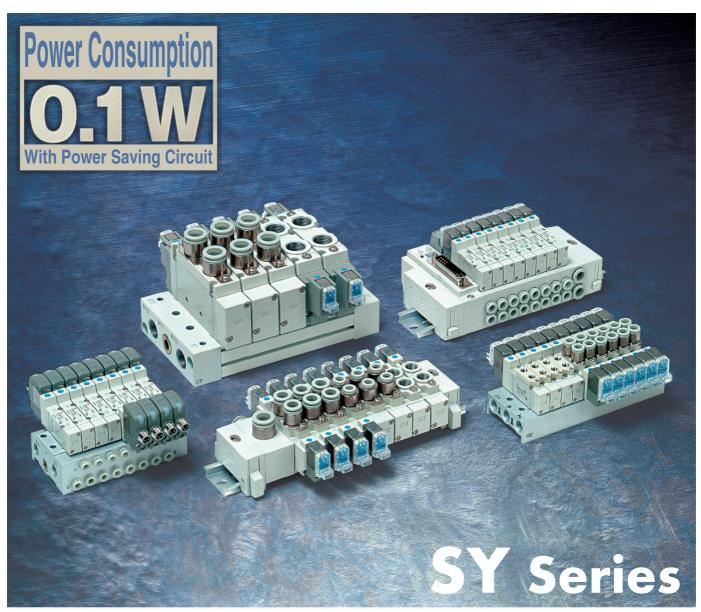

• Flow Characteristics

Corios		Flow ch	aracteristics	
Series	C [dm3/(s-bar)]	b	Cv	Q [/min(ANR)]
SY3000	1.1	0.28	0.29	276
SY5000	2.8	0.37	0.90	746
SY7000	4.5	0.28	1.4	1130
SY9000	10	0.29	2.5	2527


Long servise life

* Please contact SMC if life test data is required.


Cylinder Speed Chart

Use as a guide for selection. Please confirm the actual conditions with SMC Sizing Program.

Body Ported

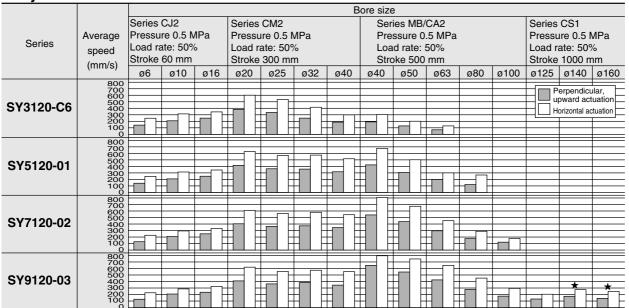

Base Mounted

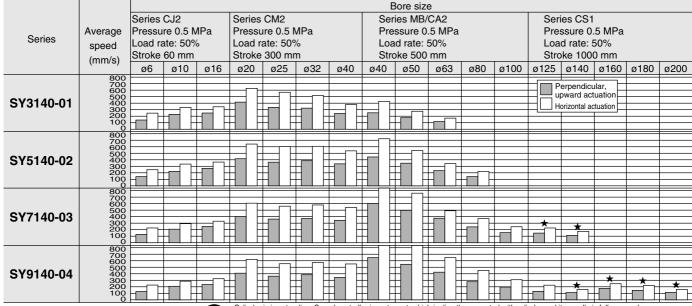

Cylinder is in extending. Speed controller is meter-out, which is directly connected with cylinder and its r Average speed of cylinder is obtained by dividing the full stroke time by the stroke. Load factor: ((Load weight > 9.8) Theoretical force) × 100% The histograms with ★ marked are the case when piping is done by using steel.

Conditions

Body	/ ported	Series CJ2	Series CM2	Series MB/CA2	Series CS1
	Tubing bore x Length	T	0604 x 1 r	n	_
SY3120-C6	Speed controller	Α	S2051F-0	6	_
	Silencer		AN120-M5	5	_
	Tubing bore x Length	T0604 x 1 m	T0806	3 x 1 m	_
SY5120-01	Speed controller	AS3001F-06	AS300	01F-08	_
	Silencer		AN101-01		_
	Tubing bore x Length	T0604 x 1 m	T1075	x 1 m	_
SY7120-02	Speed controller	AS3001F-06	AS400	01F-10	_
	Silencer		AN110-01		_
	Tubing bore x Length	T0604 x 1 m	T1075 x 1 m	T1209	x 1 m
SY9120-03	Speed controller	AS3001F-06	AS4001F-10	AS400)1F-12
	Silencer		AN200-02		AN202-02

Conditions [When using SGP (steel pipe)]

Body	/ ported	Series CS1
	Tubing bore x Length	SGP10A x 1 m
SY9120-03	Speed controller	AS420-03
	Silencer	AN200-02

Conditions

Base	mounted	Series CJ2	Series CM2	Series MB/CA2	Series CS1
	Tubing bore x Length	Т	0604 x 1 r	n	-
SY3140-01	Speed controller	Α	S3001F-0	6	-
	Silencer		AN110-01		_
	Tubing bore x Length	T0604 x 1 m	T0806	3 x 1 m	-
SY5140-02	Speed controller	AS3001F-06	AS300	01F-08	-
	Silencer		AN101-01		_
	Tubing bore x Length	T0604 x 1 m	T1075 x 1 m	T1209 x 1 m	-
SY7140-03	Speed controller	AS3001F-06	AS400	01F-10	-
	Silencer		AN200-02		_
	Tubing bore x Length	T0604 x 1 m	T1075 x 1 m	T1209	x 1 m
SY9140-04	Speed controller	AS3001F-06	AS4001F-10	AS400)1F-12
	Silencer		AN2	00-02	

Conditions [When using SGP (steel pipe)]

Base	mounted	Series CS1
	Tubing bore x Length	SGP10A x 1 m
SY7140-03	Speed controller	AS420-03
	Silencer	AN300-03
	Tubing bore x Length	SGP15A x 1 m
SY9140-04	Speed controller	AS420-04
	Silencer	AN400-04



Valve Variations

					Ac	tuat	ion		V	oltage	ı	Elect	rica	l ent	ry	Note 1)
			Sonic	2 po	sition	3 p	osit	ion	DC 24 V	AC 100 V 50/60 Hz		or	tor			suppres
	Series	5	conductance C [dm³/(s·bar)] { 4/2Æ5/3 (A/BÆEA/EB)}	Single	Double	Closed center	Exhaust center	Pressure center	12 V 6 V 5 V 3 V	50/60 Hz 110 V 50/60 Hz 200 V 50/60 Hz 220 V 50/60 Hz	Grommet	L plug connector	M plug connector	DIN terminal	M8 connector	Light/surge voltage suppressor
þ	P.1	SY3□20	0.65	•	•	•	•	•	•	•	•	•	•	•	•	•
Body ported		SY5□20	2.4	•			•	•				•		•	•	•
sody		SY7□20	3.3	•					•	•		•				•
ш		SY9□20	8.6	•	•	•	•	•	•	•	•	•	•	•	•	•
þ	P.19	SY3□40	1.1	•	•	•	•	•	•	•	•	•	•	•	•	•
ounte		SY5□40	2.8	•	•	•	•	•	•	•	•	•	•	•	•	•
Base mounted		SY7□40	4.5	•	•	•	•	•	•	•	•	•	•	•	•	•
Ва		SY9□40	10	•	•	•	•	•	•	•	•	•	•	•	•	
		Manual P	, EA, EB		^		nort						alvo			

			anu ⁄erri			F	P, E	ΞΑ, : siz	EE ze	3					/	۹, E	3 p	ort	siz	Э							Val	ve	op	tion		
	Series	Non-locking push type	Push-turn locking slotted type	Push-turn locking lever type		M5	1/8	1/4	3/6	1/2	M5	1/6	1/4	3/6	1/6		(One	e-to	ucl	n fit	tting	g		rottle	Oil resistant (Other than designated turbine oil)	Vacuum specifications	Low pressure specifications		Note 3)	egulator	/e SY
		Non-locking	Push-turn lock	Push-tum locl	Bracket	IVIO	78	74	78	72	IVIO	78	74	78	72		C6	C8	C10	C12	N3	N7	N9	N11	Exhaust throttle	Oil resistant (Other tha	Vacuum sp	Low pressure	Dual pressure	Enclosure IP65	Interface regulator	3 Port valve SY
75	SY3□20	•	•	•	•	•	_	_	_	_	•	_	_	_	_	•	•	_	_	_		•	_	_								•
Body ported	SY5□20	•	•	•	•	_	•	_	_	_	_	•	_	_	_	•	•	•	_	_	•	•	•	_								•
ody p	SY7□20	•	•	•	•	_	(EA, EB)	(P)	_	_	_	_	•	_	_	_	_	•	•	_	_	_	•	•			Pilot	External Pilot (Note 2)	Pilot	terminal		_
m	SY9□20	•	•	•	_	_	_	•	_	_	_	_	•	•	_	_	_	•	•	•	_	_		•			(Note 2)	(Note 2)	(Note 2)	connector		_
pa	SY3□40	•	•	•	_	_	•	_	_	_	_	•	_	_	_	_	_	_	_	_	_	_	_	_								•
Base mounted	SY5□40	•	•	•	_	_	_	•	_	_	_	_	•	_	_	_	_	_	_	_	_	_	_	_								•
ase m	SY7□40	•	•	•	_	_	_	•	•	_	_	_	•	•	_	_	_	_	_	_	_	_	_	_	Sub- plate		External pilot	External pilot	External pilot	DIN terminal		_
Ğ	SY9□40	•	•	•	_	_	_	_	•	•	_	_	_	•	•	_	_	_	_	_	_	_	_	_						M8 connector		_

[■] Standard ■ Option ▲ Made to order (Refer to page "Made to Order".)

Note 1) All AC voltage models have built-in surge voltage suppressor.

Note 4) SY3000 does not have a DIN terminal which can be connected to a manifold.



Note 2) Body ported external pilot type (made to order) is not available for DIN terminal.

Note 3) Only available for DIN terminal and M8 connector.

									Virin	g			
								nnect				Common sp	ecifications
	Manifold V	ariations		Valve Series	ndividual wiring	ribbon cable pins)	Flat ribbon cable (20 pins) connector box	in type D-sub ector (25 pins)	Plug-in type flat ribbon cable (26, 20, 10 pins)	n type terminal (9, 18 pins)	Serial transmission unit	Positive common	Negative common
				5 port	Indiv	Flat ribbo (26 pins)	Flat rib conne	Plug-in typ connector	Plug-i cable (Plug-in block (9	Seria unit	Posit	Nega
	Bar stock type Individual wiring		Туре 20	SY3□20									
	■ Direct piping to the main unit of a valve. Combination of			SY5□20		_	_	_	_	_	_	_	-
	different fittings is possible.			SY7□20									
	Bar stock type Flat ribbon cable		туре 20Р	SY3□20									Note)
	■ A 26 pins MIL connector permits One-touch wiring of			SY5□20	_		—	_	_	_	_	In cor	nmon
	external cables in a bundle.		- 00	SY7□20								111 001	
rted	Stacking type Individual wiring Manifold stations can be increased or dec	reased.	Туре 23	SY9□20	•	_	_	_	_		_		_
Body ported	Stacking type Flat ribbon cable Manifold stations can be increased or dec	reased.	туре 23Р	SY9□20	_	•	_	_	_	_		In cor	Note)
800	Bar stock type EX510 gateway type		Type 20SA	SY3□20									
"	Can be used with a serial transmission system.			SY5□20	_	_	—	_	_	_		_	-
				SY7□20									
	Stacking type EX510 gateway type Can be used with a serial transmission system.		Type 23SA	SY9□20	_	_	_	_	_	_	•	_	_
	Cassette type Individual wiring		Туре 60	SY3□60	•			_		_	_		
	■ Size and weight reduced by eliminating the manifold base			SY5□60	•	_	_	_	_	_	_	_	
	Similaring the marinoid base			SY7□60		_	_	_	_	_	_		_

[■] Standard ■ Option ▲ Made to order (Refer to page "Made to Order".)

Note) When there are polarities, the positive common specifications are used.

		Ma	anif	old	opt	ion							Α	, B												Va	lve	opt	ion					cuum
Blanking plate	Individual SUP spacer	Individual EXH spacer	SUP block disk	EXH block disk	Label for block disk	Silencer for One-touch fitting	Built-in silencer	Connector	M5	1/8	1/4	3/8			On	e-tc	oucl	n fit	ting	l		ked mounting	ort valve/Mixed	Oil resistant (Other than designated turbine oil)	Vacuum specifications	Low pressure specifications	Different pressure	Dual pressure	Exhaust throttle	Bundle wiring	Mixed fitting sizes	IP65 enclosure	Interface regulator	Valves with function/Vacuum release valve with restrictor
Blank	Individ	Individ	SUP	EXH	Label	Silencer	Built	Conn					C4	C6	C8	C10	C12	N3	N7	N9	N11	SY3000 SY5000	SY300 SY500	Oil resis	Vacuur	Low pres	Differ	Dual	Exha	Bund	Mixed		Interfa	Valves release
									•	_	_	_	•	•	_	_	_	•	•	_	_		•									Note)		_
			_	_	_	-	-	_	_	•	_	_	•	•	•	_	<u> </u>			•	_	-		A	_	_	Individual SUP	_	Individual EXH	_	_	Note)	_	
													_	_				_	_								interface		interface					
			_	_	_	_	_	_		•	_		•	•	•			•	•			_	•		_	_		_			_	_	_	•
									_	_	•	_	_	_	•	•	_	_	_	•	•		_				Individual SUP interface		Individual EXH interface)				_
		•		•	•	_	_	_	_	_	•	•	_	_	•	•	•	_	_	•	•	_	_	A	External pilot	External pilot	Individual SUP block disk	External pilot	Individual EXH		_	Note)		_
	•					_	_	_	_	_	•	•	_	_	•	•	•			•	•	_	_	•	External pilot	External pilot	Individual SUP block disk	External pilot	Individual EXH		_			
										_	_	_		•	_	_	_		•	_	_													_
				_	_	-	_		_		_	_		•		_	_				_	_			_	_	Individual	_	Individual		—	_	_	
									_	_		_	_	_		•	_	_	_	•			_				SUP interface		EXH interface					_
			_	_	_	_	_		_	_	•	•	_	_	•	•	•	_	_	•	•			•	External pilot	External pilot	Individual SUP block disk		Individual EXH		_	_	_	_
								_			_	_			_						_				External pilot	External pilot	Individual SUP block disk	Individual SUP block disk	_	_	_	Note)	_	
	_	_					_	_	_	•	_	_	•	•	•	_	_			•	_	_	-	A	External pilot	External pilot	Individual SUP block disk	Individual SUP block disk	_	_	_	Note)	_	_
	_	_					_	_	_	_		_	_	_			_	_	_			_			External pilot	External pilot	Individual SUP block disk	Individual SUP block disk	—	_	_	Note)	_	_

Note) When using DIN terminal or M8 connector. SY3000 does not have a DIN terminal which can be connected to a manifold.



						1	Wirin	g			
						nnect				Common s	pecification
	Manifold Variations	Valve Series	Individual wiring	t ribbon cable pins)	Flat ribbon cable (20 pins) connector box	Plug-in type D-sub connector (25 pins)	Plug-in type flat ribbon cable (26, 20, 10 pins)	Plug-in type terminal block (9, 18 pins)	Serial transmission unit	Positive common	Negative common
		5 port	Indiv	Flat r (26 p	Flat rib	Plug- conn	Plug-i cable	Plug-i block	Seria	Posit	Nega
	Compact bar stock type Individual wiring The base mounting facilitates maintenance after valves are changed.	SY3□40 SY5□40	•	_	_	_	_	_	_	_	_
	Compact bar stock type Flat ribbon cable ■ A 26 pins MIL connector permits one-touch wiring of external cables in a bundle.	SY3□40 SY5□40	_	•	_	_	_	_	_	In cor	Note)
	Bar stock type/Common external EXH Individual wiring The base mounting facilitates	SY3□40 SY5□40					_	_			
	maintenance after valves are changed. Vacuum/low pressure combination system is possible.	SY7□40									
	Bar stock type/Common external EXH Flat ribbon cable ■ A 26 pins MIL connector permits one-touch wiring of external cables in a bundle.	SY3□40 SY5□40	_	•	_	_	_	_	_	In cor	Note)
	s vacuum/low pressure combination system is possible. Stacking type Individual wiring	SY7□40 SY9□40								111 COI	
ed	Individual wiring ■ Manifold stations can be increased or decreased. Stacking type Type 43P										Note)
mounted	■ Manifold stations can be increased or decreased.	SY9□40		•	_		_	_	_	In cor	mmon
Base m	Bar stock type EX510 gateway type ■ Can be used with a serial transmission system.	SY3□40 SY5□40 SY7□40	_	_	_	_	_	_	•	_	_
m	Stacking type EX510 gateway type ■ Can be used with a serial transmission system.	SY9□40	_	_	_	_	_	_	•	_	_
	Stacking type/DIN rail mounted Individual wiring Stations can be increased on the DIN rail. Integrated mounting of other electric parts is possible, too.	SY3□40 SY5□40	•	_	_	_	_	_	_	_	_
	Stacking type/DIN rail mounted Connector box Stations can be increased or decreased on the DIN rail. The provided connector box permits one-touch connection of electric cables.	SY3□40 SY5□40	_	_	•	_	_	_	_	•	•
	Stacking type/DIN rail mounted EX510 gateway type Can be used with a serial transmission system.	SY3□40 SY5□40	_	_	_	_	_	_	•	_	_
	Stacking type/DIN rail mounted Plug-in Stations can be increased or decreased on the DIN rail.		_	_	_	•	•	•	•	•	•
	Stacking type/DIN rail mounted Plug-in EX510 gateway type	SY3□40 SY5□40	_	_	_	_	_	_	•	_	_

Standard ○ Option ▲ Made to order (Refer to page "Made to Order".)
Note) When there are polarities, the positive common specifications are used.

		Ma	anifo	old	opti	ion							A	, B	por	t siz	<u>z</u> e									Va	lve	opt	ion				
Blanking plate	Individual SUP spacer	Individual EXH spacer	SUP block disk	EXH block disk	Label for block disk	Silencer for One-touch fitting	Built-in silencer	Connector	M5	1/8	1/4	3/8			On	e-to	ouch	n fitt	ting			ixed mounting	8548 3 Port valve/Mixed	sistant (Other than ated turbine oil)	Vacuum specifications	Low pressure specifications	Different pressure	Dual pressure	Exhaust throttle	Bundle wiring	Mixed fitting sizes	IP65 enclosure	Interface regulator
Blan	Individ	Individ	ans	EXH	Labe	Silence	Built	Con					C4	C6	C8	C10	C12	N3	N7	N9	N11	SY3000 SY5000	ຕ∈ SY300 SY500	Oil res design	Vacu	Low pre	Diffe	Dua	Exh	Bun	Mixe	5941	Inter
			_		_	_	_	_	•	_	_	_	•		_	_	_	•	•	_	_		•		_	_	Individual	_	_			Note)	
									_		_	_	_			_	_	_			_						Individual SUP interface					Note)	
			_	_	_	_	_	_		_	_	_			_	_	_			_	-	_			_	_	Individual	_	_		_	_	
									_	•	_	_	_	•		_	_	_	•		_		•				SUP interface					Note)	
									_		_				_	_	_		•	_	_											Note)	
			_	_	_	_	_	_	_	_		_	_			_	_	_			_	_			External pilot	External pilot	Individual SUP	External pilot	_	_	_	Note)	
										_		_	_	_			_	_	_				_		pilot	риог	interface	риот					
											_				_							_											
						_																			External pilot	External pilot	SUP	External pilot					
																											interface					Matel	
							P.500	_	_	_	•	•	_	_	•	•	•	_	_	•	•	_	_	•	External pilot	External pilot	Individual SUP block disk	External pilot	Individual EXH	_	•	Note)	
•						•	P.514	_	_	_	•	•	_	_	•	•	•	_	_	•	•	_	_	•	External pilot	External pilot	Individual SUP block disk	External pilot	Individual EXH		•	_	
							F.314		_	•	_	_	•	•	_	_	_	•	•	_	_		•		pilot	pilot		pilot	LAII				
			_	_	_	_	_		_	_		_	_	•		_	_	_		•	_	-	•						_	_	_	_	
									_	_	•	_	_	_	_	•	_	_	_	_	•		_		External pilot	External pilot	Individual SUP	External pilot					
							_		_	_	•	•		_	•	•	•	_	_	•	•	_	_	A		External	Individual		Individual		•		_
									_	_	_	_	•	•	_	_	_	•	•	_	_		•		pilot	pilot	SUP	pilot	EXH			Note)	
								-	_	_	_	_	•	•	•	_	_	•	•	•	_		•		External pilot	External pilot	Individual SUP spacer or block disk	_	_	_		Note)	
									_	_	_	_	•	•	_	_	_	•	•	_	_		•				Individual						
								_	_	_	_	_		•		_	_	•			_		•		External pilot	External pilot	Individual SUP spacer or block disk	_					
									_	_	_	_			_	_	_			_	_		•				Individual						
				_					_	_	_	_				_	_				_				External pilot	External pilot	SUP						
		•			•		•			_		_			_	_	_			_	_			•	•	•	Individual						
																									External pilot	External pilot	SUP						
								_	_	_	_	_			_	_	_			_	_	_	•	•			Individual SUP						$ _ $
							M8 c		_	_	_	_				_	_				-				pilot	External pilot				•			

Note) When using DIN terminal or M8 connector. SY3000 does not have a DIN terminal which can be connected to a manifold.

INDEX

Cylinder Speed Cha	rtFont m	atter 1
Valve Variations	Font m	atter 2
Manifold Variations	Font m	atter 3
	5 Port Solenoid Valve	
3Single Unit		
	Body Ported ·····	····· P.1
	Base Mounted ·····	··· P.19
Body Ported		
	Type 20 Bar Stock Type/Individual Wiring	
	Type 20P Bar Stock Type/Flat Ribbon Cable	P.47
	Type 23P Stacking Type/Flat Ribbon Cable	P.53
	Type 20SA Bar Stock Type/EX510 Gateway-type	P.55-1
	Type 23SA Stacking Type/EX510 Gateway-type	P.55-7
	Type 60 Cassette Type/Individual Wiring	P.59

Base Mounted Manifold


Type 41 Bar Stock Type/Compact Type/Individ	lual Wiring ····· P.79
Type 42 Bar Stock Type/External Pilot Capable	e/Individual Wiring ····· P.79
Type 43 Stacking Type/Individual Wiring	P.89
Type 41P Bar Stock Type/Compact Type/Flat R	ibbon Cable P.95
Type 42P Bar Stock Type/External Pilot Capable	e/Flat Ribbon Cable····· P.95
Type 43P Stacking Type/Flat Ribbon Cable	P.103
Type 42SA Bar Stock Type/EX510 Gateway-type	P.108-1
Type 43SA Stacking Type/EX510 Gateway-type	P.108-6
Type 45 Stacking Type/ DIN Rail Mounted Indiv	ridual Wiring ····· P.115
Type 45- Stacking Type/ DIN Rail Mounted Con	nector Box ····· P.127
Type 45S6A Stacking Type/ DIN Rail Mounted EX5	10 Gateway-type ····· P.134-
Type 45□ Stacking Type/ DIN Rail Mounted Plug	-in P.135
Type 45S6B Stacking Type/ DIN Rail Mounted EX5	10 Gateway-type ····· P.176-
Manifold Option ·····	P.176-6
SY300/500 3 Port Valve: Mixed Mounting Type on Manifold	
Made to Order External Pilot/Built-in Silencer ·······	B 203
Mixed Mounting Type	
M8 Connector Conforming to IEC60947-5-2 ······	P.211
Body Ported Vacuum Release Valve with Throttle Valve	
Body Ported External Pilot/Fluororubber for Main Valve	
Body Ported/Base Mounted 4-Position Dual 3-Port Valve Pilot Valve Assembly/Port Block Assembly	P.217-1
Conforming to UL standard	F.210
30-SY3000/5000/7000/9000: 5 Port Solenoid Valve Body Ported/Single Unit ·······	P.219
30-SY3000/5000/7000/9000: 5 Port Solenoid Valve Base Mounted/Single Unit ···	P.220
30-SY300/500: 3 Port Solenoid Valve Body Ported/Single Unit	
30-SY300/500: 3 Port Solenoid Valve Base Mounted/Single Unit	P.222



5 Port Solenoid Valve Series SY3000/5000/7000/9000 **Body Ported** Single Unit



How to Order

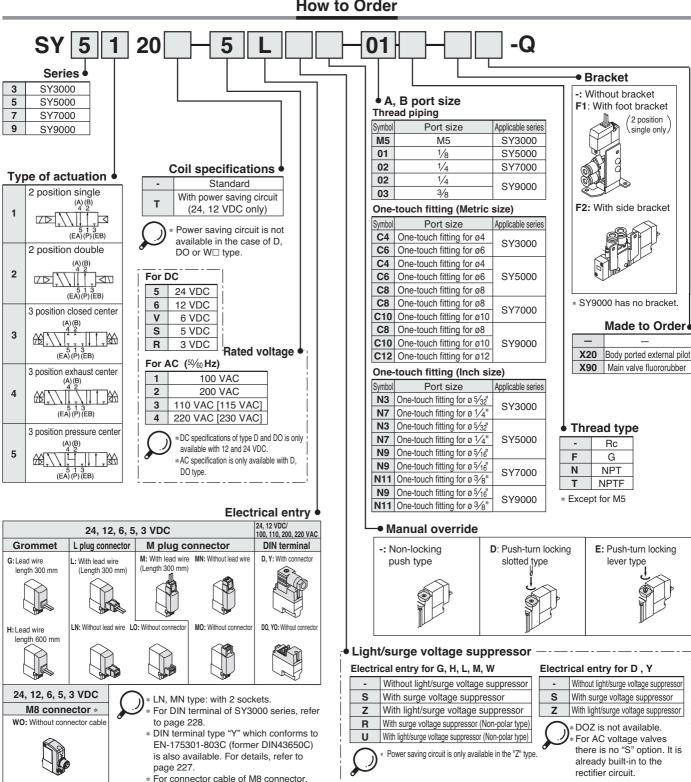

)Note) When placing an order for body ported solenoid valve as a single unit, mounting bolt for manifold and gasket are not attached. Order them separately, if necessary. (For details, refer to page 56.)



refer to page 230.

* Connector M8 type "WA" conforming to

Note 1) Enter the cable length symbols in

□. Please be sure to fill in the blank referring to page 231.

IEC 60947-5-2 standard, is also available. For details, see page 211.

Specifications



Series		SY3000	SY5000	SY7000	SY9000				
Fluid		Air							
Internal pilot	2 position single		0.15	to 0.7					
Operating pressure	2 position double		0.1 t	o 0.7					
range (MPa)	3 position		0.2 t	o 0.7					
Ambient and fluid ter	mperature (°C)		-10 to 50 (I	No freezing)					
Max. operating	2 Position single, Double	10 5 5							
frequency (Hz)	3 position	3 3 3							
Manual override (Ma	anual operation)	Push-turn lock	Non-locking ing slotted type		king lever type				
Pilot exhaust method	d	Common	exhaust type	for main and	pilot valve				
Lubrication			Not re	quired					
Mounting orientation		Unrestricted							
Impact/Vibration resi	istance (m/s²) Note)	150/30							
Enclosure		Dust proof (* DIN termina	l and M8 con	nector: IP65)				



Based on IEC60529)

Note) Impact resistance: No malfunction occurred when it is tested in the axial direction and at the right angles to the main valve and armature in both energised and de-energised states every once for each condition. (Values at the initial

Vibration resistance:

No malfunction occurred in a one-sweep test between 45 and 2000 Hz. Test was performed at both energised and de-energised states in the axial direction and at the right angles to the main valve and armature. (Values at the initial period)



Solenoid Specifications

			Grommet (G), (H)	DIN terminal (D)			
Electrical costs			L plug connector (L)	M8 connector (W)			
Electrical entry			M plug connector (M)	` ,			
			G, H, L, M, W	D			
Coil rated		DC	24, 12, 6, 5, 3	24, 12			
voltage (V)		AC ⁵⁰ / ₆₀ Hz	100, 110	200, 220			
Allowable voltage	fluctua		10% of rate	ed voltage *			
Power	DC	Standard	0.35 (With indicator light: 0.4 DIN	terminal with indicator light: 0.45)			
consumption (W)	DC	With power saving circuit	0.1 (With ir	dicator light only)			
		100 V	-	0.78 (With indicator light: 0.87)			
		110 V	-	0.86 (With indicator light: 0.97)			
Apparent power		[115 V]	-	[0.94 (With indicator light: 1.07)]			
(VA) *	AC	200 V	-	1.15 (With indicator light: 1.30)			
		220 V	-	1.27 (With indicator light: 1.46)			
		[230 V]	- [1.39 (With indicator light: 1.				
Surge voltage sup	presso	or	Diode (Varistor is for DIN terminal and Non-polar ty				
Indicator light			LED (AC of DIN connector is neon light.)				



- In common between 110 VAC and 115 VAC, and between 220 VAC and 230 VAC.
 For 115 VAC and 230 VAC, the allowable voltage is –15% to +5% of rated voltage.
 S, Z and T type (with power saving circuit) should be used within the following allowable voltage fluctuation range due to a voltage drop caused by the internal circuit.
 S and Z type: 24 VDC: –7% to +10%
 12 VDC: –4% to +10%

T type: 24 VDC: -8% to +10% 12 VDC: -6% to +10%

Response Time



Note) Based on dynamic performance test, JIS B 8375-1981. (Coil temperature: 20C, at rated voltage, without surge suppressor)

SY3000

	Response time (r	ns) (at the pressu	re of 0.5 MPa)						
Type of	Without light/surge	Without light/surge With light/surge voltage su							
actuation	voltage suppressor	Type S, Z	Type R, U						
2 position single	12 or less	15 or less	12 or less						
2 position double	10 or less	13 or less	10 or less						
3 position	15 or less	20 or less	16 or less						

SY5000

	Response time (r	ns) (at the pressu	re of 0.5 MPa)							
Type of	Without light/surge	Without light/surge With light/surge voltage su								
actuation	voltage suppressor	Type S, Z	Type R, U							
2 position single	19 or less	26 or less	19 or less							
2 position double	18 or less	22 or less	18 or less							
3 position	32 or less	38 or less	32 or less							

SY7000

	Response time (r	ns) (at the pressu	re of 0.5 MPa)
Type of	Without light/surge	oltage suppressor	
actuation	voltage suppressor	Type S, Z	Type R, U
2 position single	31 or less	38 or less	33 or less
2 position double	27 or less	30 or less	28 or less
3 position	50 or less	56 or less	50 or less

SY9000

	Response time (r	ns) (at the pressu	re of 0.5 MPa)							
Type of	Without light/surge	Without light/surge With light/surge voltage su								
actuation	voltage suppressor	Type S, Z	Type R, U							
2 position single	35 or less	41 or less	35 or less							
2 position double	35 or less	41 or less	35 or less							
3 position	62 or less	64 or less	62 or less							



Flow Characteristics/Weight

Series SY3000


			Por	t size				Flow char	acter	istics	3		We	eight	(g)
Valve		e of	1, 5, 3	4, 2		1→4/	2 (P→	A/B)		4/2→5	/3 (A/B-	→EA/EB)	Gro-	L/M	W
model	actu	ation		(A, B)	C (kdm³/ (s-bar))	b	Cv	Q[d/min(ANR)]	C (kdm³/ (s·bar))	b	Cv	Q[t/min(ANR)]		plug connector	M8 connector
	2 position	Single Double			0.61	0.44	0.16	171	0.64	0.45	0.18	181	51 68	53 74	57 82
SY3□20		Closed center			0.48	0.46	0.13	137	0.47	0.43	0.13	131			
-□-M5	3 position	Exhaust center		M5 x 0.8	0.47	0.42	0.13	130	0.47 (0.44)	0.41 (0.37)	0.13 (0.12)	129 (117)	71	76	84
		Pressure center			0.50 (0.41)	0.48 (0.35)	0.15 (0.11)	145 (108)	0.47	0.43	0.13	131			
	2	Single			0.72	0.00	0.10	182	0.64	0.34	0.17	167	60	63	67
	position	Double			0.72	0.29	0.18	182 0.64	0.04	0.17	167	78	83	91	
SY3□20		Closed center	ME O O	C4 / One- \	0.59	0.28	0.15	148	0.59	0.30	0.15	150			
-□-C4	3 position	Exhaust center	M5 x 0.8	touch fitting for ø4	0.63	0.35	0.16	166	0.42 (0.41)	0.34 (0.37)	0.11 (0.11)	110 (109)	81	86	94
		Pressure center		(101 104 /	0.76 (0.46)	0.42 (0.34)	0.21 (0.12)	210 (120)	0.59	0.29	0.15	149			
	2	Single			0.70	0.00	0.10	193	0.05	0.00	0.17	170	56	59	63
	position	Double			0.76	0.30	0.19	193	0.65	0.39	0.17	176	74	79	87
SY3□20		Closed center		C6 / One- \	0.76	0.55	0.24	233	0.60	0.33	0.16	156			
-□-C6	3 position	Exhaust center		touch fitting	0.65	0.32	0.16	167	0.64 (0.42)	0.31 (0.36)	0.17 (0.11)	164 (111)	77	82	90
		Pressure center		\ forø6 /	0.77 (0.49)	0.34 (0.43)	0.21 (0.15)	201 (136)	0.61	0.34	0.16	159			



Note) (): denotes normal position.

Series SY5000

			Por	t size				Flow char	acter	istics	;			Weig	ht (g)
Valve		e of	1, 5, 3	4, 2		1→4	/2 (P-	→A/B)		4/2→5	/3 (A/B-	EA/EB)	Gro-	L/M	DIN	W
model	actu	ation	(P, EA, EB)	(A, B)	C (dm³/ (s-bar))	b	Cv	Q[d/min(ANR)]	C (dm³/ (s·bar))	b	Cv	Q[d/min(ANR)]	mmot	plug connector	DIN terminal	M8 connector
	2 Single position Double			1.9	0.35	0.49	499	2.4	0.39	0.61	648	70 88	72 93	93 135	76 101	
SY5□20		Closed center		1/	1.7	0.43	0.45	473	1.8	0.35	0.46	473				
-□-01	3 position	Exhaust center		1/8	1.5	0.44	0.41	420	2.5 (1.5)	0.32 (0.43)	0.59 (0.40)	644 (417)	93	98	140	106
		Pressure center			2.2 (0.91)	0.46 (0.58)	0.61 (0.28)	626 (287)	1.8	0.38	0.46	483				
	2	Single			0.75	0.43	0.20	209	0.85	0.64	0.30	285	94	96	117	100
	position	Double			0.70	0.10	0.20		0.00	0.01	0.00		111	117	159	125
SY5□20		Closed center		C4 / One- \	0.74	0.40	0.19	201	0.84	0.57	0.28	263				
-□-C4	3 position			touch fitting	0.75	0.36	0.19	198	0.84 (0.84)	0.64 (0.53)	0.30 (0.27)	281 (253)	117	122	164	130
		Pressure center	1/8	(101047	0.78 (0.71)	0.44 (0.37)	0.21 (0.18)	219 (189)	0.84	0.57	0.27	263				
	2 position	Single Double	' "		1.5	0.33	0.33	389	2.0	0.37	0.52	533	88 106	91 111	112 153	95 119
SY5□20		Closed center		C6 / One- \	1.3	0.31	0.33	333	1.6	0.32	0.39	412				
-□-C6	3 position	Exhaust center		touch fitting	1.3	0.33	0.33	337	1.8 (1.4)	0.35 (0.37)	0.44 (0.35)	473 (373)	111	116	158	124
		Pressure center		(101.00)	1.7 (0.80)	0.31 (0.47)	0.42 (0.23)	435 (229)	1.7	0.33	0.44	441				
	2 position	Single Double			1.9	0.21	0.45	458	2.3	0.29	0.57	581	80 98	82 103	103 145	86 111
SY5□20		Closed	•	C8	1.6	0.29	0.39	404	1.7	0.38	0.46	456	30	100	170	
-□-C8	3 position	Exhaust center		/ One- \- touch fitting)	1.4	0.38	0.39	375	2.0 (1.5)	0.37 (0.41)	0.52 (0.43)	533 (411)	103	108	150	116
		Pressure center		\ for ø8 /	2.2 (1.6)	0.32 (0.44)	0.56 (0.44)	567 (448)	1.8	0.41	0.50	493				



^{*} These values have been calculated according to ISO6358 and represent the flow rate measured in standard conditions at an upstream pressure of 0.6 MPa (relative pressure) and a differential pressure of 0.1MPa.



^{*} These values have been calculated according to ISO6358 and represent the flow rate measured in standard conditions at an upstream pressure of 0.6 MPa (relative pressure) and a differential pressure of 0.1MPa.

Series SY7000

			Por	t size				Flow char	acter	istics	3			Weig	ht (g)	
Valve	Тур	e of	1, 5, 3	4, 2		1→4	/2 (P-	→A/B)		4/2→	5/3 (A/B-	→EA/EB)	Gro-	L/M	DIN	W
model	actu		1, 5, 3 4, 2 (P, EA, EB) (A, B)		C (dm ³ / (s-bar))	b	Cv	Q[d/min(ANR)]	C (dm³/ (s·bar))	b	Cv	Q[d/min(ANR)]	mmet	plug connector	DIN terminal	M8 connector
	2 position	Single Double			4.1	0.23	0.93	999	3.3	0.33	0.81	855	101 120	104 125	125 167	108 133
SY7□20		Closed center		1/4	2.9	0.31	0.70	742	2.4	0.38	0.63	644				
-□-02	3 position	Exhaust center		'/4	2.5	0.39	0.65	675	3.4 (2.1)	0.35 (0.38)	0.82 (0.54)	893 (563)	128	133	175	141
		Pressure center			4.3 (2.4)	0.23 (0.32)	0.97 (0.61)	1048 (618)	2.2	0.39	0.58	594				
	2	Single	1 (P)		3.2	0.26	0.77	794	3.2	0.37	0.82	852	107	110	131	114
	position	Double	Port		5.2	0.20	0.77	704	0.2	0.57	0.02	002	126	132	174	140
SY7□20		Closed center	1/4	C8 / One- \	2.6	0.24	0.63	637	2.4	0.31	0.62	614				
-□-C8	3 position	Exhaust center	5, 3 (EA, EB)	touch fitting for ø8	2.4	0.25	0.57	592	2.6 (1.9)	0.42 (0.46)	0.70 (0.56)	718 (541)	134	140	182	148
		Pressure center	port 1/8	(101 00)	3.3 (2.4)	0.28 (0.22)	0.78 (0.57)	829 (581)	2.2	0.34	0.60	574				
	2	Single			3.8	0.26	0.86	943	3.2	0.34	0.82	835	103	105	126	109
	position	Double			5.0	0.20	0.00	010	0.2	0.54	0.02	000	122	127	169	135
SY7□20		Closed center		C10 / One- \	2.8	0.27	0.67	699	2.4	0.21	0.59	578				
-□-C10	3 position	Exhaust center		touch fitting	2.5	0.25	0.59	616	2.7 (2.0)	0.38 (0.38)	0.70 (0.56)	724 (536)	130	135	177	143
		Pressure center		(101 00 10 /	3.8 (2.4)	0.25 (0.31)	0.89 (0.61)	937 (614)	2.3	0.38	0.61	617				



Note) (): denotes normal position.

Series SY9000

			Por	t size				Flow char	acter	istics	3			Weig	ht (g)	
Valve	Тур	e of				1→4/	2 (P-					→EA/EB)	Gro-	L/M		W
model	actu		(P, EA, EB)	4, 2 (A, B)	C (dm ³ / (s-bar))	b	Cv	Q[d/min(ANR)]	C (dm ³ / (s·bar))	b	Cv	Q[d/min(ANR)]	mmet	plug connector	DIN terminal	M8 connector
	2 position	Single Double			7.0	0.33	1.7	1815	7.6	0.35	2.0	1997	241 260	244 266	265 308	248 274
SY9□20		Closed center		1/4	6.7	0.37	1.7	1784	6.4	0.34	1.6	1670				
-□-02	3 position	Exhaust center		'/4	6.4	0.36	1.6	1693	8.3 (4.1)	0.41 (0.27)	2.2 (0.91)	2274 (1023)	284	290	332	298
		Pressure center			8.0 (3.2)	0.27 (0.34)	1.8 (0.76)	1997 (835)	6.5	0.22	1.4	1575				
	2 position	Single Double			8.0	0.29	1.9	2021	8.0	0.33	2.0	2074	236 255	239 261	260 303	243 269
SY9□20		Closed center		٥,	7.9	0.33	1.9	2048	6.6	0.27	1.6	1647				
-□-03	3 position	Exhaust center		3/8	8.0	0.33	1.9	2074	8.7 (8.3)	0.34 (0.40)	2.2 (2.3)	2270 (2258)	279	285	327	293
		Pressure center			8.9 (3.3)	0.34 (0.40)	2.2 (0.82)	2323 (898)	6.5	0.25	1.5	1603				
	2 position	Single Double			4.3	0.28	0.96	1080	7.1	0.32	1.7	1829	293 312	296 318	317 360	300 326
SY9□20		Closed center	1/4	C8 / One- \	4.3	0.31	0.99	1100	6.1	0.28	1.4	1532				
-□-C8	3 position	Exhaust center	'/4	touch fitting for ø8	4.3	0.3	0.99	1093	7.4 (3.8)	0.36 (0.29)	1.9 (0.86)	1957 (960)	336	342	384	350
		Pressure center		(101 50)	4.4 (3.2)	0.35 (0.26)	1.0 (0.71)	1156 (794)	2.1	0.41	0.53	575				
	2 position	Single Double			6.1	0.28	1.4	1532	7.9	0.33	1.9	2048	279 298	282 304	303 346	286 312
SY9□20		Closed center		C10 / One- \	5.9	0.30	1.4	1500	6.5	0.26	1.5	1612				
-□-C10	3 position	Exhaust center		touch fitting	5.8	0.25	1.3	1430	8.4 (4.1)	0.33 (0.27)	2.0 (0.93)	2178 (1023)	322	328	370	336
		Pressure center		(101010)	6.3 (3.2)	0.29 (0.29)	1.5 (0.72)	1592 (809)	6.4	0.25	1.5	1578				
	2 position	Single Double			7.0	0.25	1.6	1726	8.6	0.41	2.2	2356	265 284	268 290	289 332	272 298
SY9□20		Closed center		C12	6.9	0.24	1.6	1691	7.0	0.33	1.7	1815				
-□-C12	3 position	Exhaust center		One- touch fitting for ø 12	6.6	0.23	1.4	1608	9.4 (4.5)	0.48 (0.32)	2.6 (1.0)	2718 (1159)	308	314	356	322
розноп	Pressure center		(.01.012/	7.4 (3.2)	0.25 (0.34)	1.7 (0.74)	1825 (835)	6.6	0.23	1.5	1608					



Note) (): denotes normal position.

^{*} These values have been calculated according to ISO6358 and represent the flow rate measured in standard conditions at an upstream pressure of 0.6 MPa (relative pressure) and a differential pressure of 0.1MPa.




^{*} These values have been calculated according to ISO6358 and represent the flow rate measured in standard conditions at an upstream pressure of 0.6 MPa (relative pressure) and a differential pressure of 0.1MPa.


Construction

Series SY


JIS Symbol 2 position single (A)(B) 5 1 3 (EA)(P)(EB)

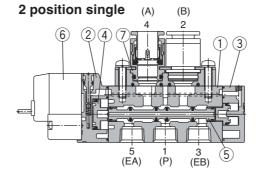



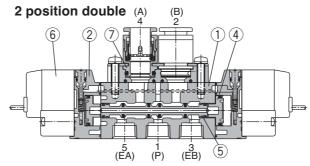


Symbol 3 position closed center




3 position exhaust center



3 position pressure center



3 position closed center / exhaust center / pressure center

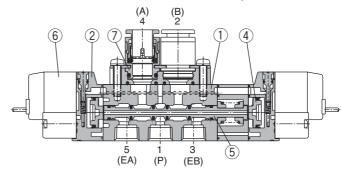

(This figure shows a closed center type.)

Component Parts

No.	Description	Material	Note
1	Body	Aluminum die-casted (SY3000: Zinc die-casted)	White
2	Adapter plate	Resin	White (SY9000: Gray)
3	End plate	Resin	White
4	Piston	Resin	_
5	Spool valve assembly	Aluminum, HNBR	-

Replacement Parts

No.	Description	No.
6	Pilot valve assembly	Refer to "How to Order Pilot Valve Assembly" on page 218.
7	M5 port block assembly	Refer to "How to Order Port Block Assembly" on page 218.


Bracket Assembly No.

Description	No.
Bracket (For F1)	SX ₅ ³ 000-16-2A (with mounting screw)
Bracket (For F2)	SX ₇ ³ 000-16-1A (with mounting screw)

^{*} SY9000 has no bracket.

How to Change Port Block Assembly

If using body port type, both A and B port sizes can be changed by replacing the port block assembly mounted on the body. When changing this block assembly, the correct screw torque must be achieved to avoid possible air

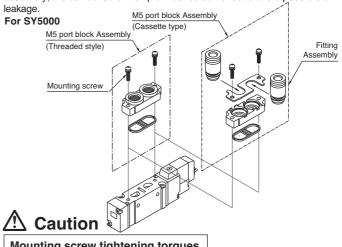


Mounting screw tightening torques


SY3000 (M2): 0.12 N·m SY 5000 (M3): 0.6 N·m SY9000 (M4): 1.4 N·m




Dimensions: Series SY3000

2 position single Grommet (G), (H): SY3120-□H □□-C4, N3(-F2)-Q 2- ø1.5 die-cast hole M5 (P, EA, EB port) For manifold gasket positioning (35)(3.2)2-ø3.2 (27)(Light/surge voltage suppressor) (For mounting) 33.6 37.4 (35.5)(32)18.5 25 16.9 C6: 28.5 22.5 **G:** Approx. 300 66.9 H: Approx. 600 (Lead wire length) 44.7 8.6 Manual override One-touch fitting 21.4 2- ø2.2 (For manifold mounting) (A, B port) Applicable tubing O.D.: ø4, ø5/32 ø6, ø1/4" 2-M3 depth 3.5 (For mounting bracket)

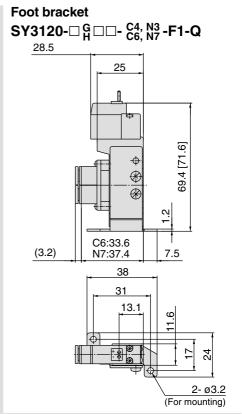





L plug connector (L): SY3120- \square L \square - $\overset{\text{C4, N3}}{\text{C6, N7}}$ (-F $_2^1$)-Q

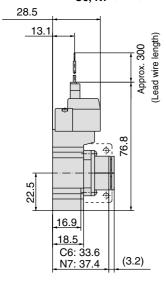

M plug connector (M): SY3120- \square M \square - $^{C4}_{C6, N7}$ (- F_2^1) -Q

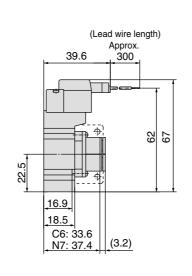



M8 connector (WO): SY3120- \square WO \square -C₆, N₇(-F₂)-Q

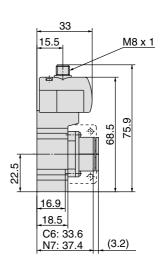



Note) Refer to back page 12 for dimensions of connector types.

Dimensions: Series SY3000

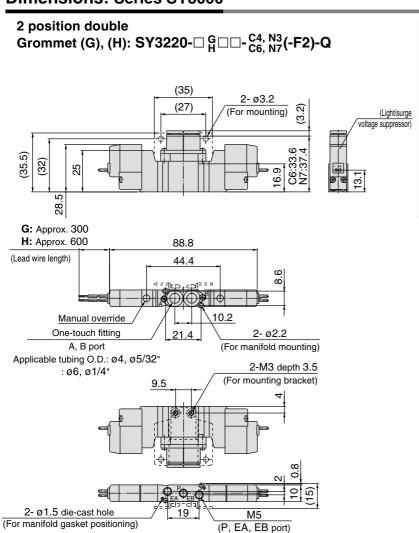

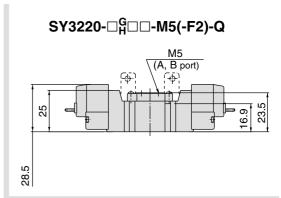

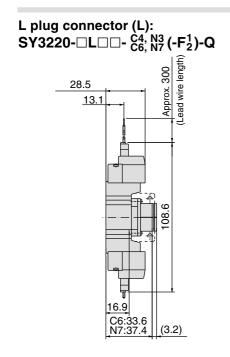

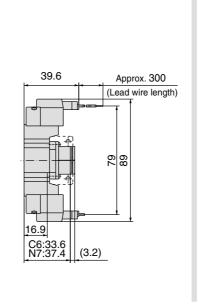

M plug connector (M): SY3220- \square M \square - $\overset{C4}{C6}$, $\overset{N3}{N7}$ (- $\overset{1}{F_2}$) -Q

M8 connector (WO): SY3220-WO□□-C4, N3 C6, N7(-F2)-Q

Note) Refer to back page 12 for dimensions of connector types.


(3.2)

16.9

C6:33.6 N7:37.4





Dimensions: Series SY3000

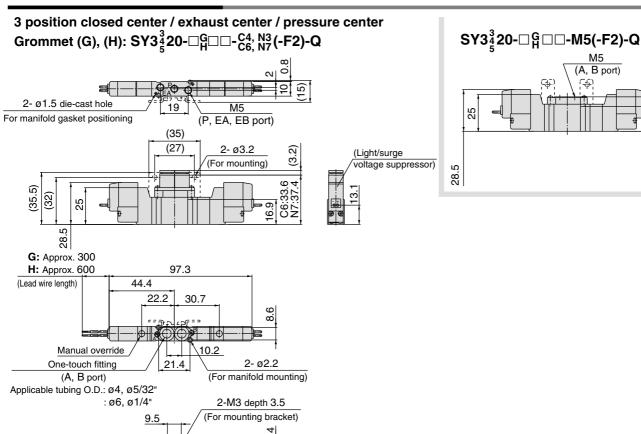


M plug connector (M):

SY3³/₅20-□M□□-C⁴/_{C6}, N₇(-F2)-Q

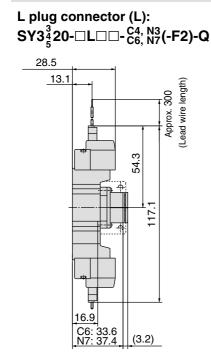

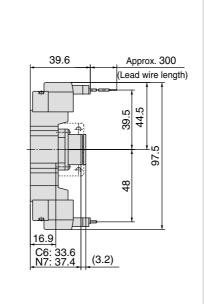


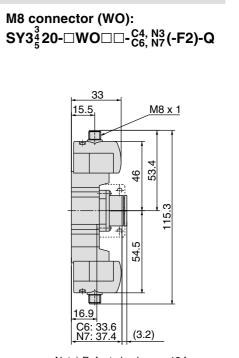

23.


Note) Refer to back page 12 for dimensions of connector types.


Dimensions: Series SY5000

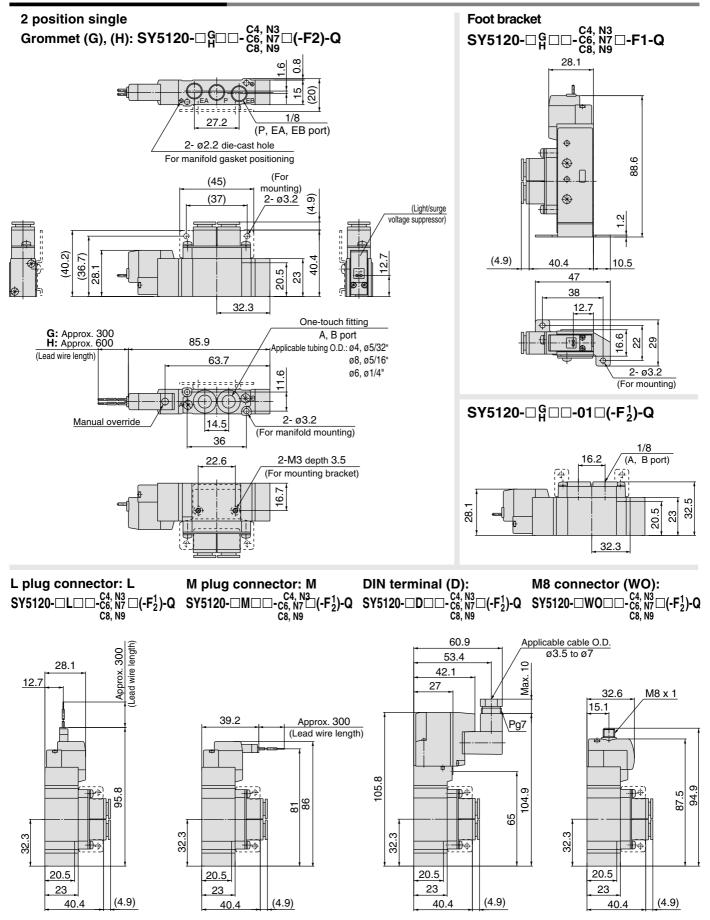

Note) Refer to back page 12 for

Dimensions: Series SY5000

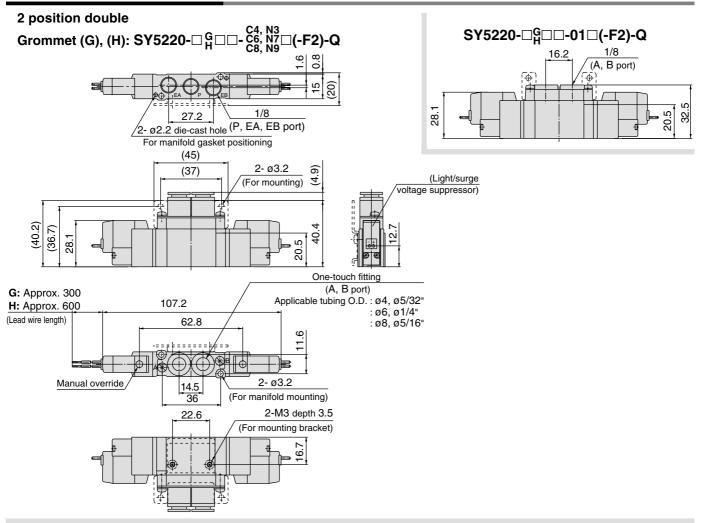






 M plug connector (M):
 DIN terminal (D):
 M8 connector (WO):


 SY5220-□M□□-c6, N7□(-F2)-Q
 SY5220-□D□□-c6, N7□(-F2)-Q
 SY5220-□WO□-c6, N7□(-F2)-Q


ø3.5 to ø7

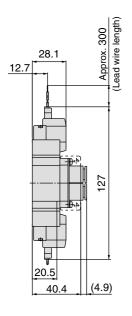


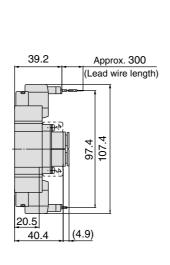


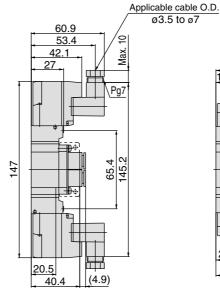


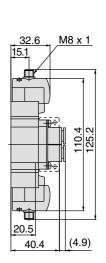

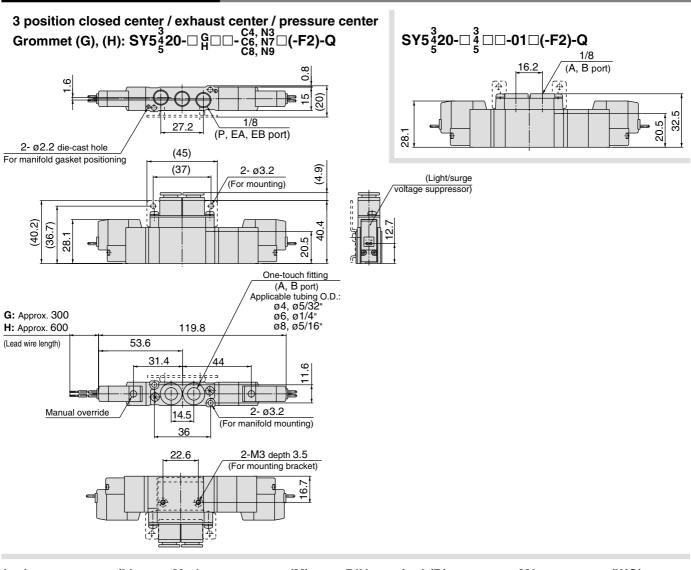





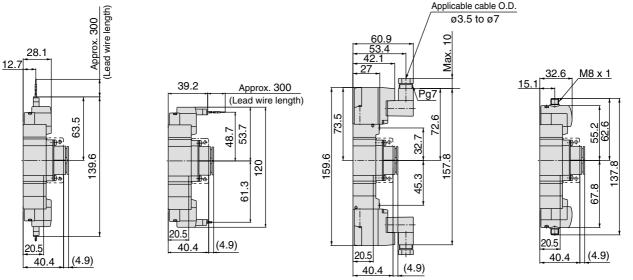



Dimensions: Series SY7000

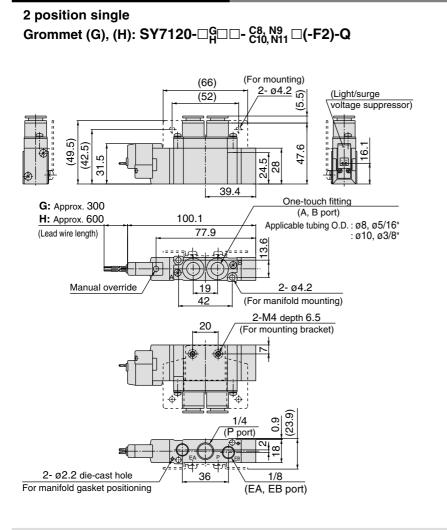

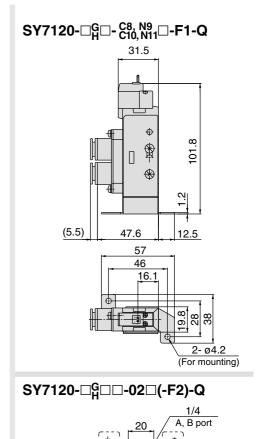


.5 [38.


M8 connector (WO): SY7120- \square WO \square - \square - \square 0,N11 \square (- \square 1,Q-Q


39.4


24.5 4


28

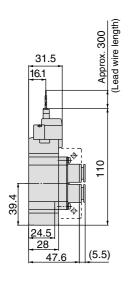





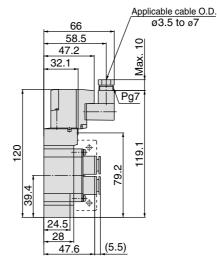





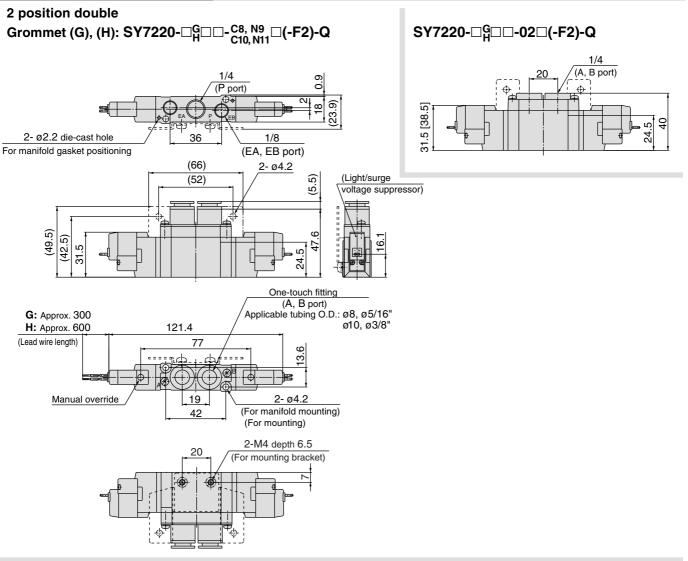

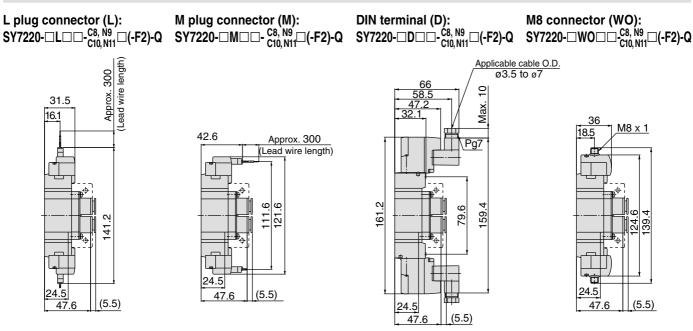


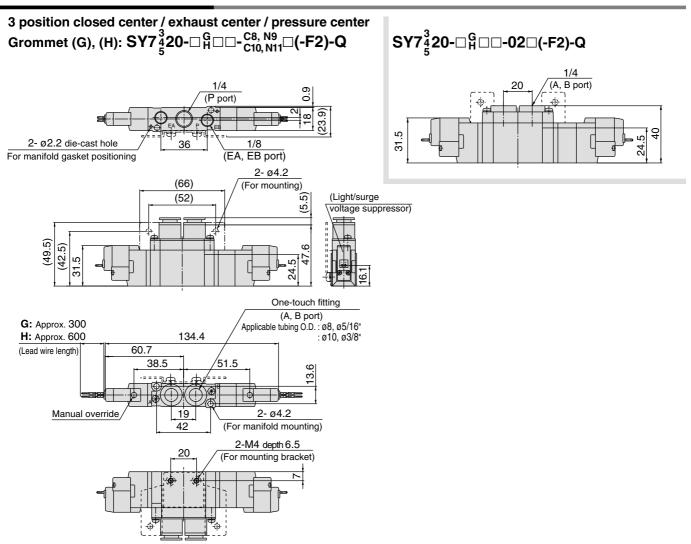




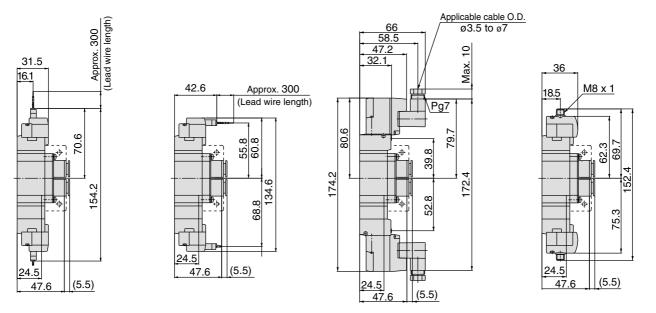




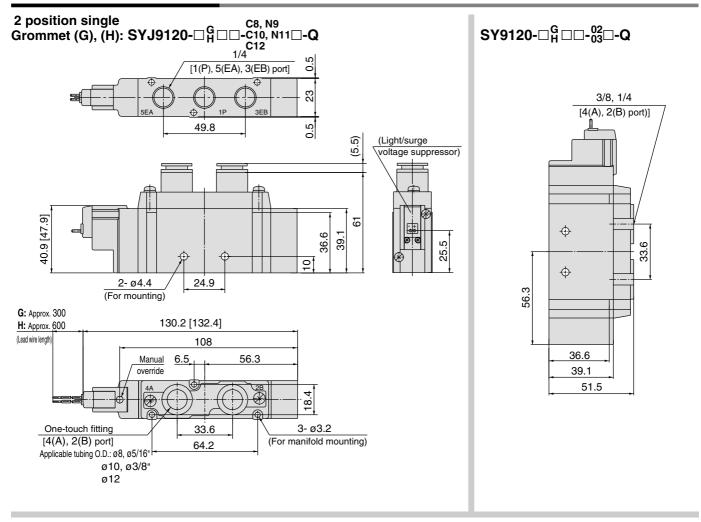

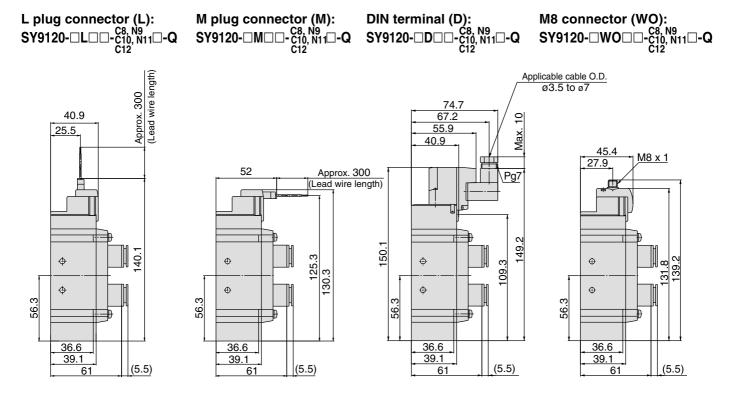


Dimensions: Series SY9000

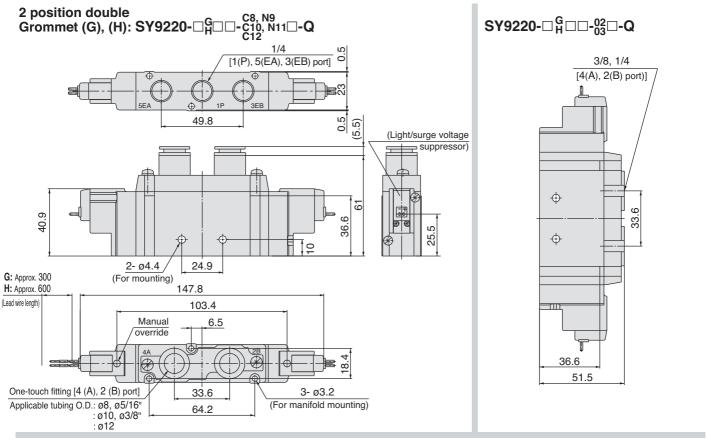


 L plug connector (L):
 M plug connector (M):
 DIN terminal (D):
 M8 connector (S, N9)


 SY9220-□L□□-C10, N11□-Q
 SY9220-□M□□-C10, N11□-Q
 SY9220-□D□□-C10, N11□-Q
 SY9220-□W

M8 connector (WO): SY9220-□WO□□-C10, N11□-Q C12

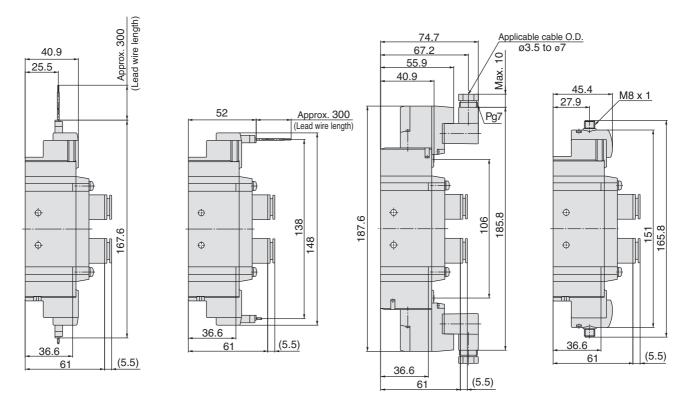

Dimensions: Series SY9000

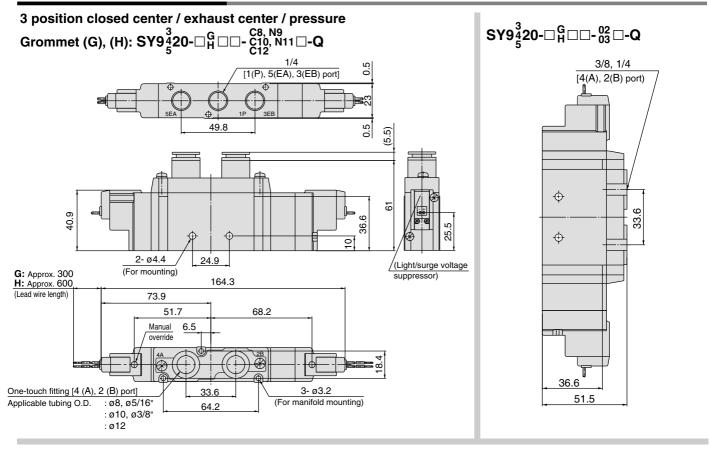



M plug connector (M):

C8, N9

SY94

20-□M□□-c10, N11□-Q

DIN terminal (D):


C8, N9


SY9⁴/₅20-□D□□-c10, N11□-Q


M8 connector (WO):

\$Y9\bigs_{5}^{4}20-□WO□□-\$c10, \$N11□-\$Q\$

\$C12\$

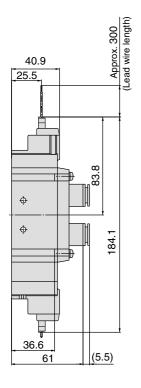

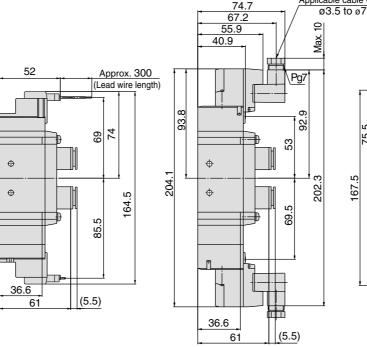


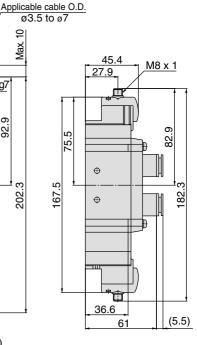

5 Port Solenoid Valve Series SY3000/5000/7000/9000 **Base Mounted** Single Unit



How to Order

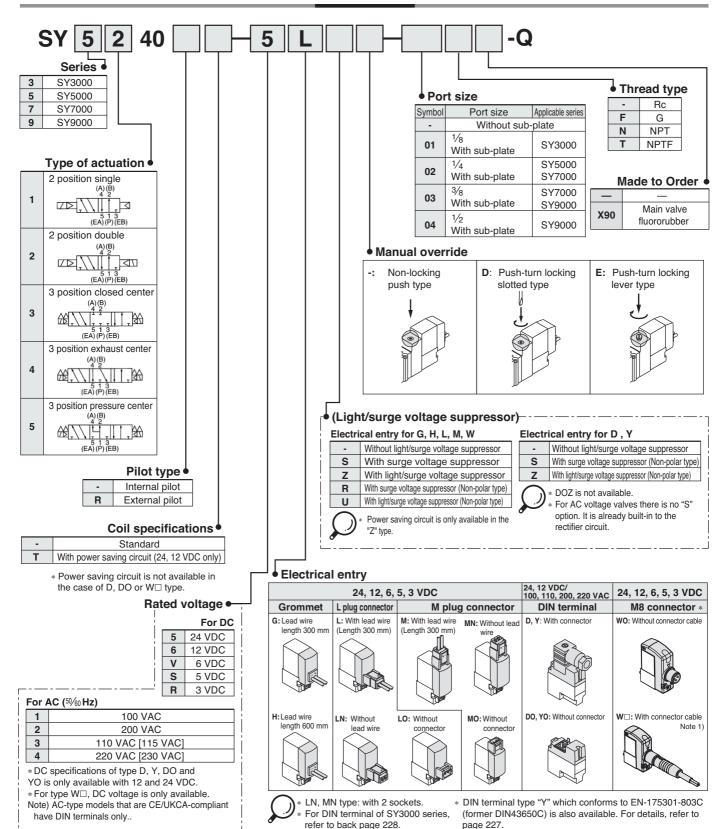




* For connector cable of M8 connector, refer to back page 230.

SY3000/5000/7000/9000 Base Mounted

Specifications





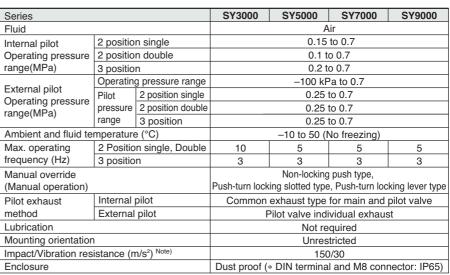

* Based on IEC60529)
Note) Impact resistance

Note) Impact resistance: No malfunction occurred when it is tested in the axial direction and at the right angles to the main valve and armature in both energised and de-energised states every once for each condition. (Values at the initial period)

Vibration resistance: No malfunction occurred in a one-sweep test between 45 and 2000 Hz. Test was performed at both energised and de-energised states in the axial direction and at the right angles to the main valve and armature. (Values at the initial period)

Response Time



Note) Based on dynamic performance test, JIS B 8375-1981. (Coil temperature: 20C, at rated voltage)

SY3000

		onse time (
Type of	(at the pi	essure of 0	.5 MPa)
actuation	Without light/surge	With light/surge vi	oltage suppressor
	voltage suppressor	Type S, Z	Type R, U
2 position single	12 or less	15 or less	12 or less
2 position double	10 or less	13 or less	10 or less
3 position	15 or less	20 or less	16 or less

SY5000

Type of		onse time (ressure of 0	
actuation	Without light/surge	With light/surge v	oltage suppressor
	voltage suppressor	Type S, Z	Type R, U
2 position single	19 or less	26 or less	19 or less
2 position double	18 or less	22 or less	18 or less
3 position	32 or less	38 or less	32 or less

SY7000

Type of		onse time (ressure of 0	
actuation	Without light/surge	With light/surge v	oltage suppressor
	voltage suppressor	Type S, Z	Type R, U
2 position single	31 or less	38 or less	33 or less
2 position double	27 or less	30 or less	28 or less
3 position	50 or less	56 or less	50 or less

SY9000

	Resp	onse time (ms)							
Type of	(at the pressure of 0.5 MPa)									
actuation	Without light/surge	With light/surge v	oltage suppressor							
	voltage suppressor	Type S, Z	Type R, U							
2 position single	35 or less	41 or less	35 or less							
2 position double	35 or less	41 or less	35 or less							
3 position	62 or less	64 or less	62 or less							

Solenoid Specifications

	Electrical entry			Grommet (G), (H) L plug connector (L) M plug connector (M)	DIN terminal (D) M8 connector (W)			
				G, H, L, M, W	D			
	Coil rated		DC	24, 12, 6, 5, 3	24, 12			
	voltage (V)		AC 50/60 Hz	100, 110	200, 220			
	Allowable voltage t	fluctua	tion (%)	10% of rate	ed voltage *			
	Power	DC	Standard	0.35 (With indicator light: 0.4 DIN	terminal with indicator light: 0.45)			
	consumption (W)	DC	With power saving circuit	0.1 (With in	dicator light only)			
			100 V	-	0.78 (With indicator light: 0.87)			
			110 V	-	0.86 (With indicator light: 0.97)			
	Apparent power	AC	[115 V]	-	[0.94 (With indicator light: 1.07)]			
(V	(A) *	AC	200 V	-	1.15 (With indicator light: 1.30)			
			220 V	-	1.27 (With indicator light: 1.46)			
			[230 V]	-	[1.39 (With indicator light: 1.60)]			
	Surge voltage sup	presso	or	Diode (Varistor is for DIN terminal and Non-polar type.)				
	Indicator light			LED (AC of DIN connector is neon light.)				

* In common between 110 VAC and 115 VAC, and between 220 VAC and 230 VAC.

* For 115 VAC and 230 VAC, the allowable voltage is -15% to +5% of rated voltage.

S, Z and T type (with power saving circuit) should be used within the following allowable voltage fluctuation range due to a voltage drop caused by the internal circuit. S and Z type: 24 VDC: -7% to +10%

12 VDC: -4% to +10% T type: 24 VDC: -8% to +10%



Base Mounted

Flow Characteristics/Weight

Series SY3000

	Tv	no of	D 1			Flov		Weight (g) Note 2)						
Valve model	Valve model Type of actuation		Port size	$1 \rightarrow 4/2 \ (P \rightarrow A/B)$			$4/2 \rightarrow 5/3 \text{ (A/B} \rightarrow \text{EA/EB)}$				Grommet	L plug connector,	W	
				C (dm3/(s·bar))	b	Cv	Q[t/min(ANR)]	C (dm3/(s-bar))	b	Cv	Q[e/min(ANR)]	Grommet	M plug connector	M8 connector
	2	Single		1.0	0.30	0.24	254	1.1	0.30	0.26	280	84 [50]	85 [53]	89 [57]
	position	Double		1.0	0.30	0.24	254	1.1	0.30	0.26	200	102 [68]	107 [73]	115 [81]
		Closed center		0.77	0.28	0.18	193	0.85	0.30	0.19	216			
SY3□40-□-01		Exhaust	1/8	0.73	0.31	0.18	187	1.1	0.26	0.24	273			
	3 position	center		0.73	0.31	0.16	107	(0.55)	(0.52)	(0.16)	(164)	104 [69]	109 [74]	117 [82]
		Pressure		1.2	0.24	0.29	294	0.89	0.47	0.24	255			
		center		(0.51)	(0.45)	(0.14)	(144)	0.69	0.47	0.24	200			

Note 1) []: denotes the normal position. Note 2) []: denotes without sub-plate.

* These values have been calculated according to ISO6358 and represent the flow rate measured in standard conditions at an upstream pressure of 0.6 MPa (relative pressure) and a differential pressure of 0.1MPa.

Series SY5000

	Tv	no of	David	Flow characteristics Note 1)								Weight (g) Note 2)			
Valve model	alve model Type of actuation		Port size	$1 \rightarrow 4/2 \ (P \rightarrow A/B)$			4/2 → 5/3 (A/B → EA/EB)			Grommet	L plug connector,	DIN	W		
			Size	C (dm3/(s-bar))	b	Cv	Q[t/min(ANR)]	C (dm3/(s-bar))	b	Cv	Q[t/min(ANR)]	Grommet	M plug connector	DIN terminal	M8 connector
	2	Single		2.4	0.41	0.64	658	2.8	0.29	0.66	707	121 [58]	123 [61]	154 [92]	127 [65]
	position	Double		2.4	0.41	0.04	036	2.0	0.29	0.00	707	139 [76]	144 [81]	186 [123]	152 [89]
		Closed center		1.8	0.47	0.50	516	1.8	0.40	0.47	490				
SY5□40-□-02	_	Exhaust	1/4	1.4	0.55	0.44	430	3.0	0.33	0.72	778				
	3 position	center		1.4	0.55	0.44	430	(1.2)	(0.48)	(0.37)	(347)	144 [82]	150 [87]	192 [129]	158 [95]
pos		Pressure		3.3	0.36	0.85	873	1.8	0.40	0.48	490				
		center		(0.84)	(0.60)	(0.28)	(270)	1.0	0.40	0.46	490				

Note 1) []: denotes the normal position. Note 2) []: denotes without sub-plate.

* These values have been calculated according to ISO6358 and represent the flow rate measured in standard conditions at an upstream pressure of 0.6 MPa (relative pressure) and a differential pressure of 0.1MPa.

Series SY7000

	Tv	no of	Dant			Flov	v charact	eristics ^N	ote 1)				Weight ((g) Note 2)			
Valve model	Ive model Type of actuation		Port size	$1 \rightarrow 4/2 \ (P \rightarrow A/B)$				$4/2 \rightarrow 5/3 \text{ (A/B} \rightarrow \text{EA/EB)}$			Grommet Lplu	L plug connector,	DIM townsing!	W			
	aci	uation	3126	C (dm3/(s-bar))	b	Cv	Q[t/min(ANR)]	C (dm3/(s-bar))	b	Cv	Q[t/min(ANR)]	Gioinnet	M plug connector	Din terminal	W M8 connector		
	2	Single		4.1	0.41	1.1	1123	4.1	0.29	1.0	4000	218 [89]	221 [92]	242 [113]	225 [96]		
	position	Double		4.1	0.41	1.1	1123	4.1	0.29	1.0	1036	237 [108]	242 [113]	284 [155]	250 [121]		
		Closed center		3.0	0.43	0.80	834	2.6	0.41	0.72	712						
SY7□40-□-02	_	Exhaust	1/4	2.6	0.42	0.71	718	4.7	0.35	1.1	1235						
	3 position	center		2.0	0.42	0.71	710	(1.7)	(0.48)	(0.49)	(492)	239 [110]	245 [116]	287 [158]	253 [124]		
		Pressure		5.3	0.39	1.3	1431	2.2	0.49	0.63	641						
		center		(2.3)	(0.49)	(0.65)	(670)	2.2	0.43	0.03	641						
	2	Single			Э	4.9	0.29	1.2	1238	4.5	0.27	1.1	1123	218 [89]	221 [92]	242 [113]	225 [96]
	position	Double		4.9	0.29	1.2	1230	4.5	0.27	1.1	1123	237 [108]	242 [113]	284 [155]	250 [121]		
		Closed center		3.0	0.40	0.80	816	2.6	0.45	0.73	734						
SY7□40-□-03		Exhaust	3/8	2.6	0.42	0.71	718	4.8	0.35	1.1	1261						
	position	center		2.0	0.42	0.71	710	(1.7)	(0.48)	(0.49)	(492)	239 [110]	245 [116]	287 [158]	253 [124]		
		Pressure		5.3	0.31	1.3	1356	56 2.3	0.45	0.66	649						
		center		(2.3)	(0.51)	(0.64)	(682)	2.0	0.40	0.00	049						

Note 1) []: denotes the normal position. Note 2) []: denotes without sub-plate.

* These values have been calculated according to ISO6358 and represent the flow rate measured in standard conditions at an upstream pressure of 0.6 MPa (relative pressure) and a differential pressure of 0.1MPa.

Series SY9000

OCITICS O															
	_	,				Flo	w charac	teristics ^N	lote1)				Weight ((g) Note 2)	
Valve model	Type of actuation		Port	$1 \rightarrow 4/2 \ (P \rightarrow A/B)$			$4/2 \rightarrow 5/3 \text{ (A/B} \rightarrow \text{EA/EB)}$			C	L plug connector,	DIN to make at	W		
	act	uation	size	C (dm3/(s-bar))	b	Cv	Q[e/min(ANR)]	C (dm3/(s-bar))	b	Cv	Q[t/min(ANR)]	Grommet	M plug connector	DIN terminal	W M8 connector
	2	Single		7.9	0.34	2.0	2062	9.6	0.43	2.6	2670	469[172]	472[175]	493[196]	476[179]
	position	Double		7.9	0.34	2.0	2002	9.6	0.43	2.0	2070	488[191]	494[197]	535[239]	502[205]
		Closed center		7.5	0.33	1.8	1944	7.3	0.30	1.7	1856				
SY9□40-□-03		Exhaust	3/8	7.2	0.34	1.7	1879	13	0.23	2.8	3168				
	3 position	center		1.2	0.34	1.7	1079	(4.0)	(0.41)	(0.95)	(1096)	512[215]	518[221]	560[263]	526[229]
	poortion	Pressure		12	0.26	2.8	2977	6.7	0.40	1.9	1823				
		center		(3.3)	(0.41)	(0.84)	(904)	0.7	0.40	1.9	1023				
	2	Single		8.0	0.48	2.2	2313	10	0.29	2.5	2527	448 [172]	453 [175]	472	457[179]
	position	Double		0.0	0.46	2.2	2313	10	0.29	2.5	2321	467 [191]	473 [197]	515	481[205]
		Closed center		7.6	0.32	1.8	1957	7.3	0.32	1.8	1880				
SY9□40-□-04		Exhaust	1/2	7.3	0.42	2.0	2015	13	0.32	3.6	3348				
3 position		center		7.3	0.42	2.0	2015	(4.7)	(0.54)	(1.5)	(1430)	491 [215]	497 [221]	539	505[229]
	position	Pressure		12	0.33	3.3	3111	7.4	0.33	1.9	1918]	' '		•
		center		(3.3)	(0.51)	(0.94)	(978)	7.4	0.33	1.9	1910				

Note 1) []: denotes the normal position. Note 2) []: denotes without sub-plate.

* These values have been calculated according to ISO6358 and represent the flow rate measured in standard conditions at an upstream pressure of 0.6 MPa (relative pressure) and a differential pressure of 0.1MPa.







SY3000/5000/7000/9000 Base Mounted


Construction


Series SY



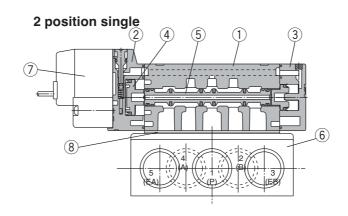




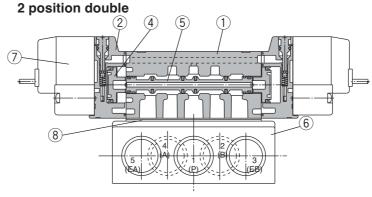






3 position closed center / exhaust center / pressure center



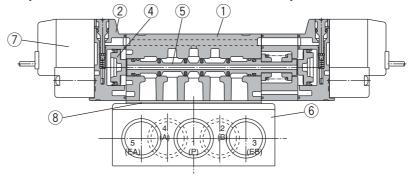

3 position pressure center



(This figure shows a closed center type.)

Component Parts

No.	Description	Material	Note
1	Body	Aluminum die-casted (SY3000: Zinc die-casted)	White
2	Adapter plate	Resin	White (SY9000: Gray)
3	End plate	Resin	White
4	Piston	Resin	_
5	Spool valve assembly	Aluminum, HNBR	_

Replacement Parts

Nia	Description	Part No.				Nete
No.		SY3□40	SY5□40	SY7□40	SY9□40	Note
6	Sub-plate	SY3000-27-1*-Q	SY5000-27-1	¹ / ₄ : SY7000-27-1 * -Q 30 / ₈ 27-2 -Q *	3%: SY9000-27-1 अ-Q 1/2: SY9000-27-2 अ-Q	Aluminum die-casted
7	Pilot valve assembly	Refer to "How to Order Pilot Valve Assembly" on page 218.				
8	Gasket	SY3000-11-25	SY5000-11-15	SY7000-11-11	SY9000-11-2	H-NBR
_	Round head combination screw	SY3000-23-4 (M2 x 21)	M3 x 26	M4 x 31	SY9000-18-2 (M3 x 42)	For valve mounting (Matt nickel plated)



Mounting screw tightening torques

M2: 0.16 N·m M3: 0.8 N·m M4: 1.4 N·m




^{*} Thread type



SY3000/5000/7000/9000 Base Mounted

How to Order Interface Regulator

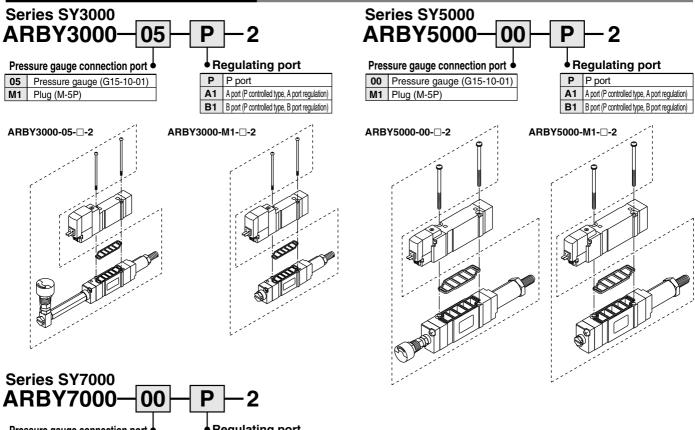


Pressure gauge connection port

	Pressure gauge (G15-10-01)
M1	Plug (M-5P)

Regulating port

	F poil		
A 1	A port (P controlled type, A port regulation)		
B1	B port (P controlled type, B port regulation)		

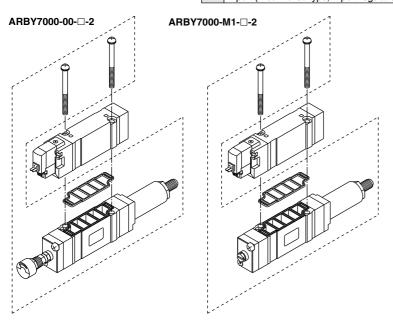

Accessory

Series	Round head combination screw	Gasket		
ARBY3000	SY3000-23-10 (M2 x 36)	SX3000-57-4		
ARBY5000	M3 x 48.5, Matt nickel plated	SX5000-57-6		
ARBY7000	M4 x 57, Matt nickel plated	SX7000-57-4		



Mounting screw tightening torques

M2: 0.16 N·m M3: 0.8 N·m M4: 1.4 N·m





Base Mounted


Dimensions: Series SY3000


2 position single

Grommet (G), (H): SY3140(R)-□H□□-01□-Q












With interface regulator

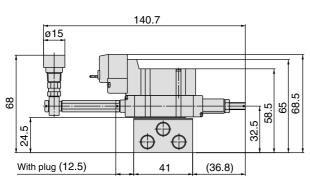





L plug connector (L): SY3140(R)-□L□□-01□-Q

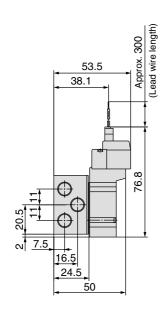

M plug connector (M): SY3140(R)-□M□□-01□-Q



M8 connector (WO): SY3140(R)-□WO□□-01□-Q




Note) Refer to back page 12 for dimensions of connector types.




SY3000/5000/7000/9000 Base Mounted


Dimensions: Series SY3000

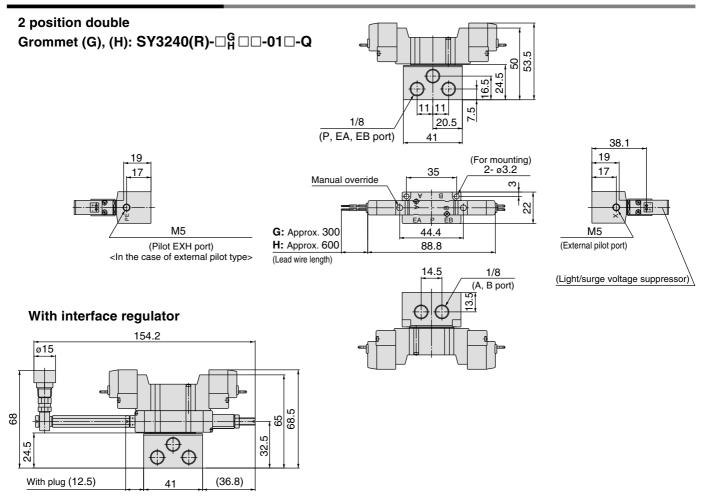


L plug connector (L): SY3240(R)-□L□□-01□-Q

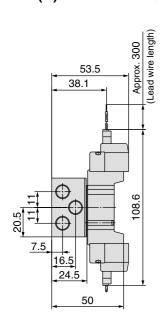

M plug connector (M): SY3240(R)-□M□□-01□-Q



M8 connector (WO): SY3240(R)-□WO□□-01□-Q

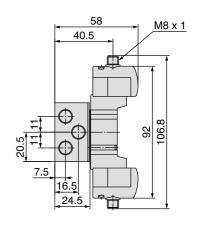



Note) Refer to back page 12 for dimensions of connector types.




Base Mounted


Dimensions: Series SY3000

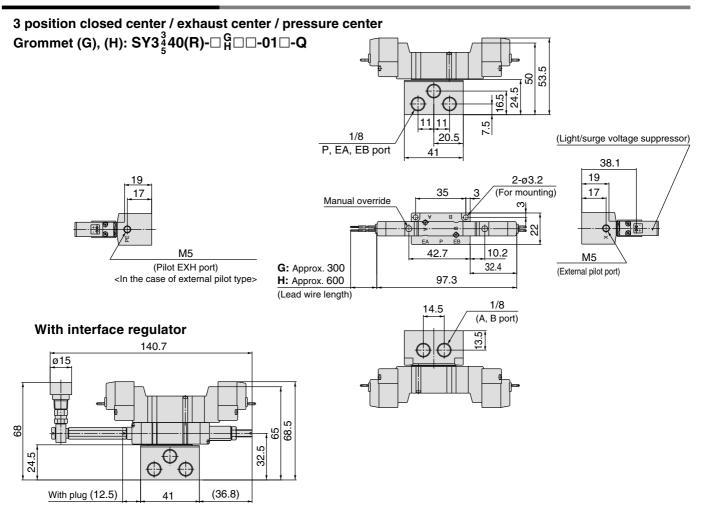




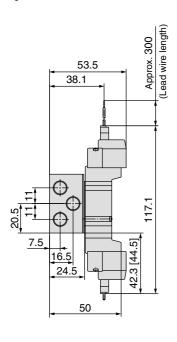

M plug connector (M): $SY3\frac{3}{4}40(R)-\Box M\Box\Box-01\Box-Q$



M8 connector (WO): SY3³/₂40(R)-□WO□□-01□-Q

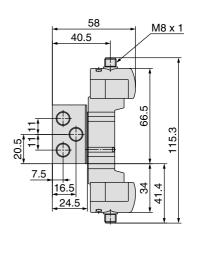


Note) Refer to back page 12 for dimensions of connector types.




SY3000/5000/7000/9000 Base Mounted

Dimensions: Series SY5000

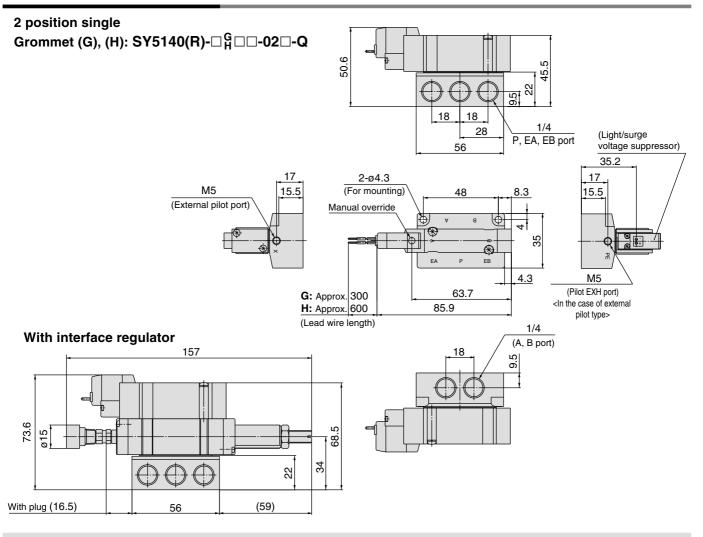

L plug connector (L):

M plug connector (M): SY5140(R)-□L□□-02□-Q SY5140(R)-□M□□-02□-Q DIN terminal (D): SY5140(R)-□D□□-02□-Q M8 connector (WO): SY5140(R)-□WO□□-02□-Q

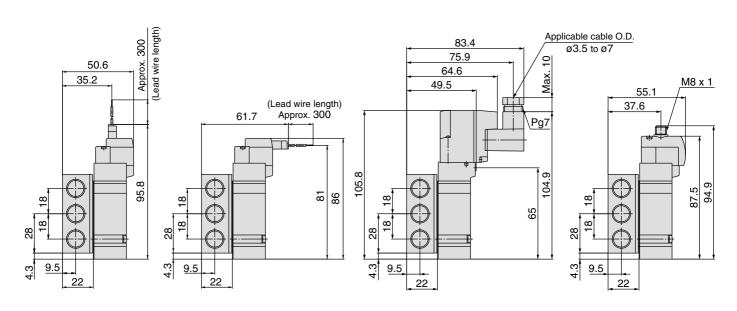



Note) Refer to back page 12 for dimensions of connector types.



Base Mounted


Dimensions: Series SY5000

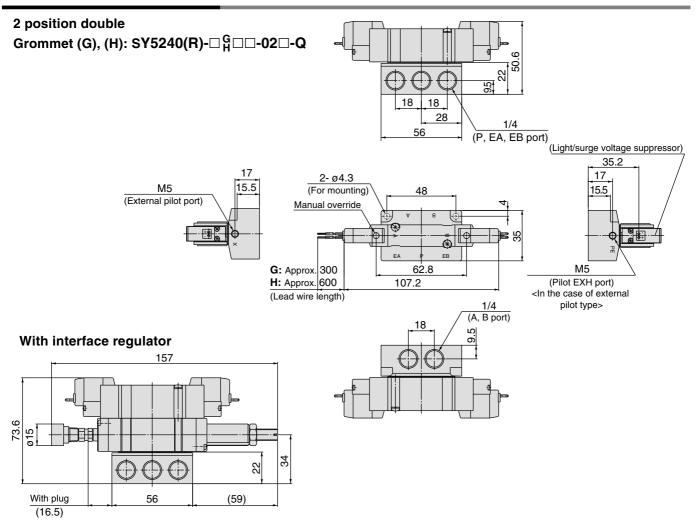


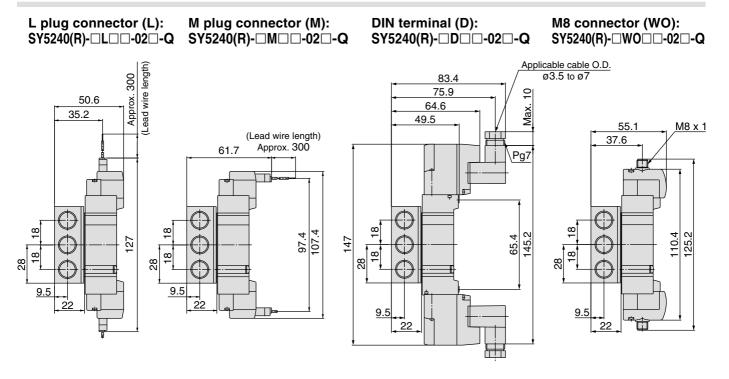

SY3000/5000/7000/9000 Base Mounted


Dimensions: Series SY5000

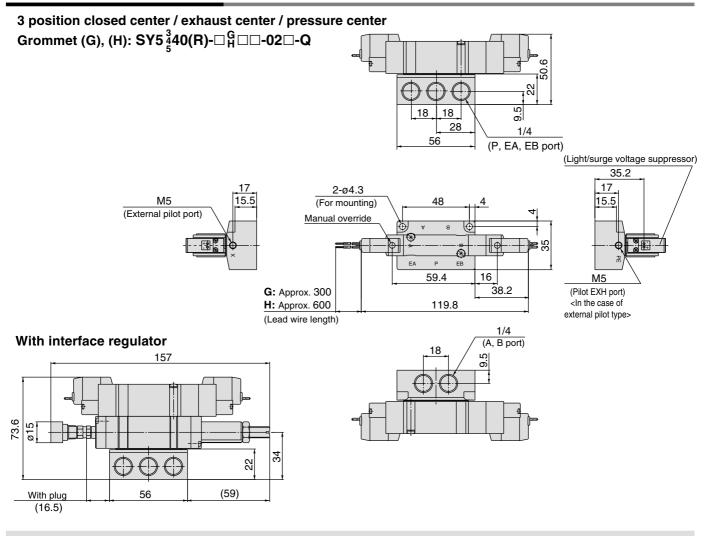

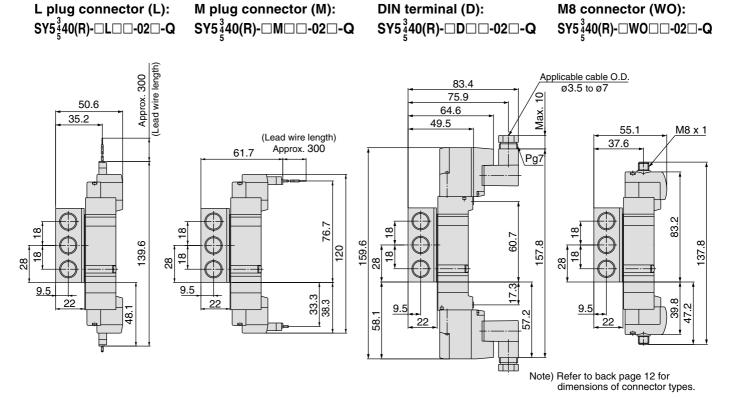

Base Mounted

Dimensions: Series SY7000

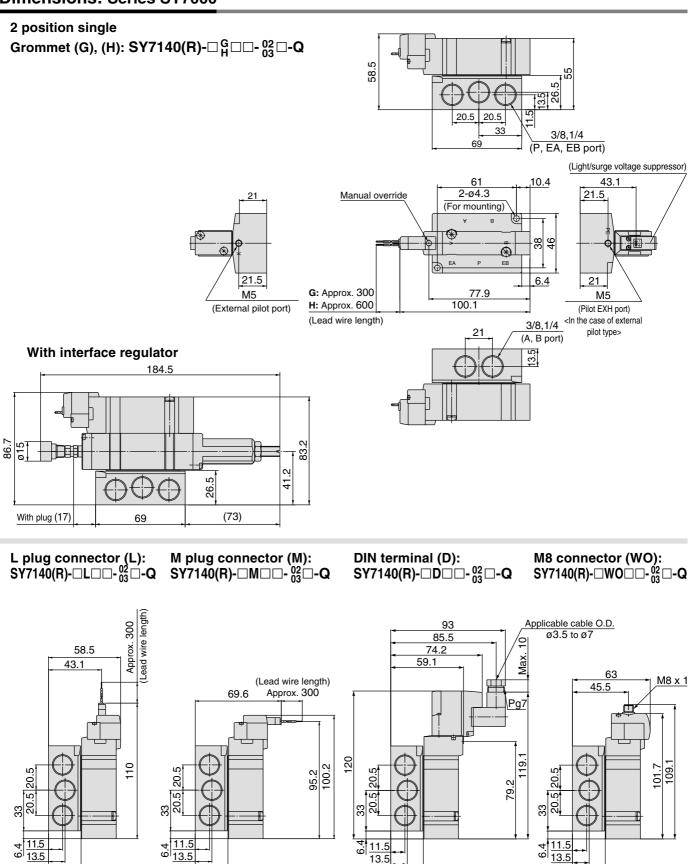

Note) Refer to back page 12 for dimensions of connector types.

26.5


26.5

_26.5

26.5


SY3000/5000/7000/9000 Base Mounted

Dimensions: Series SY7000

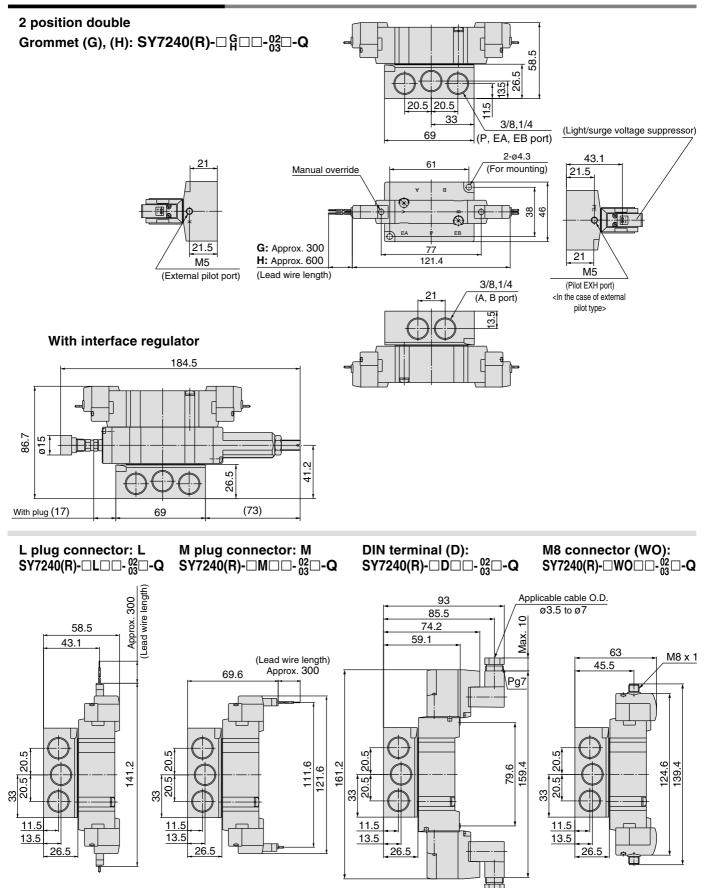


Base Mounted


Dimensions: Series SY7000

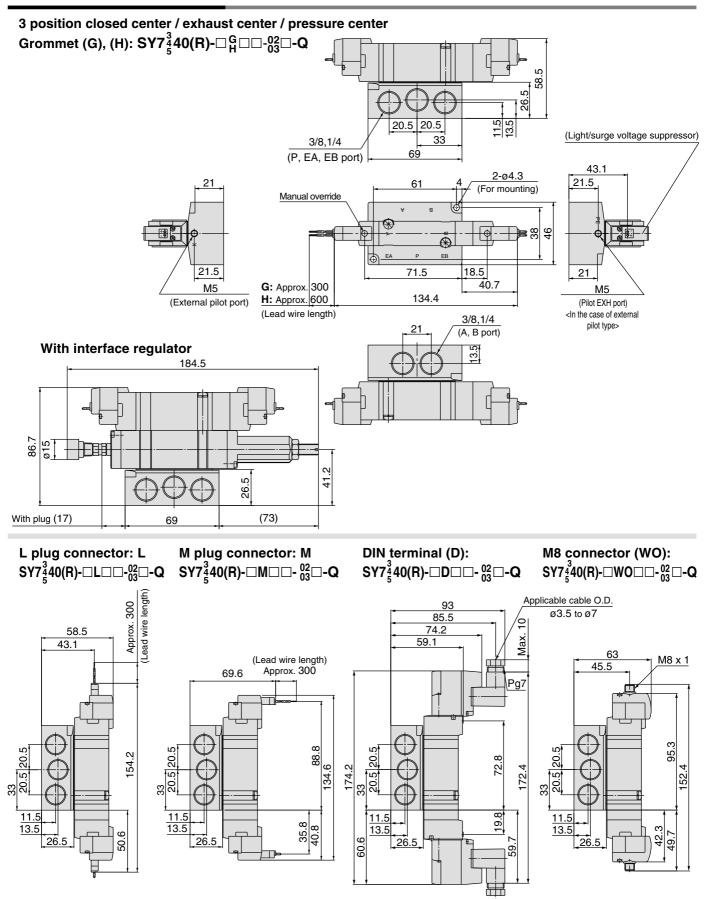

SY3000/5000/7000/9000 Base Mounted

Dimensions: Series SY9000

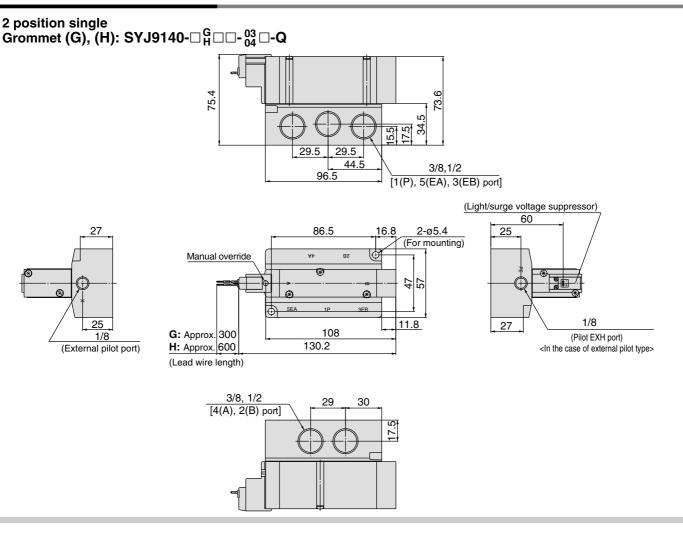

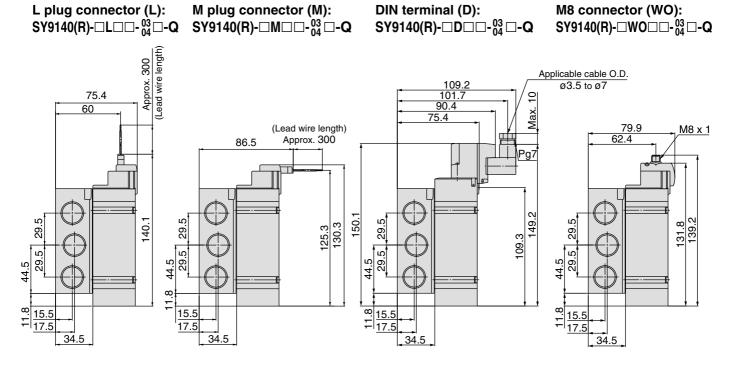


Note) Refer to back page 12 for dimensions of connector types.





Base Mounted


Dimensions: Series SY9000


2 position double Grommet (G), (H): SY9240(R)- $\Box_{H}^{G}\Box\Box_{04}^{O3}\Box$ -Q

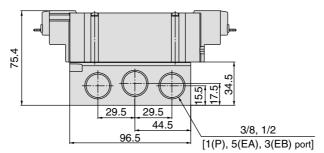




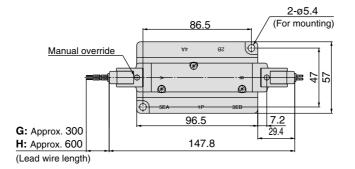



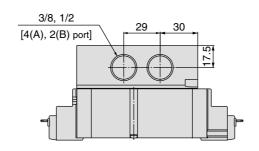

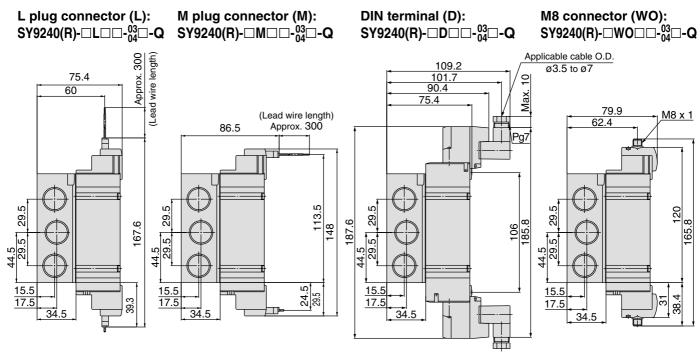



Note) Refer to back page 12 for dimensions of connector types.

SY3000/5000/7000/9000 Base Mounted

Dimensions: Series SY9000

3 position closed center / exhaust center / pressure center Grommet (G), (H): SY9 $_5^4$ 40- $\Box_H^G\Box\Box$ - $_{04}^{03}\Box$ -Q

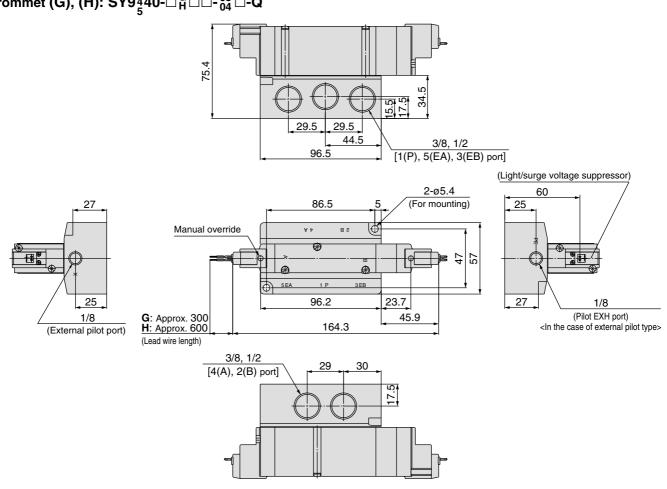

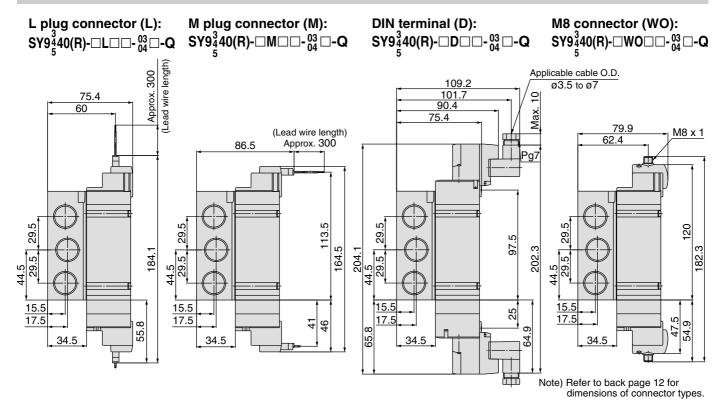





5 Port Solenoid Valve Series SY3000/5000/7000 **Body Ported Bar Stock Type/Individual Wiring**



How to Order Manifold



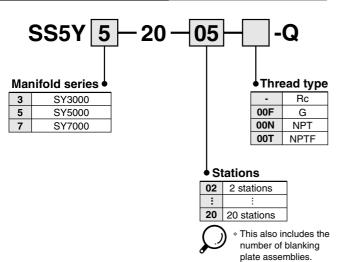

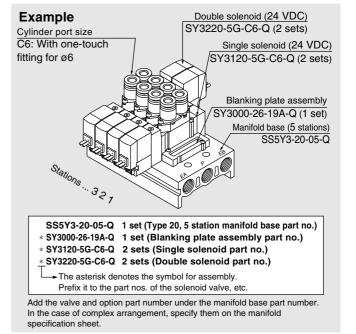


SY3000/5000/7000 Body Ported Type 20



How to Order Valve



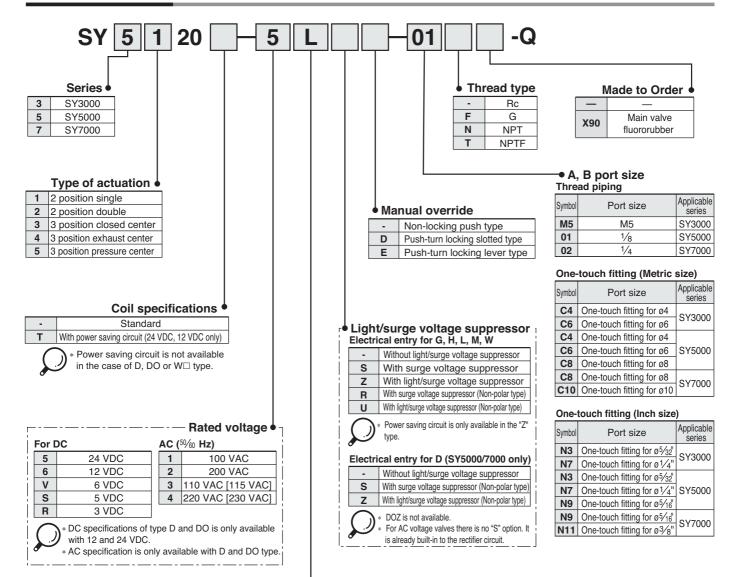

Electrical entry

	24, 12, 6, 5, 3	VDC	24, 12 VDC/ 100, 110, 200, 220 VAC	24, 12, 6, 5, 3 VDC
Grommet	L plug connector	M plug connector	DIN terminal Note2)	M8 connector *
length 300 mm H: Lead wire	LN: Without lead wire	M: With lead wire (Length 300 mm) MN: Without lead wire MO: Without connector	D: With connector DO: Without connector	WO: Without connector cable W□: With connector cable



- LN, MN type: with 2 sockets.
- * For DIN terminal of SY3000 series, refer to back page 228
- DIN terminal type "Y" which conforms to EN-175301-803C (former DIN43650C) is also available. For details, refer to page 227.
- * For connector cable of M8 connector, refer to page 230.
- * Connector M8 type "WA" conforming to IEC 60947-5-2 standard, is also available. For details, see page 211.


Note 1) Enter the cable length symbols in \square . Please be sure to fill in the blank referring to page 231.

Note2) SY5000/7000 only).



Note) When placing an order for body ported solenoid valve as a single unit, mounting bolt for manifold and gasket are not attached. Order them separately, if necessary. (For details, refer to catalogue in page 56.)





Manifold Specifications

Model		SS5Y3-20	SS5Y5-20	SS5Y7-20					
Applicable	valve	SY3□20	SY5□20	SY7□20					
Manifold typ	ре		Single base/B mount						
P (SUP)/R	(EXH)	Co	ommon SUP, Common EXH						
Valve static	ons		2 to 20 stations Note1)						
A, B port lo	cation	Valve							
	P, EA, EB port	1/8	1/4	1/4					
Port size	A, B port		1/8 C4 (One-touch fitting for ø4) C6 (One-touch fitting for ø6) C8 (One-touch fitting for ø8)						
Manifold base n: Stations	weight W (g)	W = 13n + 35	W = 36n + 64	W = 43n + 64					

 \mathcal{Q}^{N}

Flow Characteristics

	Port	size		Flow characteristics											
Model	1, 5, 3	4, 2	1 –	→ 4/2	$(P \rightarrow A)$	A/B)	4/2 →	5/3 ((A/B -	→ EA/EB)					
	(P, EA, EB)	(A, B)	C (dm3/(s-bar))	b	Cv	Q[e/min(ANR)]*	C (dm3/(s-bar))	b	Cv	Q[d/min(ANR)]*					
SS5Y3-20	1/8	C6	0.72	0.29	0.18	182	0.80	0.36	0.21	212					
SS5Y5-20	1/4	C8	1.9	0.28	0.48	477	2.2	0.20	0.53	527					
SS5Y7-20	1/4	C10	3.6	0.31	0.93	921	3.6	0.27	0.88	898					



Note) The value is for manifold base with 5 stations and individually operated 2 position type.


Note 1) For more than 10 stations (more than 5 stations in case of SS5Y7), supply pressure to P port on both sides and exhaust from EA/EB port on both sides.

Note 2) Refer to "Manifold Option" on page 56.


^{*} These values have been calculated according to ISO6358 and represent the flow rate measured in standard conditions at an upstream pressure of 0.6 MPa (relative pressure) and a differential pressure of 0.1MPa.


SY3000/5000/7000 Body Ported Type 20

SY3000: SS5Y3-20-Stations -Q

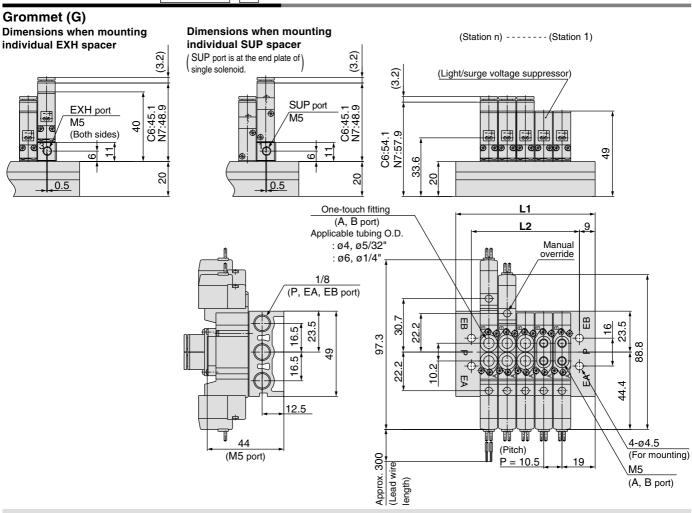

L plug connector (L) 108.6 54. Approx. 300 (Lead wire length) 33.6 49

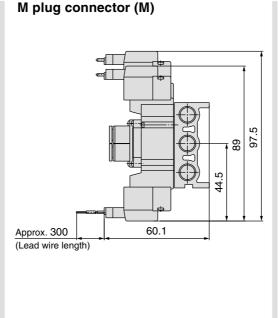

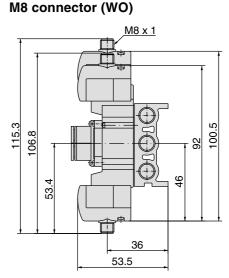


Note) Refer to back page 12 for dimensions of connector types.


Stations n	2 stations	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20 stations
L1	40	50.5	61	71.5	82	92.5	103	113.5	124	134.5	145	155.5	166	176.5	187	197.5	208	218.5	229
L2	30.5	41	51.5	62	72.5	83	93.5	104	114.5	125	135.5	146	156.5	167	177.5	188	198.5	209	219.5

Type 20 Body Ported

SY5000: SS5Y5-20-Stations - - Q

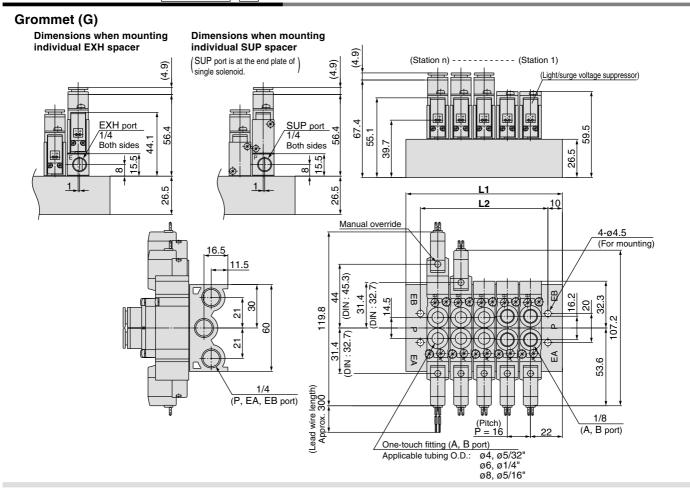


L plug connector (L) M plug connector (M) DIN terminal (D) M8 connector (WO)

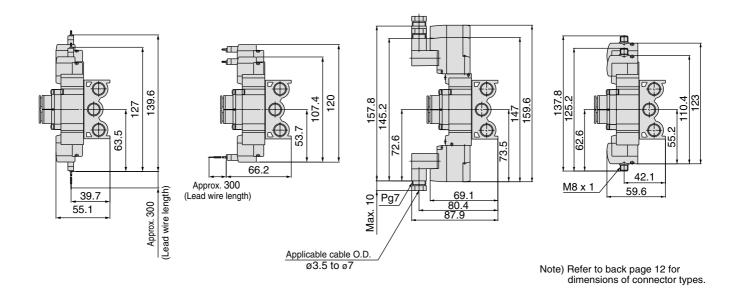


Stations n	2 stations	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20 stations
L1	60	76	92	108	124	140	156	172	188	204	220	236	252	268	284	300	316	332	348
L2	40	56	72	88	104	120	136	152	168	184	200	216	232	248	264	280	296	312	328

41

SY7000: SS5Y7-20-Stations -Q

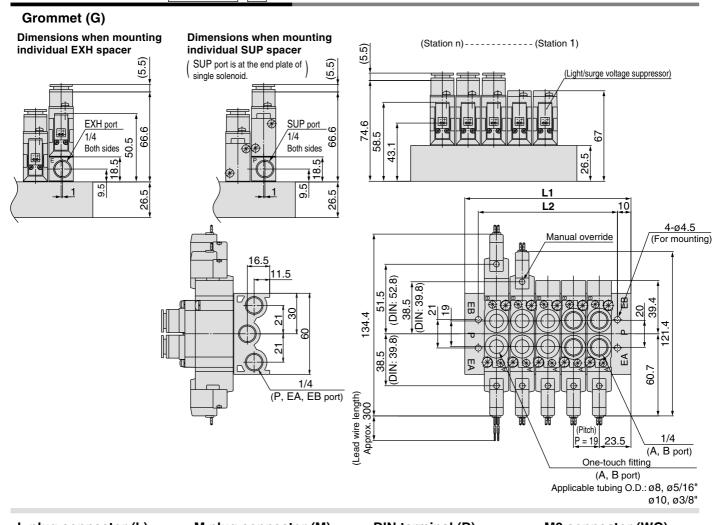

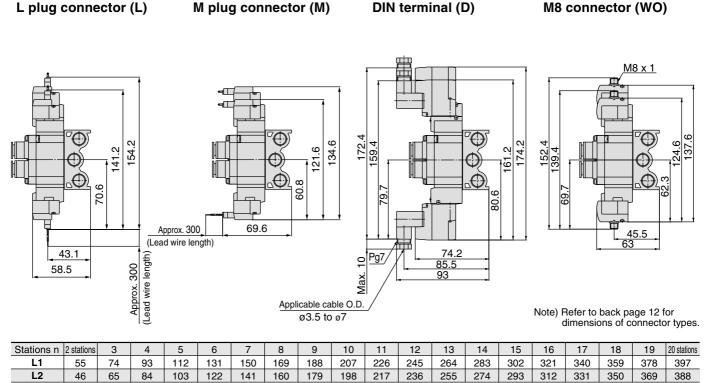




5 Port Solenoid Valve Series SY9000 Body Ported Stacking Type/Inc




Stacking Type/Individual Wiring

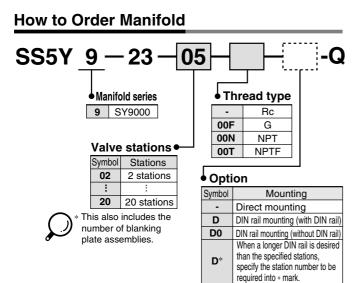


 Type 23 manifold of Series SY9000 is concurrently used for the internal and external pilot.

How to Order Valve Manifold Assembly (Example)

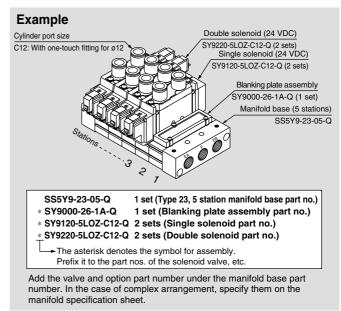

(€ 2%

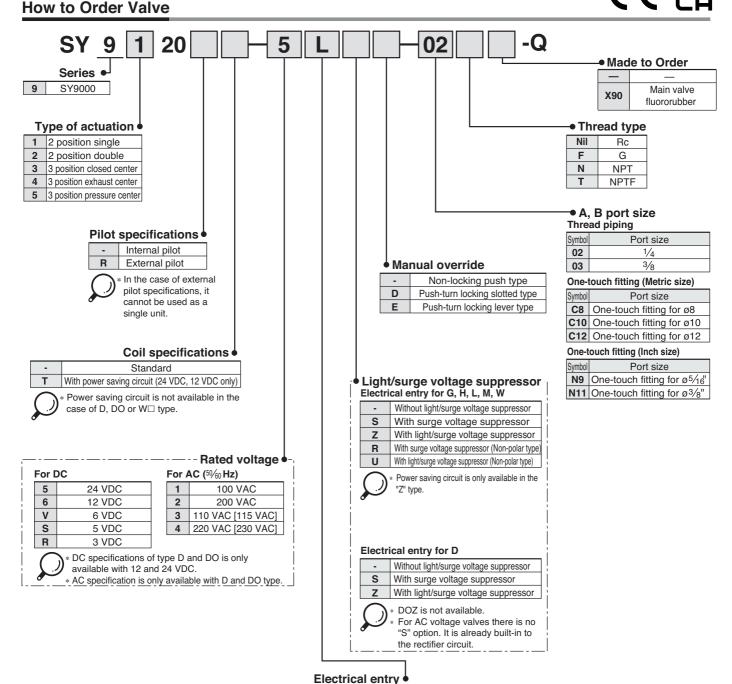

	24, 12, 6, 5, 3 VI	ос	24, 12 VDC/ 100, 110, 200, 220 VAC	24, 12, 6, 5, 3 VDC
Grommet	L plug connector	M plug connector	DIN terminal	M8 connector *
G: Lead wire length 300 mm H: Lead wire length 600 mm	L: With lead wire (Length 300 mm) LN: Without lead wire LO: Without connector	M: With lead wire (Length 300 mm) MN: Without lead wire MO: Without connector	D: With connector DO: Without connector	WO: Without connector cable W□: With connector cable

LN, MN type: with 2 sockets. DIN terminal type "Y" which conforms to EN-175301-803C (former DIN43650C) is also available. For details, refer to page 227.

For connector cable of M8 connector, refer to page 230.

* Connector M8 type "WA" conforming to IEC 60947-5-2 standard, is also available. For details, see page 211.

Note 1) Enter the cable length symbols in \Box . Please be sure to fill in the blank referring to page 231.



Note) When placing an order for body ported solenoid valve as a single unit, mounting bolt for manifold and gasket are not attached. Order them separately, if necessary. For details, refer to page 56



Type 23 Body Ported



Manifold Specifications

Model		SS5Y9-23
Applicable	valve	SY9□20
Manifold ty	ре	Stacking type
P (SUP)/R	(EXH)	Common SUP, Common EXH
Valve static	ons	2 to 20 stations Note1)
A, B port lo	cation	Valve
	P, EA, EB port	3/8
		1/4
Davidaina		3/8
Port size	A, B port	C8 (One-touch fitting for ø8)
		C10 (One-touch fitting for ø10)
		C12 (One-touch fitting for ø12)
Manifold bas n: Stations	se weight W (g)	W = 66n + 246



Note 1) For more than 10 stations, supply pressure to P port on both sides and exhaust from EA/EB port on both sides.

Flow Characteristics

	Port	size				Flow char	acteristics			
Model	1, 5, 3	4, 2	1-	→4/2	(P→A	VB)	4/2-	→5/3	(A/B-	→EA/EB)
	(P, EA, EB)	(A, B)	C (dm3/(s-bar))	b	Cv	Q[d/min/ANR)]*	C (dm3/(s·bar))	b	Cv	Q[d/min/ANR)]*
SS5Y9-23	3/8	C12	6.3	0.20	1.5	1509	8.2	0.28	1.9	2059




Note) The value is for manifold base with 5 stations and individually operated 2 position type.




Note 2) Refer to "Manifold Option" on page 56.

^{*} These values have been calculated according to ISO6358 and represent the flow rate measured in standard conditions at an upstream pressure of 0.6 MPa (relative pressure) and a differential pressure of 0.1MPa.

SY9000: SS5Y9-23- Stations -(D)-□(D)-Q

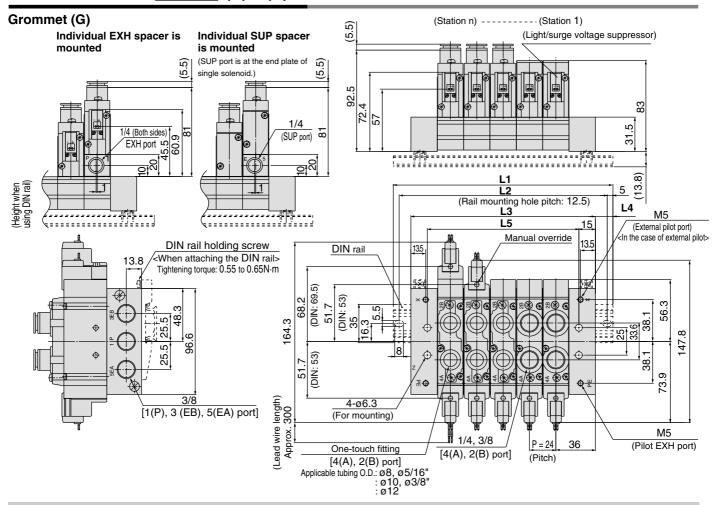

L plug connector (L) M plug connector (M) DIN terminal (D) M8 connector (WO)

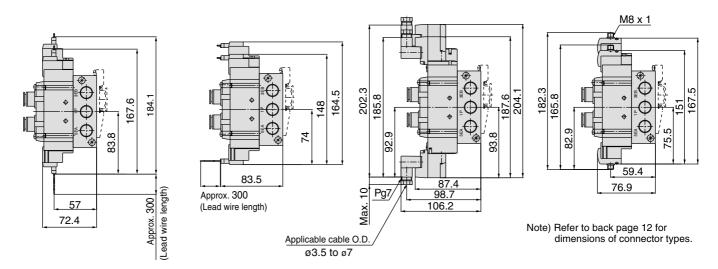

Stations n	2 stations	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20 stations
L1	123	148	173	198	223	248	273	298	323	335.5	360.5	385.5	410.5	435.5	460.5	485.5	510.5	535.5	560.5
L2	112.5	137.5	162.5	187.5	212.5	237.5	262.5	287.5	312.5	325	350	375	400	425	450	475	500	525	550
L3	96	120	144	168	192	216	240	264	288	312	336	360	384	408	432	456	480	504	528
L4	13.5	14	14.5	15	15.5	16	16.5	17	17.5	12	12.5	13	13.5	14	14.5	15	15.5	16	16.5
L5	66	90	114	138	162	186	210	234	258	282	306	330	354	378	402	426	450	474	498

Note) In the case of direct mounting without DIN rail, total width of manifold is L3.







5 Port Solenoid Valve Series SY3000/5000/7000 Body Ported

Bar Stock Type/Flat Ribbon Cable

How to Order Manifold

How to Order Valve Manifold Assembly (Example)

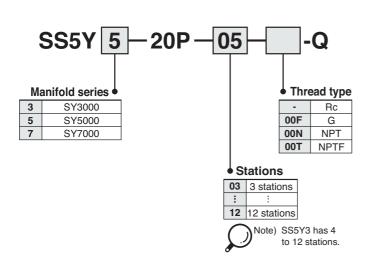

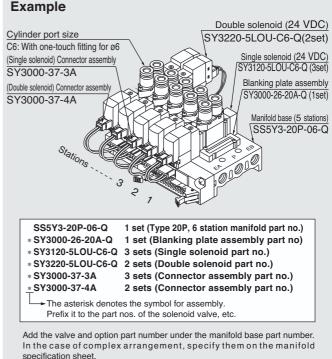


SY3000/5000/7000 Body Ported Type 20P



How to Order Valve



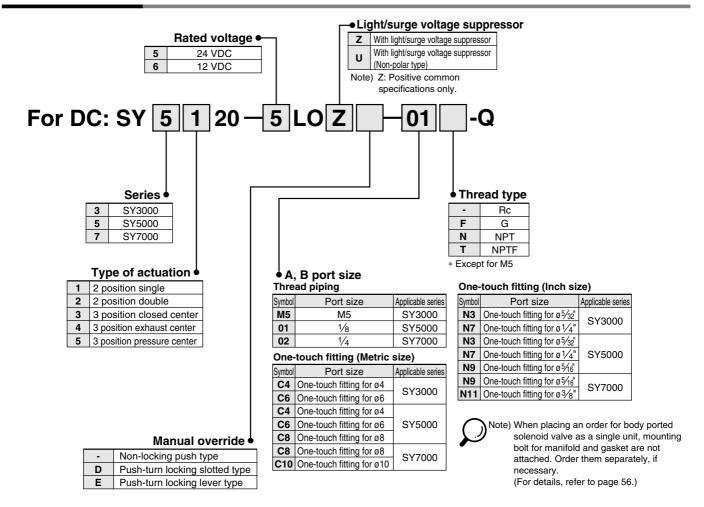





Multiple valve wiring is simplified through the use of the flat cable connector


• Clean appearance

In the case of a flat ribbon cable type, each valve is wired on the print board of manifold base to allow the external wiring to be piped all together with 26 pins MIL connector.



Manifold Specifications

Model		SS5Y3-20P	SS5Y5-20P	SS5Y7-20P					
Applicable v	alve	SY3□20	SY5□20	SY7□20					
Manifold typ	е	Single base/B mount							
P (SUP)/R (EXH)	Common SUP, Common EXH							
Valve station	าร	4 to 12 stations ⁽¹⁾	3 to 12 sta	ations Note 1)					
A, B port loc	ation		Valve						
	P, EA, EB port	1/8	1/4	1/4					
Port size	A, B port	M5, C4 (One-touch fitting for ø4) C6 (One-touch fitting for ø6)	1/8 C4 (One-touch fitting for ø4) C6 (One-touch fitting for ø6) C8 (One-touch fitting for ø8)	1/4 C8 (One-touch fitting for ø8) C10 (One-touch fitting for ø10)					
Manifold base n: Stations	e weight W (g)	W = 19n + 45	W = 43n + 77	W = 51n + 81					
Applicable flat ribb	on cable connector	Flat ribbon cable connector, Socket: 26 pins MIL type with strain relief, Conforming to MIL-C-83503							
Internal wirir	ng	In common between +COM and -COM (Z type: +COM only).							
Rated voltag	je		12, 24 VDC						



vote 2) The withstand voltage specification for the wiring unit section is 315 C 0704, Grade T or its equivalent.

Note 3) Refer to "Manifold Option" on page 56.

Flow Characteristics

	Port	size				Flow char	acteristics			
Model	1, 5, 3	4, 2	1 →	4/2 ($P \rightarrow P$	N/B)	4/2 →	$(A/B \rightarrow EA/EB)$		
	(P, EA, EB)	(A, B)	C [dm3/(s·bar)]	b	Cv	Q[d/min(ANR)]*	C [dm3/(s·bar)]	b	Cv	Q[d/min(ANR)]*
SS5Y3-20P	1/8	C6	0.72	0.29	0.18	182	0.80	0.36	0.21	212
SS5Y5-20P	1/4	C8	1.9	0.28	0.48	477	2.2	0.20	0.53	527
SS5Y7-20P	1/4	C10	3.6	0.31	0.93	921	3.6	0.27	0.88	898



Note) The value is for manifold base with 5 stations and individually operated 2 position type.

* These values have been calculated according to ISO6358 and represent the flow rate measured in standard conditions at an upstream pressure of 0.6 MPa (relative pressure) and a differential pressure of 0.1 MPa.

How to Order Connector Assembly


For 12, 24 VDC

For DC	For SY3000	For SY5000/7000
For single solenoid:	SY3000-37-3A	SY5000-37-3A
Double solenoid, 3 position type	SY3000-37-4A	SY5000-37-4A
Single with spacer assembly	SY5000-37-3A	SY5000-37-5A
Double, 3 position with spacer assembly	SY3000-37-6A	SY5000-37-6A

∴ Caution


 For non-polar (U) valves, the electrical DC connections can be used with either positive and negative COM. For type (Z), only use with positive COM as the valve does not operate correctly when used with negative COM.

Internal Wiring of Manifold (Non-polar type)

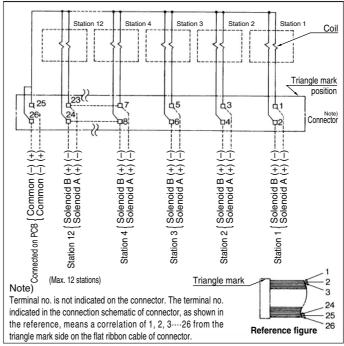




- For more than 10 stations, both poles of the common should be wired.
- For single solenoid, connect to the solenoid A side
- The maximum number of stations that can be accommodated is 12. For more stations, please contact SMC.







SY3000: SS5Y3-20P-Stations - -Q

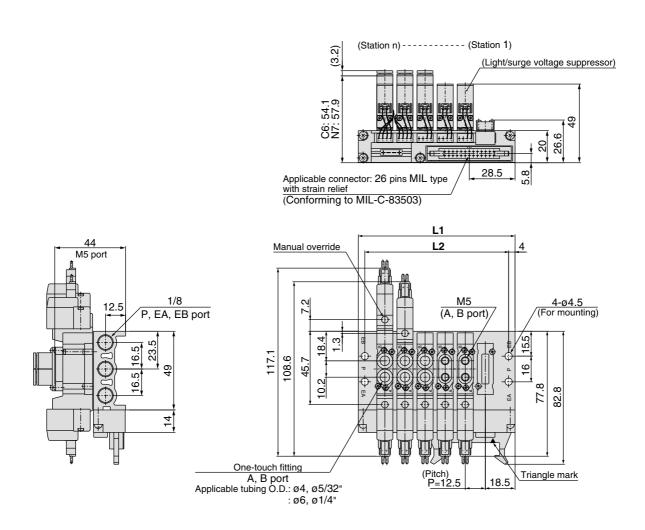



Stations n	4	5	6	7	8	9	10	11	12
L1	72.5	85	97.5	110	122.5	135	147.5	160	172.5
L2	64.5	77	89.5	102	114.5	127	139.5	152	164.5


SMC



SY5000: SS5Y5-20P-Stations - -Q

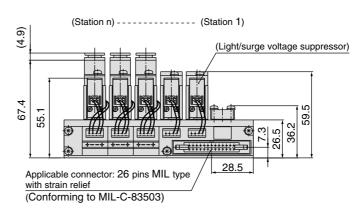

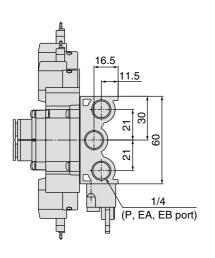

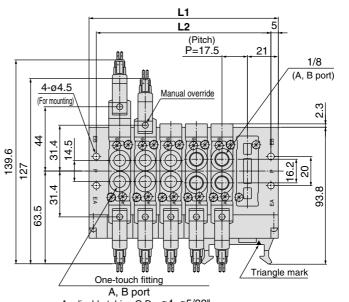


A, B port Applicable tubing O.D.: Ø4, Ø5/32" Ø6, Ø1/4" Ø8, Ø5/16"

Stations n	3	4	5	6	7	8	9	10	11	12
L1	77	94.5	112	129.5	147	164.5	182	199.5	217	234.5
L2	67	84.5	102	119.5	137	154.5	172	189.5	207	224.5



SY7000: SS5Y7-20P- Stations -□-Q

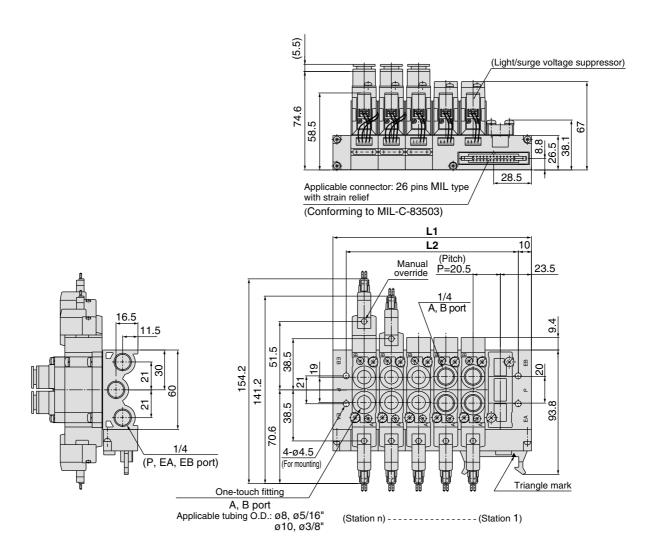


Stations n	3	4	5	6	7	8	9	10	11	12
L1	88	108.5	129	149.5	170	190.5	211	231.5	252	272.5
L2	68	88.5	109	129.5	150	170.5	191	211.5	232	252.5




5 Port Solenoid Valve Series SY9000 Body Ported CA Stacking Type/Flat Ribbon Cable


How to Order Manifold

How to Order Valve Manifold Assembly (Example)

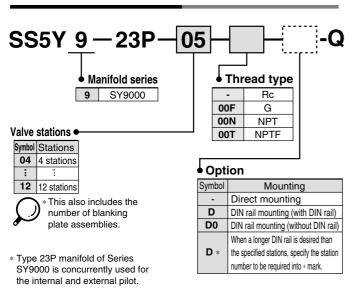

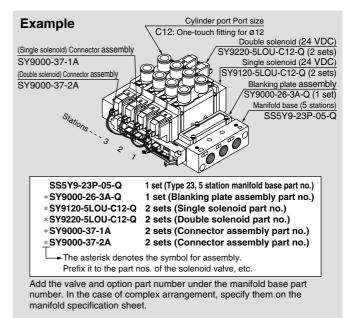

How to Order Valve

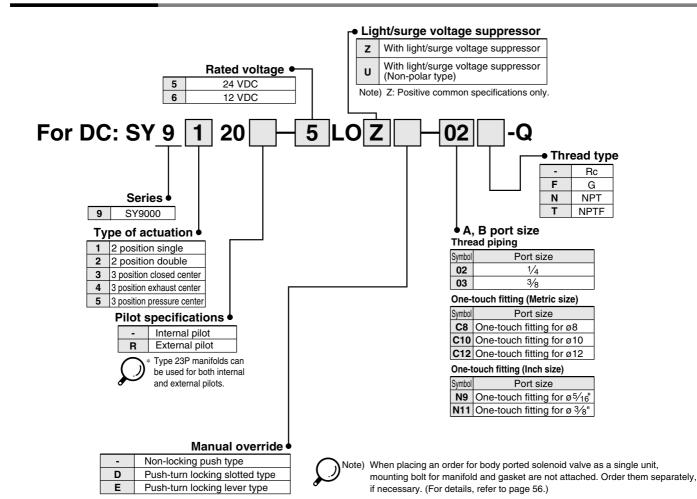

• Multiple valve wiring is simplified through the use of the flat cable connector.

Clean appearance

In the case of a flat ribbon cable type, each valve is wired on the print board of manifold base to allow the external wiring to be piped all together with 26 pins MIL connector.



Manifold Specifications

Model		SS5Y9-23P						
Applicable v	/alve	SY9□20						
Manifold typ	ре	Stacking type						
P (SUP)/R (EXH)		Common SUP, Common EXH						
Valve stations		4 to 12 stations Note1)						
A, B port location		Valve						
P, EA, EB port		3/8						
Port size	A, B port	1/4 3/8 C8 (One-touch fitting for ø8) C10 (One-touch fitting for ø10) C12 (One-touch fitting for ø12)						
Manifold base weight W (g) n: Stations		W = 73n + 259						
Applicable flat ribbon cable connector		Flat ribbon cable connector, Socket: 26 pins MIL with strain relief, Conforming to MIL-C-83503						
Internal wiring		In common between +COM and -COM (Z type: +COM only)						
Rated voltage		12, 24 VDC						

Note 1) For more than 10 stations, supply pressure to P port on both sides and exhaust from EA/EB port on both sides.

Note 2) The withstand voltage specification for the wiring unit section is JIS C 0704, Grade 1 or its equivalent.

Note 3) Refer to "Manifold Option" on page 56.

How to Order Connector Assembly

For 12, 24 VDC

Specifications	For SY9000
For single solenoid	SY9000-37-1A
Double solenoid 3 position	SY9000-37-2A
Single with spacer assembly	SY9000-37-3A
Double, 3 position with spacer assembly	SY9000-37-4A


Flow Characteristics

	Port	size				Flow characteristics						
Model	1,5,3	4 ,2	1 →	4/2 ($P \to$	A/B)	4/2 →	5/3 (/	4/B –	→ EA/EB)		
	(P ,EA ,EB)	(A,B)	C (dm3/(s-bar))	b	Cv	Q[t/min(ANR)]*	C (dm3/(s-bar))	b	Cv	Q[e/min(ANR)]*		
SS5Y9-23P	3/8	C12	6.3	0.20	1.5	1509	8.2	0.28	1.9	2059		

Note) The value is for manifold base with 5 stations and individually operated 2 position type.


* These values have been calculated according to ISO6358 and represent the flow rate measured in standard conditions at an upstream pressure of 0.6 MPa (relative pressure) and a differential pressure of 0.1MPa.

Internal Wiring of Manifold (Non-polar type)

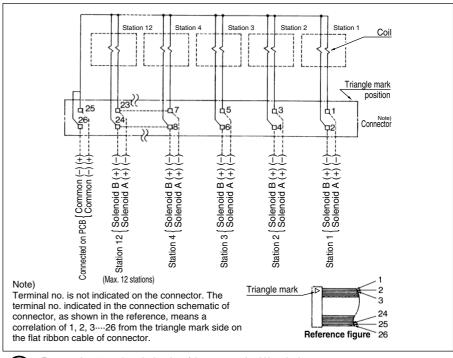




 For non-polar (U) valves, the electrical DC connections can be used with either positive and negative COM. For type (Z), only use with positive COM as the valve does not operate correctly when used with negative COM.



• For single solenoid, connect to the solenoid A side


• The maximum number of stations that can be accommodated is 12. For more stations, please contact SMC.







SY9000: SS5Y9-23P-Stations -□-(D)-Q

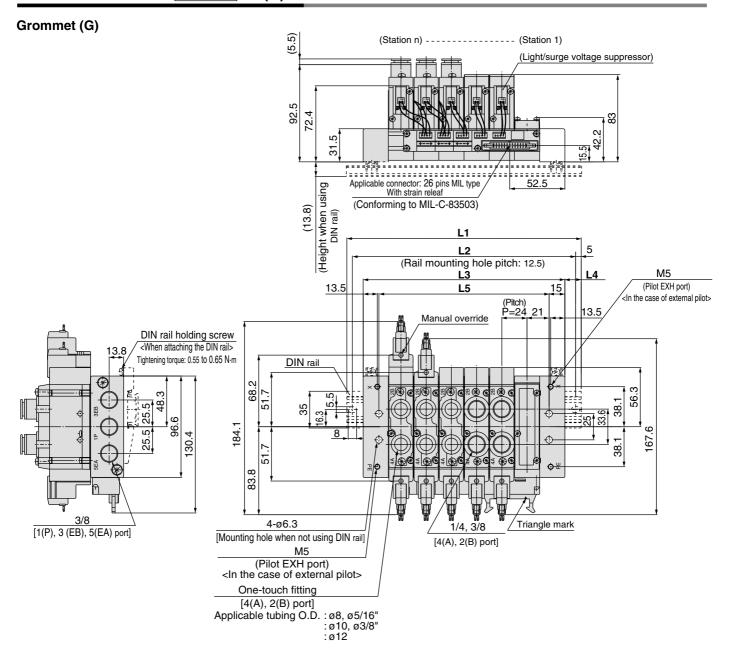

Stations n	4 stations	5	6	7	8	9	10	11	12 stations
L1	173	198	223	248	273	298	323	335.5	360.5
L2	162.5	187.5	212.5	237.5	262.5	287.5	312.5	325	350
L3	144	168	192	216	240	264	288	312	336
L4	14.5	15	15.5	16	16.5	17	17.5	12	12.5
L5	114	138	162	186	210	234	258	282	306


Note) In the case of direct mounting without DIN rail, total width of manifold is L3.




EX510 Gateway-type Serial Transmission System Body Ported Manifold/Integrated Base Series SY3000/5000/7000

(€ 2%

How to Order Manifold

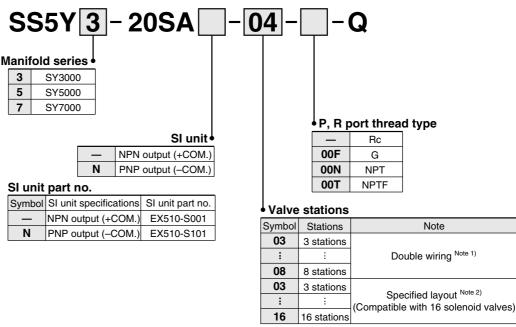

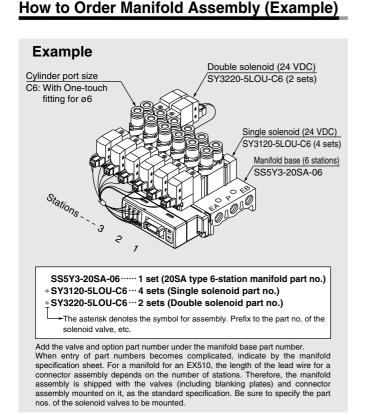


- SS5Y3 can be set from 4 stations.
- The number of the blanking plate assembly is also included.
- Note 1) Double wiring: Use of a single solenoid will result in an unused control signal. If this is not desired, order with a specified
- Note 2) Specified layout: Indicate wiring specifications on the manifold specification sheet. (Note that double and 3 position valves cannot be used where single solenoid wiring has been specified.)






How to Order Valves



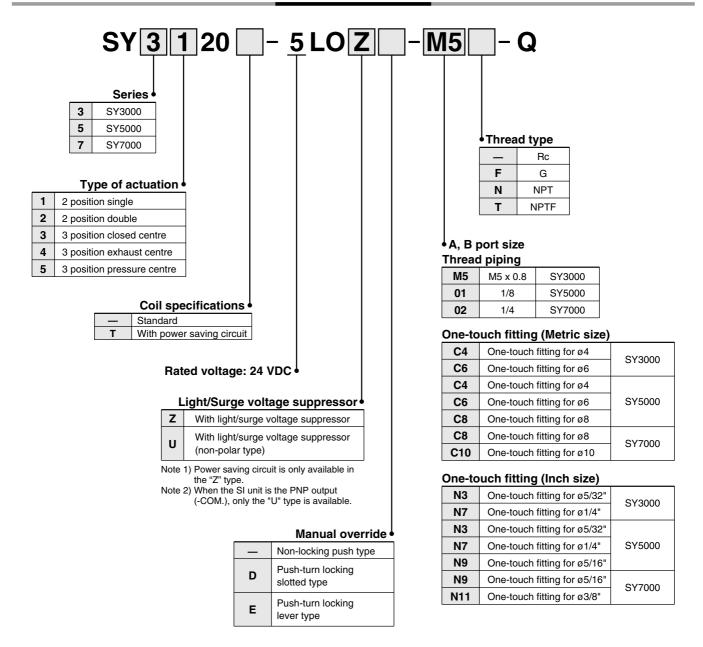

Note) When placing an order for body ported solenoid valve as a single unit, mounting screw for manifold and gasket are not attached. Order them separately, if necessary.

■Gasket assembly part no.

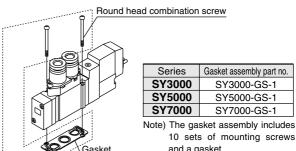


10 sets of mounting screws and a gasket.




Type 20SA Series SY3000/5000/7000

SY3000: SS5Y3-20SA - Stations -

(Station n) ----- (Station 1)

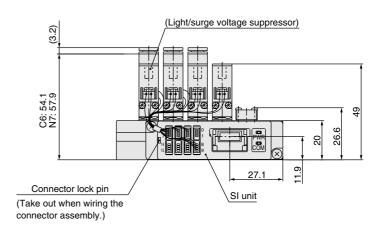

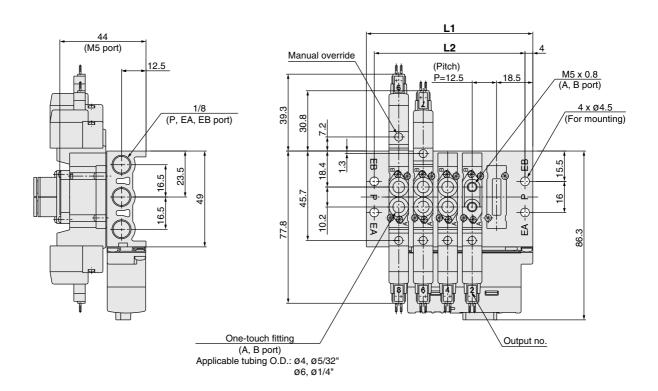



Stations n	4 stations	5	6	7	8	9	10	11	12	13	14	15	16 stations
L1	72.5	85	97.5	110	122.5	135	147.5	160	172.5	185	197.5	210	222.5
L2	64.5	77	89.5	102	114.5	127	139.5	152	164.5	177	189.5	202	214.5


Body Ported Manifold Series SY3000/5000/7000 Type 20SA



- Stations -SY5000: SS5Y5-20SA

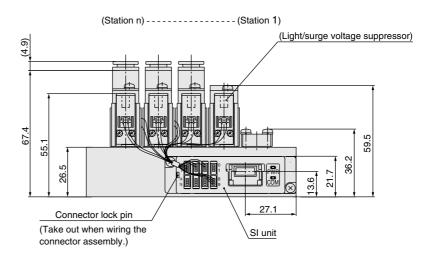

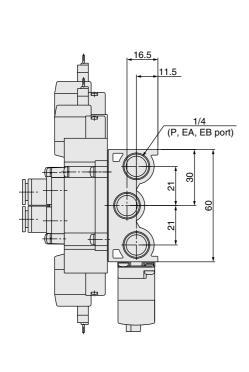


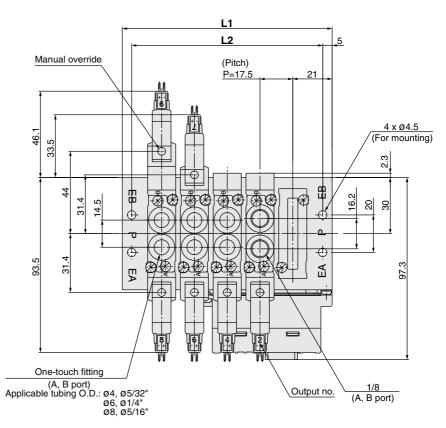


Stations n	3 stations	4	5	6	7	8	9	10	11	12	13	14	15	16 stations
L1	77	94.5	112	129.5	147	164.5	182	199.5	217	234.5	252	269.5	287	304.5
L2	67	84.5	102	119.5	137	154.5	172	189.5	207	224.5	242	259.5	277	294.5

Type 20SA Series SY3000/5000/7000

SY7000: SS5Y7-20SA - Stations -

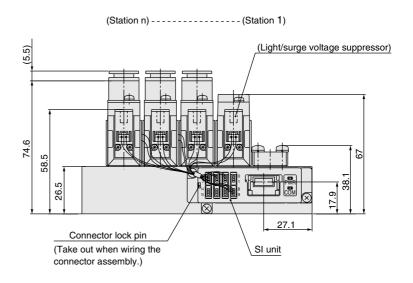

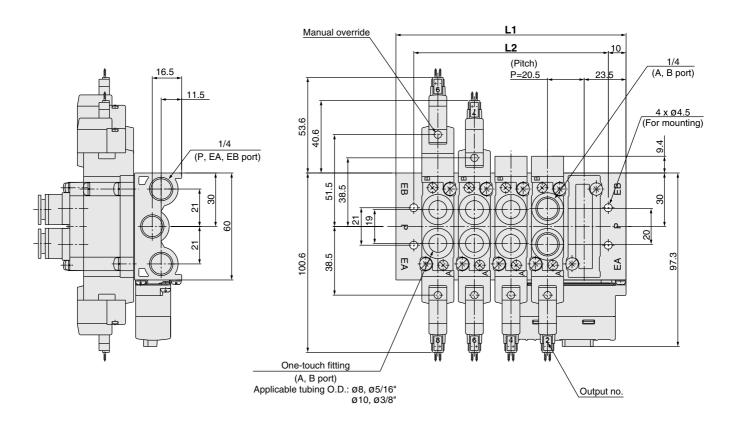


Stations n	3 stations	4	5	6	7	8	9	10	11	12	13	14	15	16 stations
L1	88	108.5	129	149.5	170	190.5	211	231.5	252	272.5	293	313.5	334	354.5
L2	68	88.5	109	129.5	150	170.5	191	211.5	232	252.5	273	293.5	314	334.5




EX510 Gateway-type Serial Transmission System Body Ported Manifold/Stacking Type

Series SY9000 (ELE

How to Order Manifold

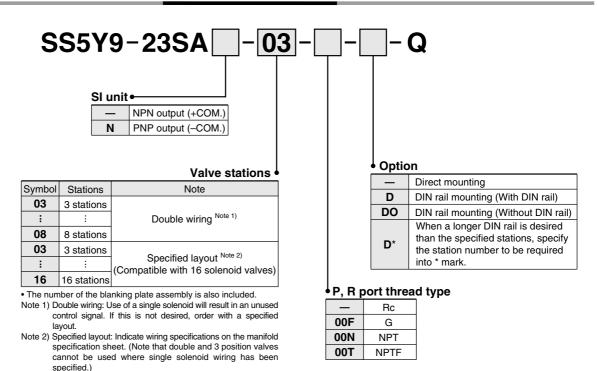

How to Order Manifold Assembly (Example)

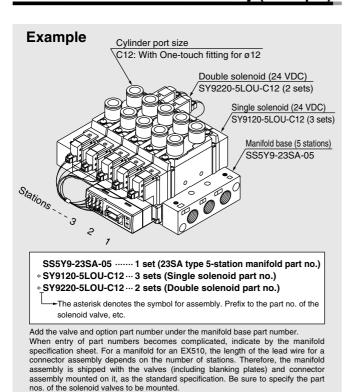


SI unit part no.

Symbol	SI unit specifications	SI unit part no.
_	NPN output (+COM.)	EX510-S001
N	PNP output (-COM.)	EX510-S101



How to Order Valves



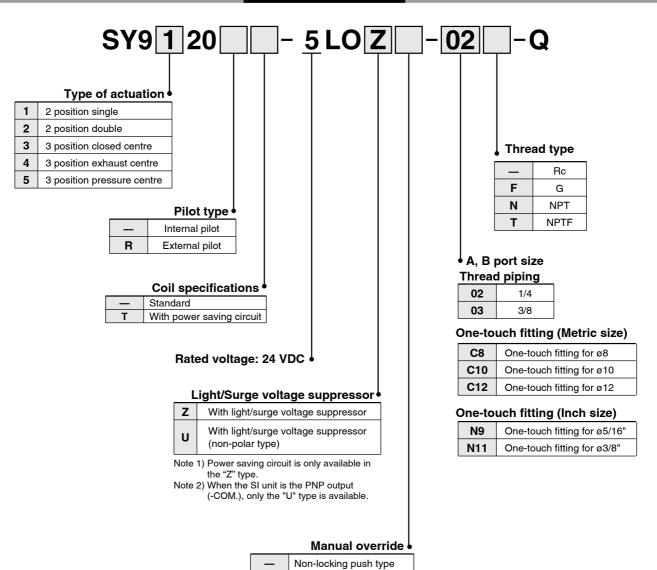

Push-turn locking

Push-turn locking

slotted type


lever type

D

Ε

Note) When placing an order for body ported solenoid valve as a single unit, mounting screw for manifold and gasket are not attached. Order them separately, if necessary.

■Gasket assembly part no.

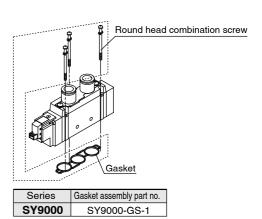


Note) The gasket assembly includes 10 sets of mounting screws and a gasket.



Type 23SA Series SY9000

SY9000: SS5Y9-23SA ___- Stations - __ (-D)

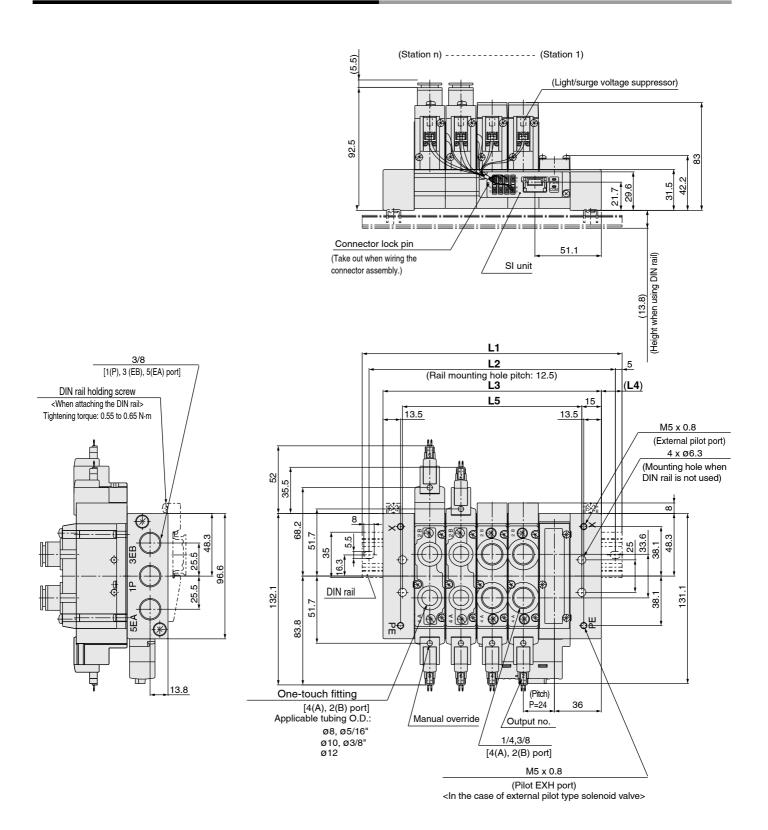

Stations n	3 Stations	4	5	6	7	8	9	10	11	12	13	14	15	16 Stations
L1	148	173	198	223	248	273	298	323	335.5	360.5	385.5	410.5	435.5	460.5
L2	137.5	162.5	187.5	212.5	237.5	262.5	287.5	312.5	325	350	375	400	425	450
L3	120	144	168	192	216	240	264	288	312	336	360	384	408	432
L4	14	14.5	15	15.5	16	16.5	17	17.5	12	12.5	13	13.5	14	14.5
L5	90	114	138	162	186	210	234	258	282	306	330	354	378	402

Manifold Option

■ Type 20, 23 Blanking plate assembly




Series	Assembly part no.			
SY3000	SY3000-26-19A-Q			
SY5000	SY5000-26-1A-Q			
SY7000	SY7000-26-1A-Q			
SY9000	SY9000-26-1A-Q			

■ Type 20P, 23P Blanking plate assembly



Series	Assembly part no.
SY3000	SY3000-26-20A-Q
SY5000	SY5000-26-3A-Q
SY7000	SY7000-26-3A-Q
CVONN	SV0000-26-3A


■ Gasket assembly part no.



Series	Gasket assembly			
SY3000	SY3000-GS-1			
SY5000	SY5000-GS-1			
SY7000	SY7000-GS-1			
SY9000	SY9000-GS-1			

Note) Gasket assembly consists of mounting screws and a gasket. (10 gasket units + screws)

■ Individual SUP spacer assembly




Series	Assembly part no.	Port size	t
SY3000	SY3000-38-20A-Q	M5	10.5
SY5000	SY5000-38-1*A-Q	1/8	15
SY7000	SY7000-38-1*A-Q	1/4	18
SY9000	SY9000-38-1*A-Q	1/4	20

Note) • The SUP port of SY3000/5000/7000 may be either on the lead wire side or on the end plate side. However, as the CE-compliant products (-Q) must be mounted in the specified direction, the port directions cannot be changed. (An assembly is shipped under the conditions shown in the figure.)
• For the SY9000, it can only be used on the

end plate side.

■ Individual EXH spacer assembly



Series	Assembly part no.	Port size	t
SY3000	SY3000-39-20A-Q	M5	10.5
SY5000	SY5000-39-1*A-Q	1/8	15
SY7000	SY7000-39-1*A-Q	1/4	18
SY9000	SY9000-39-1*A-Q	1/4	20

Note) In case of 20P and 23P, for protection of the wiring unit section from drainage, piping at the EA port should be arranged so that it will not be directly exposed to exhaust from the valve.

* Thread type

N


Т

Rc G

NPT

NPTF

Individual SUP spacer assembly + Individual EXH spacer assembly (Double spacer)

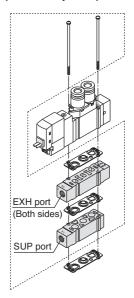

[O: Available X: Not available]

Series	Individual SUP +		Applicable manifold types			
	Individual EXP Assemble part no.	Port size	20	20P		
SY3000	SY3000-120-1A-Q	M5		×		
SY5000	SY5000-75-2*A-Q	1/8		×		
SY7000	SY7000-73-3*A-Q	1/4	•	×		

Note) The SUP spacer's port does not have an orientation. However, as the CE-compliant products (-Q) must be mounted in the specified direction, the port directions cannot be changed. As for the EXH ports, adjust the symbol "5" to the pilot valve side. Also, please make sure to connect the individual ports to protect the wiring section of the pilot valve from drainage, etc.

The individual SUP spacer and EXH spacer can be mounted either on the upper side or lower side. (The above illustration shows the condition when the product is shipped out from a factory.)

⚠ Caution

Mounting screw tightening torques

M2: 0.16 N·m M3: 0.8 N·m M4: 1.4 N·m



When mounting a valve or spacer on the manifold base or sub-plate, etc., those mounting directions are determined. If mounted in the wrong direction, the equipment to be connected may cause malfunction. Refer to external dimensions, and then mount it.







Series SY3000/5000/7000/9000

Manifold Option

■ Connector assembly For single solenoid (SY3000-37-81A-□-N)



For double solenoid (SY3000-37-81A-



Connector assembly order no. (Can be used for the manifold without a specified layout (8 stations or less)) Integrated type


Model	Part no.	Connector mounting position
	SY3000-37-81A-3-N	Single : For 1 to 4 stations
SS5Y3-20SA	SY3000-37-81A-3-6	Double/3 position: For 1 to 4 stations
33313-203A	SY3000-37-81A-2-N	Single : For 5 to 8 stations
	SY3000-37-81A-2-4	Double/3 position: For 5 to 8 stations
SS5Y5-20SA	SY3000-37-81A-3-N	Single : For 1 to 8 stations
33313-203A	SY3000-37-81A-3-6	Double/3 position: For 1 to 8 stations
	SY3000-37-81A-3-N	Single : For 1 to 4 stations
SS5Y7-20SA	SY3000-37-81A-3-6	Double/3 position: For 1 to 4 stations
33317-203A	SY3000-37-81A-4-N	Single : For 5 to 8 stations
	SY3000-37-81A-4-7	Double/3 position: For 5 to 8 stations

Note) The above is for the station addition or maintenance. When ordering a connector assembly separately, a number would not be printed on the connector.

■ Connector assembly SY3000-37-80A-□



■ Housing (8 pcs./set) SY3000-44-3A



Connector assembly order no. (Can be used for the manifold with a specified layout)

Connector assembly order no. (Can be used for the manifold with a specified layout)								
Model	Part no.		Connector mounting position					
	SY3000-37-80A-3	For A side	For 1 to 8 stations					
SS5Y3-20SA	SY3000-37-80A-6	For B side	FOI 1 to 6 stations					
33313-203A	SY3000-37-80A-4	For A side	For 9 to 16 stations					
	SY3000-37-80A-7	For B side	FOI 9 to 16 stations					
	SY3000-37-80A-3	For A side	For 1 to 8 stations					
SS5Y5-20SA	SY3000-37-80A-6	For B side	FOI 1 to 6 stations					
33313-203A	SY3000-37-80A-7	For A side	For O to 10 stations					
	SY3000-37-80A-9	For B side	For 9 to 16 stations					
	SY3000-37-80A-4	For A side	For 1 to 8 stations					
SS5Y7-20SA	SY3000-37-80A-7	For B side	FOI 1 to 6 stations					
55517-205A	SY3000-37-80A-8	For A side	For 9 to 16 stations					
	SY3000-37-80A-11	For B side	For 9 to 16 stations					
	SY3000-37-80A-6	For A side	For 1 to 8 stations					
	SY3000-37-80A-11	For B side	FOI 1 to 6 stations					
CCEVO 22CA	SY3000-37-80A-9	For A side	For 0 to 10 stations					
SS5Y9-23SA	SY3000-37-80A-14	For B side	For 9 to 12 stations					
	SY3000-37-80A-13	For A side	For 13 to 16 stations					
	SY3000-37-80A-18	For B side	FOI 13 to 16 Stations					

Note 1) The above is for station addition or maintenance. When ordering a connector assembly separately, a number will not be printed on the connector.



Note 2) After inserting the connector assembly into the housing, be sure to confirm that the lead wire will not come off by lightly pulling the wire. Furthermore, do not reuse the lead wire after it has been inserted and removed.

Note 3) Wiring is set longer than the actual wiring distance.



Manifold Option

■SUP blocking disk (For SY9000)

By installing a SUP blocking disk in the pressure supply passage of a manifold valve, it is possible to supply two or more different high and low pressures to one manifold.



Series	No.				
SY9000	SY9000-61-2A				

■ EXH blocking disk (For SY9000)

By installing an EXH blocking disk in the exhaust passage of a manifold valve, it is possible to divide the valve's exhaust so that it does not affect another valve. (Two blocking disks are needed to divide both exhausts.)



Series	No.				
SY9000	SY9000-61-2A				

■ Label for blocking disk (For SY9000)

The labels shown below are used on manifold stations containing SUP/EXH blocking disk(s) to show their location. (3 pcs. each)

VZ3000-123-1A

Label for SUP block disk Label for EXH block disk Label for SUP/EXH block disk








* When a block disk is concurrently ordered by specifying on the manifold specification sheet, etc., a label will be stuck on the position where block disk is mounted.

■ DIN Rail Dimensions/Weight for SY9000



* Fill in □ with an appropriate no. listed on the table of DIN rail dimensions shown below.

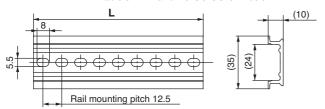


No.	0	1	2	3	4	5	6	7	8	9
L Dimension	98	110.5	123	135.5	148	160.5	173	185.5	198	210.5
Weight (g)	24.8	28	31.1	34.3	37.4	40.6	43.8	46.9	50.1	53.3
No.	10	11	12	13	14	15	16	17	18	19
L Dimension	223	235.5	248	260.5	273	285.5	298	310.5	323	335.5
Weight (g)	56.4	59.6	62.7	65.9	69.1	72.2	75.4	78.6	81.7	84.9
No.	20	21	22	23	24	25	26	27	28	29
L Dimension	348	360.5	373	385.5	398	410.5	423	435.5	448	460.5
Weight (g)	88	91.2	94.4	97.5	100.7	103.9	107	110.2	113.3	116.5
No.	30	31	32	33	34	35	36	37	38	
L Dimension	473	485.5	498	510.5	523	535.5	548	560.5	573	
Weight (a)	119.7	122.8	126	129.2	132.3	135.5	138.6	141.8	145	

Note) · For DIN rail, refer to page 229.

·Refer to L1 dimension on page 55 for lengths that correspond to the number of manifold stations.

■ Cable assembly (For 20P, 23P) AXT100-FC26-2

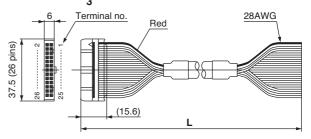

Flat ribbon cable connector

Cabla lanath (I)	Assembly part no.
Cable length (L)	26 pins
1.5 m	AXT100-FC26-1
3 m	AXT100-FC26-2
5 m	AXT100-FC26-3


- * When using a standard commercial connector, use a 26-pin type connector conforming to MIL-C-83503 with strain relief.
- * Cannot be used for movable wiring
- \ast Lengths other than the above are also available. Please contact SMC for details.

Connector Manufacturers' Example

- HIROSE ELECTRIC CO., LTD.
- 3M Japan Limited
- Fujitsu Limited
- Japan Aviation Electronics Industry, Limited
- J.S.T. Mfg. Co., Ltd.
- · Oki Electric Cable Co., Ltd.

■ Plug

These are inserted in unused cylinder ports and SUP, EXH ports. Note) Purchasing order is available in units of 10 pieces.



Dimensions

Applicable fittings size ød	Model	Α	L	D
4	KQ2P-04	16	32	6
6	KQ2P-06	18	35	8
8	KQ2P-08	20.5	39	10
10	KQ2P-10	22	43	12
12	KQ2P-12	24	44.5	14
1/8"	KQ2P-01	16	31.5	5
5/32"	KQ2P-03	16	32	6
1/4"	KQ2P-07	18	35	8.5
5/16"	KQ2P-09	20.5	39	10
3/8"	KQ2P-11	22	43	11.5

How to Increase Manifold Bases (Series SY9000 only) Manifold case can be added at any location.

When a type 23 manifold base is added, tension bolts as well as manifold block assembly will be required. Order the tension bolt suitable for the stations after a station was increased (decreased), since the length of a tension bolt differs by the number of stations. (For changing the number of stations for a type 23P manifold, wiring unit for the stations and lead assembly will be required.)

- Loosen the tension bolts ⑤ connecting the manifold base, and pull out both of 2 tension bolts.
 - (When equipped with a DIN rail, loosen one DIN rail holding screw on either U side or D side.)
- Separate the blocks at the location where station expansion is desired.
- 3 Mount additional manifold block assembly.
- Press block-to-block so that there's no gap. After connection, insert a tension bold for desired stations and then tighten it.


^ Caution (Tightening torque: 2.9 N⋅m)

(When equipped with a DIN rail, be sure to tighten the DIN rail holding screws after tightening the tension bolts. Tightening torque: 1.4 N·m)

∕!\ Caution

- 1. Be sure to shut off the power and air supplies before disassembly. Furthermore, since air may remain inside the actuator, piping and manifold, confirm that the air is completely exhausted before performing any work.
- 2. When disassembly and assembly are performed, air leakage may result if connections between blocks and tightening of the end block's holding screw, is inadequate.
- 3. By adding wiring unit assembly to type 23 manifold, it can be changed to type 23P manifold, too.


Body Ported Manifold Exploded View, 23/23P Common

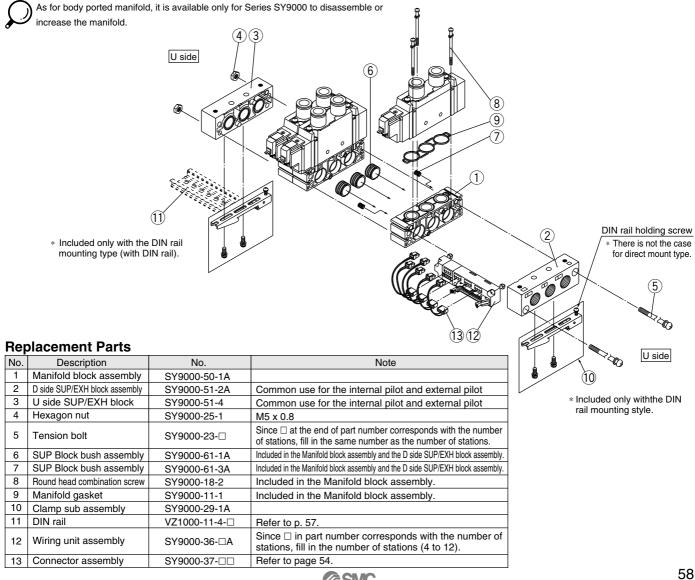




5 Port Solenoid Valve Series SY3000/5000/7000 Body Ported Cassette Type



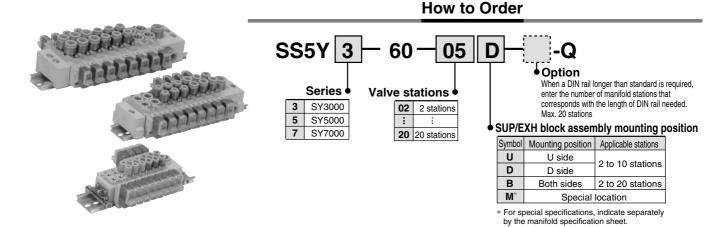

How to Order Valve Manifold Assembly (Example)

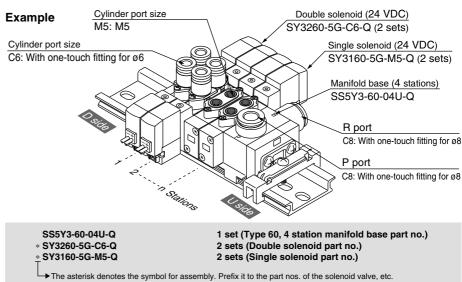

→ The asterisk denotes the symbol for assembly. Prefix it to the part nos. of the solenoid vaive, etc.
Add the valve and option part number under the manifold base part number. In the case of complex arrangement, specify them on the manifold specification sheet.

SY3000/5000/7000 Body Ported Type 60

Manifold Specifications

Model		SS5Y3-60	SS5Y5-60	SS5Y7-60		
Applicable valve		SY3□60	SY5□60	SY7□60		
Manifold type			Stacking type/DIN rail mounted			
P (SUP)/R (EXH)		Common SUP/Common EXH			
Valve stations			2 to 20 stations Note 1)			
A, B port location	١	Valve				
•	P, R port	C8 (One-touch fitting for ø8)	C10 (One-touch fitting for ø10)	C12 (One-touch fitting for ø12)		
Port size	A, B port	M5 C4(One-touch fitting for ø4) C6 (One-touch fitting for ø6)	1/8 C4 (One-touch fitting for ø4) C6 (One-touch fitting for ø6) C8 (One-touch fitting for ø8)	1/4 C8 (One-touch fitting for Ø8) C10 (One-touch fitting for Ø10)		
Manifold base weight W (g) ^{Note 2)} (n: Number of SUP/EXH blocks, m: Weight of DIN rail)		W = 13n + m + 36	W = 41.2n + m + 77.6	W = 65.4n + m + 128.2		



Note 1) In cases such as those where many valves are operated simultaneously, use "-[station]B (SUP/EXH block on both sides)" (both sides SUP/EXH), applying pressure to the P ports on both sides and exhausting from the R ports on both sides. Note 2) For DIN rail weight, refer to page 67.

Flow Characteristics

	Port size		Flow characteristics							
Model	1,5/3	4,2		$1 \rightarrow 4/2$	$2(P \rightarrow A/$	(B)	$4/2 \rightarrow 5/3(A/B \rightarrow R)$			
	(P,R)	(A,B)	C (dm ³ /(s·bar))	b	Cv	Q[e/min(ANR)]*	C (dm3/(s.bar))	b	Cv	Q[e/min(ANR)]*
		M5	0.55	0.29	0.14	139	0.72	0.24	0.18	176
SS5Y3-60	C8	C4	0.57	0.24	0.14	140	0.71	0.20	0.17	170
		C6	0.68	0.28	0.17	171	0.77	0.24	0.19	189
		1/8	1.8	0.24	0.44	441	2.1	0.17	0.47	495
SS5Y5-60	C10	C6	1.5	0.30	0.37	381	2.0	0.16	0.46	469
		C8	1.8	0.20	0.45	431	2.2	0.17	0.50	518
SS5Y7-60		1/4	3.7	0.25	0.96	912	3.8	0.19	0.94	905
	C12	C8	3.2	0.26	0.81	794	4.0	0.18	0.96	947
		C10	3.7	0.28	0.98	929	4.1	0.19	1.0	977



Note) The value is for manifold base with 5 stations and individually operated 2 position type.




^{*} These values have been calculated according to ISO6358 and represent the flow rate measured in standard conditions at an upstream pressure of 0.6 MPa (relative pressure) and a differential $\,$ pressure of 0.1MPa.



How to Order Valve



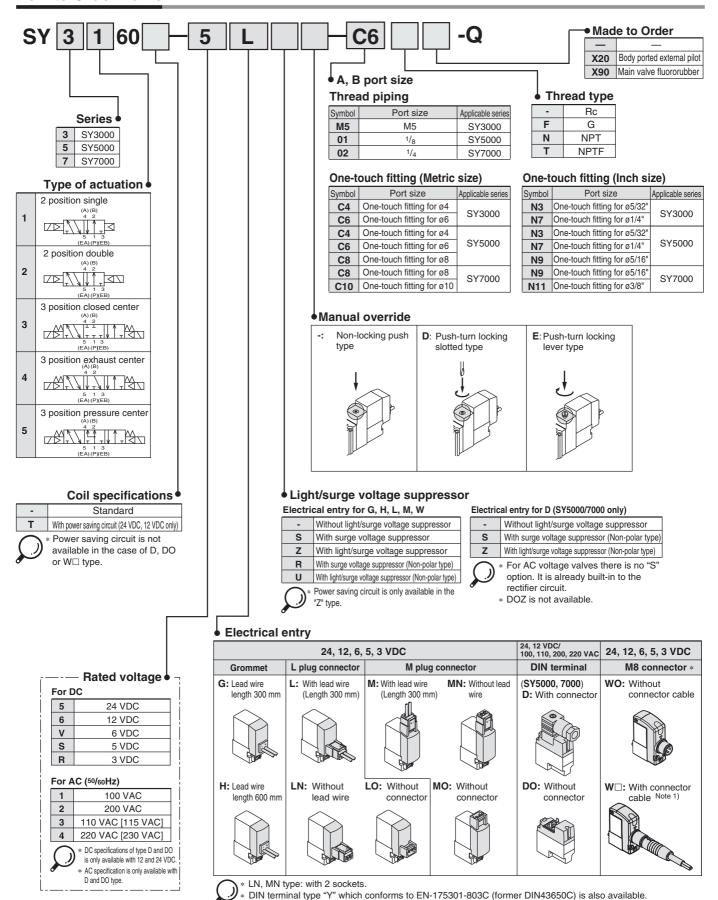



* For connector cable of M8 connector, refer to page 230.

* Connector M8 type "WA" conforming to IEC 60947-5-2 standard, is also available. For details, see page 211.

Note 1) Enter the cable length symbols in □. Please be sure to fill in the blank referring to page 231.

For details, refer to page 227.

SY3000/5000/7000 Body Ported Type



Specifications

Series		SY3000	SY5000	SY7000			
Fluid			Air				
Internal pilot	2 position single	0.15 to 0.7					
Operating pressure	2 position double		0.1 to 0.7				
range (MPa)	3 position		0.2 to 0.7				
Ambient and flu	id temperature (°C)		Max. 50				
Max. operating	2 position double	10	5	5			
frequency (Hz)		3	3	3			
Manual over (Manual ope		Non-locking push type, Push-turn locking slotted type, Push-turn locking lever type					
Pilot exhaus	t method	Common exhaust type for main and pilot valve					
Lubrication	-	Not required					
Mounting po	sition	Unrestricted					
Impact/Vibratio	n resistance ^{Note)}	150/30					
Enclosure		Dust proof (* DIN terminal, M8 connector: IP65)					

Note) Impact resistance: No malfunction occurred when it is tested in the axial direction and at the right angles to the main valve and armature in both energised and de-energised states every once for each condition.

Vibration resistance: No malfunction occurred in a one-sweep test between 45 and 2000 Hz.

Test was performed at both energised and deenergised states in the axial direction and at the right angles to the main valve and armature. (Values in the initial stage)

* Based on IEC60529

Solenoid Specifications

Electrical entry			Grommet (G), (H) L plug connector (L) M plug connector (M) DIN terminal (D) M8 connector (W)		
0-11	DO	`	G, H, L, M, W 24, 12, 6, 5, 3	D 24, 12	
Coil rated voltage (V)		C ⁵⁰ / ₆₀ Hz	100, 110	200, 220	
Allowable volt	l		±10% of rat	· ·	
Power	DC	Standard	0.35 [With indicator light: 0.4 (DIN terminal with indicator light: 0.45)]		
consumption (W)		With power saving circuit	0.1 (With indicator light only)		
		100 V	-	0.78 (With indicator light: 0.87)	
Apparent		110 V [115 V]	-	0.86 (With indicator light: 0.97) [0.94 (With indicator light: 1.07)]	
power (VA) *	AC	200 V	-	1.15 (With indicator light: 1.30)	
		220 V [230 V]	- -	1.27 (With indicator light: 1.46) [1.39 (With indicator light: 1.60)]	
Surge voltage	e sup	pressor	Diode (Varistor is for DIN terminal and non-polar)		
Indicator ligh	t		LED (AC of DIN connector is neon light.)		



- In common between 110 VAC and 115 VAC, and between 220 VAC and 230 VAC.
- For 115 VAC and 230 VAC, the allowable voltage is -15% to +5% of rated voltage.
- S, Z and T type (with power saving circuit) should be used within the following allowable voltage fluctuation range due to a voltage drop caused by the internal circuit.

S and Z type: 24 VDC: -7% to +10% 12 VDC: -4% to +10% T type: 24 VDC: -8% to +10% 12 VDC: -6% to +10%

Response Time



Note) Based on dynamic performance test, JIS B 8375-1981. (Coil temperature: 20°C, at rated voltage)

SY3000

Type of actuation	Response time (ms) (at the pressure of 0.5 MPa)					
	Without surge voltage	With surge voltage suppressor				
	suppressor	S, Z type	R, U type			
2 position single	12 or less	15 or less	12 or less			
2 position double	10 or less	13 or less	10 or less			
3 position	15 or less	20 or less	16 or less			

SY5000

Type of actuation	Response time (r	Response time (ms) (at the pressure of 0.5 MPa)					
	Without surge voltage	With surge voltage suppressor					
	suppressor	S, Z type	R, U type				
2 position single	19 or less	26 or less	19 or less				
2 position double	18 or less	22 or less	18 or less				
3 position	32 or less	38 or less	32 or less				

SY7000

	Type of actuation	Response time (ms) (at the pressure of 0.5 MPa)				
		Without light/surge	With light/surge voltage suppressor			
		voltage suppressor	S, Z type	R, U type		
	2 position single	31 or less	38 or less	33 or less		
	2 position double	27 or less	30 or less	28 or less		
	3 position	50 or less	56 or less	50 or less		



Type 60 Body Ported

Weight

Series SY3000

	Type of actuation		Port size	Weight (g)				
Valve model			A, B	Gro- mmet	L/M plug connector	M8 Connector		
	2	Single		49	51	55		
	position	Double		70	73	81		
SY3□60-□-M5		Closed center	M5					
	3 position	Exhaust center		73	76	84		
	position	Pressure center	1					
	2 position	Single		62	61	65		
		Double	C4 [80	83	91		
SY3□60-□-C4	3 position	Closed center	One-touch (fitting for ø4)	82	86			
		Exhaust center				94		
	position	Pressure center						
	2	Single		55	57	61		
	position	Double	C6	76	79	87		
SY3□60-□-C6		Closed center	/ One-touch \					
	3 position	Exhaust center	fitting for ø6	78	82	90		
	position	Pressure center						
Note) []: denotes normal position.								



Series SY5000

	Type of actuation		Port size		Weigh	nt (g)	
Valve model			A, B	Gro- mmet	L/M plug connector	DIN terminal	M8 Conne- ctor
	2	Single		67	69	90	71
	position	Double		91	94	136	102
SY5□60-□-01		Closed center	1/8				
	position	Exhaust center		97	100	142	108
	p comen	Pressure center					
	I position I	Single		91	93	114	97
		Double	C4 (One-touch (fitting for ø4)	113	116	158	124
SY5□60-□-C4	3 position	Closed center					
		Exhaust center		119	122	164	130
		Pressure center					
	2	Single		86	88	109	92
	position	Double	C6	108	111	153	119
SY5□60-□-C6		Closed center	One-touch				
	3	Exhaust center	fitting for ø6	114	117	159	125
	position	Pressure center					
	2	Single		78	80	101	84
	position	Double	C8	100	103	145	111
SY5□60-□-C8		Closed center	/ One-touch \				
	3 position	Exhaust center	(fitting for ø8)	106	109	151	117
	position	Pressure center					

Series SY7000


			Port size		Weigh	nt (g)	
Valve model	Тур	e of actuation	A, B	Gro- mmet	L/M plug connector	DIN terminal	M8 Conne- ctor
	2	Single		103	105	126	109
	position	Double		125	128	170	136
SY7□60-□-02		Closed center	1/4				
	3 position	Exhaust center		133	136	178	144
	position	Pressure center					
	2 position	Single	C8	138	139	160	143
		Double		160	163	205	171
SY7□60-□-C8	_	Closed center	(One-touch				
	3 position	Exhaust center	fitting for ø8	168	171	213	179
	position	Pressure center					
	2	Single		123	125	146	129
SY7□60-□-C10	position	Double	C10	145	149	191	157
		Closed center	/ One-touch \				
	3 nosition	Exhaust center	(fitting for ø10)	153	157	199	165
	position	Pressure center					





Manifold Option


■ Individual SUP block assembly

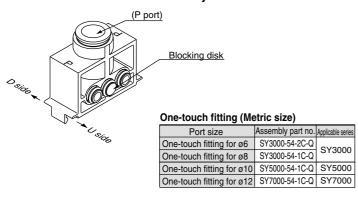

One-touch fitting (Inch size)

Port size	Assembly part no.	Applicable series
One-touch fitting for ø5/16"	SY3000-54-3C-Q	SY3000
One-touch fitting for ø3/8"	SY5000-54-2C-Q	SY5000
One-touch fitting for ø3/8"	SY7000-54-3C-Q	SY7000

■ Individual EXH block assembly

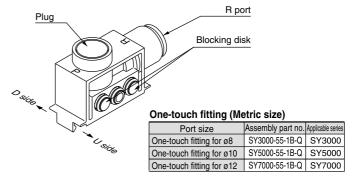


One-touch fitting (Inch size)

<u> </u>	· · · /	
Port size	Assembly part no.	Applicable series
One-touch fitting for ø5/16"	SY3000-55-2B-Q	SY3000
One-touch fitting for ø3/8"	SY5000-55-2B-Q	SY5000
One-touch fitting for ø3/8"	SY7000-55-3B-Q	SY7000

[When supplying the manifold with 2 different supply pressures.]

Specify arrangement of individual SUP block assembly on the manifold specification sheet. (When using SS5Y□-60-□□D, blocking disk is assembled on D side.)


<Manifold model no.: SS5Y₅³-60-□□ U_D>

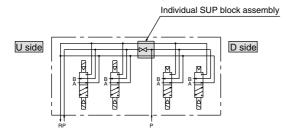

[When 2 different EXH passages are required.]

Specify arrangement of individual EXH block assembly on the manifold specification sheet. (When using SS5Y□-60-□□D, blocking disk is assembled on D side.)


<Manifold model no.: SS5Y₅³-60-□□_D^U>

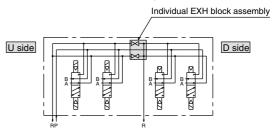

[When a different supply pressure is required for only a middle valve.]

Specify arrangement of individual SUP block assembly and SUP blocking disk on the manifold specification sheet.


(Applicable manifold model no.: SS5Y□-60-□□B)

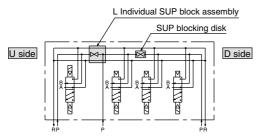

[When a separate exhaust passage is needed on only a middle valve.]

Specify arrangement of individual EXH block assembly and EXH blocking disk on the manifold specification sheet.

(Applicable manifold model no.: SS5Y□-60-□□B)

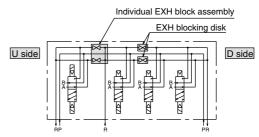



Manifold Option

■ SUP blocking disk

By installing a SUP blocking disk in the pressure supply passage of a manifold valve, it is possible to supply two or more different high and low pressures to one manifold. (This is the same block disk used with the individual SUP block assembly.)



Series	No.
SY3000	SY3000-52-6A
SY5000	SY5000-52-4A
SY7000	SY7000-70-2A

■ EXH blocking disk

By installing an EXH blocking disk in the exhaust passage of a manifold valve, it is possible to divide the valve's exhaust so that it does not affect another valve. (Two blocking disks are needed to separate both EXH passages. It is the same block disk that is used in the individual EXH block assembly.)



Series	No.
SY3000	SY3000-52-6A
SY5000	SY5000-52-4A
SY7000	SY7000-70-2A

■ Label for block disk

The labels shown below are used on manifold stations containing SUP/EXH blocking disk(s) to show their location. (3 pcs. each)

VZ3000-123-1A


Label for SUP block disk Label for EXH block disk Label for SUP/EXH block disk








* When a block disk is concurrently ordered by specifying on the manifold specification sheet, etc., a label will be stuck on the position where block disk is mounted.

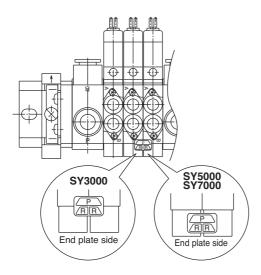

■ Silencer with One-touch fitting


The silencer plugs directly into the One-touch fittings of the manifold.



Series	Model	Effective area	Α	В	С
SY3000 (for ø8)	AN203-KM8	14 mm ²	ø16	26	51
SY5000 (for ø10)	AN200-KM10	26 mm ²	ø22	54	80.8
313000 (lot Ø10)	AN300-KM10	30 mm ²	ø25	70	97
SY7000 (for ø12)	AN300-KM12	41 mm ²	ø25	70	98

■ Plug

These are inserted in unused cylinder ports and SUP, EXH ports.



Dimensions


Applicable fittings size ød	Model	Α	L	D
4	KQ2P-04	16	32	6
6	KQ2P-06	18	35	8
8	KQ2P-08	20.5	39	10
10	KQ2P-10	22	43	12
12	KQ2P-12	24	45.5	14
5/32"	KQ2P-03	16	32	6
1/4"	KQ2P-07	18	35	8.5
5/16"	KQ2P-09	20.5	39	10
3/8"	KQ2P-11	22	43	11.5

■ DIN Rail Dimensions/Weight for SY3000/5000

VZ1000-11-1-

Refer to the L dimension tables

* Enter a number from the DIN rail dimension table below in them.

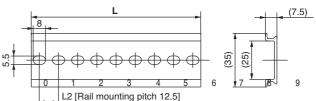

No.	0	1	2	3	4	5	6	7	8	9
L dimension	98	110.5	123	135.5	148	160.5	173	185.5	198	210.5
Weight (g)	17.6	19.9	22.1	24.4	26.6	28.9	31.1	33.4	35.6	37.9
No.	10	11	12	13	14	15	16	17	18	19
L dimension	223	235.5	248	260.5	273	285.5	298	310.5	323	335.5
Weight (g)	40.1	42.4	44.6	46.9	49.1	51.4	53.6	55.9	58.1	60.4
No.	20	21	22	23	24	25	26	27	28	29
L dimension	348	360.5	373	385.5	398	410.5	423	435.5	448	460.5
Weight (g)	62.6	64.9	67.1	69.4	71.6	73.9	76.1	78.4	80.6	82.9


■ DIN Rail Dimensions/Weight for SY7000

VZ1000-11-4-

No

• Refer to the L dimension tables

* Enter a number from the DIN rail dimension table below in them.

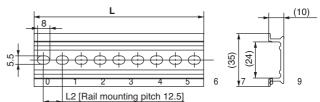

INU.	0		7	0	Ŧ	,	0	'		
L dimension	98	110.5	123	135.5	148	160.5	173	185.5	198	210.5
Weight (g)	24.8	28	31.1	34.3	37.4	40.6	43.8	46.9	50.1	53.3
No.	10	11	12	13	14	15	16	17	18	19
No. L dimension	-	11 235.5	12 248	13 260.5	14 273	15 285.5	16 298	17 310.5	-	19 335.5

0 1 2 3 4 5 6 7 8 9

No.	20	21	22	23	24	25	26	27	28	29
L dimension	348	360.5	373	385.5	398	410.5	423	435.5	448	460.5
Weight (g)	88	91.2	94.4	97.5	100.7	103.9	107	110.2	113.3	116.5


Note) For DIN rail mounting, refer to page 229.




Construction

Series SY


JIS Symbol




2 position single

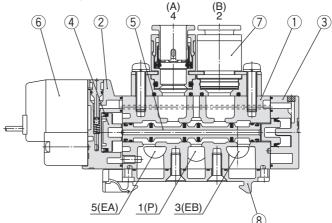


JIS Symbol



2 position double

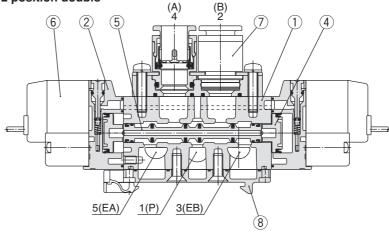


JIS Symbol



5 1 3 (EA) (P)(EB)

3 position closed center / exhaust center / pressure center

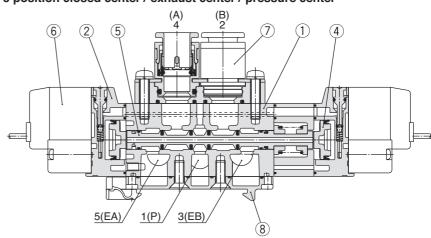

(This figure shows a closed center type.)

Component Parts

	<u> </u>			
No.	Description	Note		
1	Body	Body Aluminum die-casted SY3000: Zinc die-casted		
2	Adapter plate	Adapter plate Resin		
3	End plate Resin		White	
4	Piston	Resin	_	
5	Spool valve assembly	_		

Replacement Parts

No.	Description No.						
6	Pilot valve assembly	Refer to "How to Order Pilot Valve Assembly" on page 218.					
7	Port block assembly	Refer to "How to Order Port Block Assembly" on page 218.					
0	Bottom cover	SY3000-41-2A (with screw, gasket)					
0	assembly Note)	SY5000-41-2A (with screw, gasket)					

Note) There is no bottom cover assembly available for SY7000.





Type 60 Body Ported


Dimensions

SS5Y3-60- Stations U-Q

,	Stations	2 stations	3	4	5	6	7	8	9	10 stations
	L1	98	110.5	123	135.5	135.5	148	160.5	173	185.5
	L2	87.5	100	112.5	125	125	137.5	150	162.5	175
	L3	69.5	80	90.5	101	111.5	122	132.5	143	153.5
ĺ	L4	14	15	16	17	12	13	14	15	16

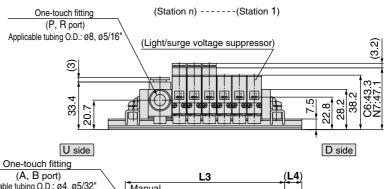





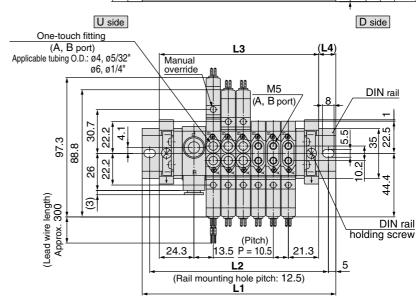

SS5Y3-60-Stations D-Q

Stations	2 stations	3	4	5	6	7	8	9	10 stations
L1	98	110.5	123	135.5	135.5	148	160.5	173	185.5
L2	87.5	100	112.5	125	125	137.5	150	162.5	175
L3	69.5	80	90.5	101	111.5	122	132.5	143	153.5
L4	14	15	16	17	12	13	14	15	16

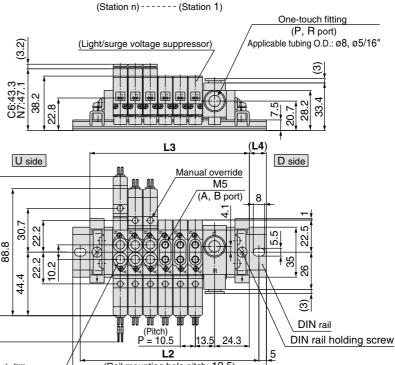


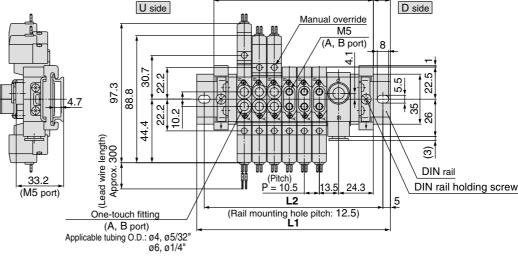


SS5Y3-60-Stations B-Q

Stations	2 stations	3	4	5	6	7	8	9	10 stations
L1	110.5	123	135.5	148	160.5	173	173	185.5	198
L2	100	112.5	125	137.5	150	162.5	162.5	175	187.5
L3	86	96.5	107	117.5	128	138.5	149	159.5	170
	12	13	14	15	16	17	12	13	14


Stations	11 stations	12	13	14	15	16	17	18	19	20 stations
L1	210.5	223	235.5	235.5	248	260.5	273	285.5	298	310.5
L2	200	212.5	225	225	237.5	250	262.5	275	287.5	300
L3	180.5	191	201.5	212	222.5	233	243.5	254	264.5	275
L4	15	16	17	11.5	12.5	13.5	14.5	15.5	16.5	17.5

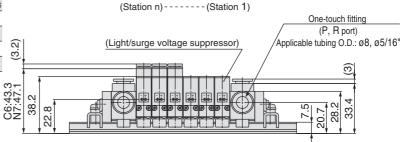

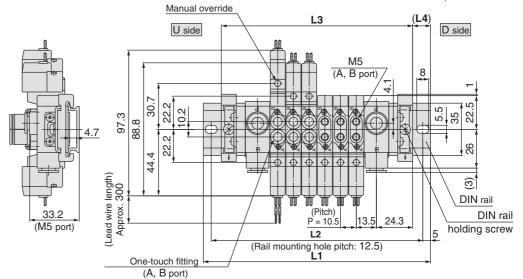


Applicable tubing O.D.: Ø4, Ø5/32" Ø6, Ø1/4"


L plug connector (L)

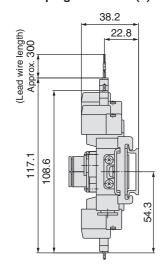

M plug connector (M)



M8 connector (WO)

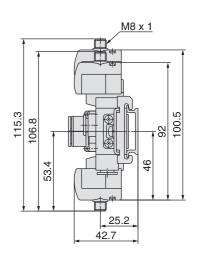

Note) Refer to back page 12 for dimensions of connector types.





Type 60 Body Ported

Dimensions (mm)

SS5Y5-60-Stations U-Q


Stations	2 stations	3	4	5	6	7	8	9	10 stations	
L1	123	135.5	148	160.5	185.5	198	210.5	235.5	248	
L2	112.5	125	137.5	150	175	187.5	200	225	237.5	
L3	88	104	120	136	152	168	184	200	216	
L4	17.5	15.5	14	12	16.5	15	13	17.5	16	

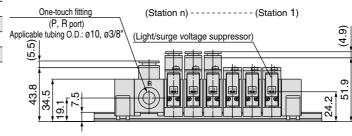


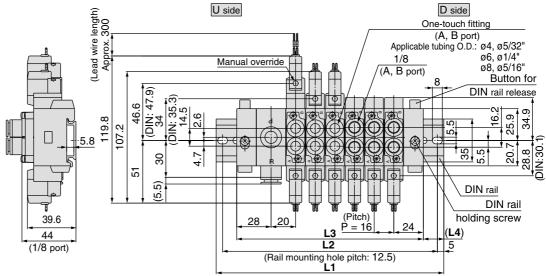


SS5Y5-60-Stations D-Q


Stations	2 stations	3	4	5	6	7	8	9	10 stations
L1	123	135.5	148	160.5	185.5	198	210.5	235.5	248
L2	112.5	125	137.5	150	175	187.5	200	225	237.5
L3	88	104	120	136	152	168	184	200	216
L4	17.5	15.5	14	12	16.5	15	13	17.5	16

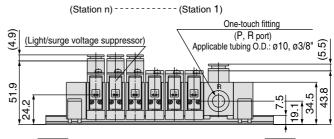

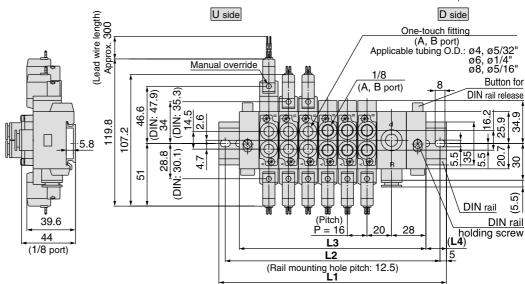

SS5Y5-60-Stations B-Q

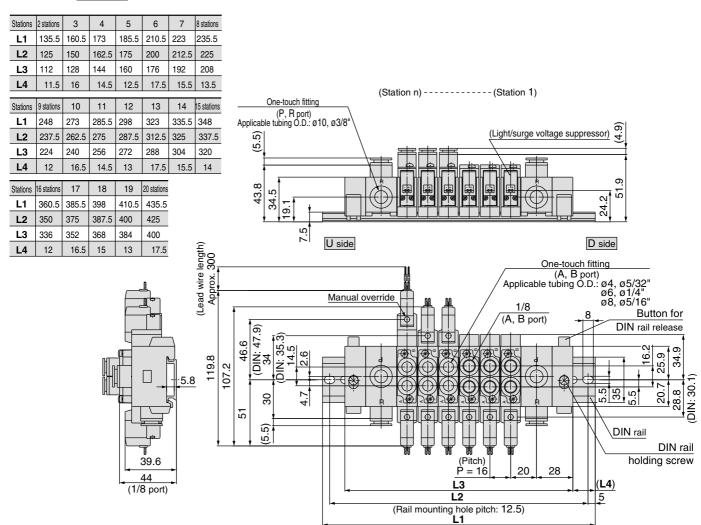

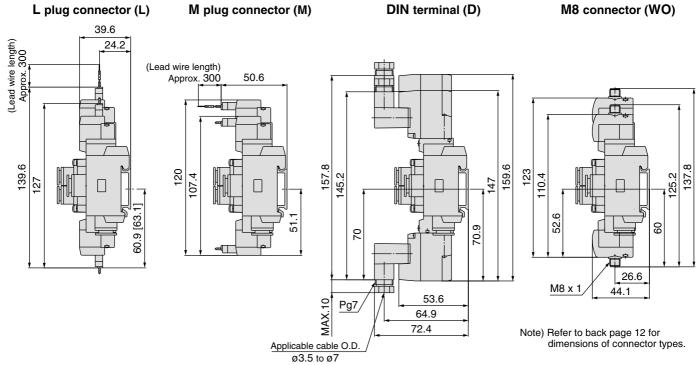


SMC




Dimensions

SS5Y7-60-Stations U-Q


Stations	2 stations	3	4	5	6	7	8	9	10 stations
L1	135.5	148	173	185.5	210.5	223	248	260.5	285.5
L2	125	137.5	162.5	175	200	212.5	237.5	250	275
L3	103	122	141	160	179	198	217	236	255
L4	16	13	16	12.5	15.5	12.5	15.5	12	15

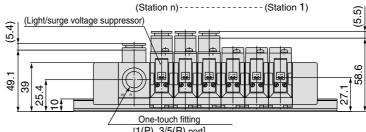


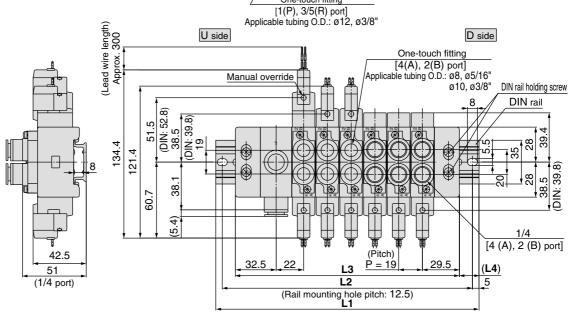


SS5Y7-60-Stations D-Q


Stations	2 stations	3	4	5	6	7	8	9	10 stations
L1	135.5	148	173	185.5	210.5	223	248	260.5	285.5
L2	125	137.5	162.5	175	200	212.5	237.5	250	275
L3	103	122	141	160	179	198	217	236	255
L4	16	13	16	12.5	15.5	12.5	15.5	12	15

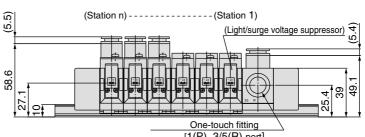

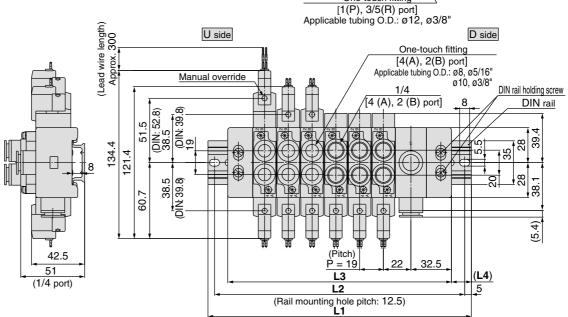

SS5Y7-60-Stations B-Q

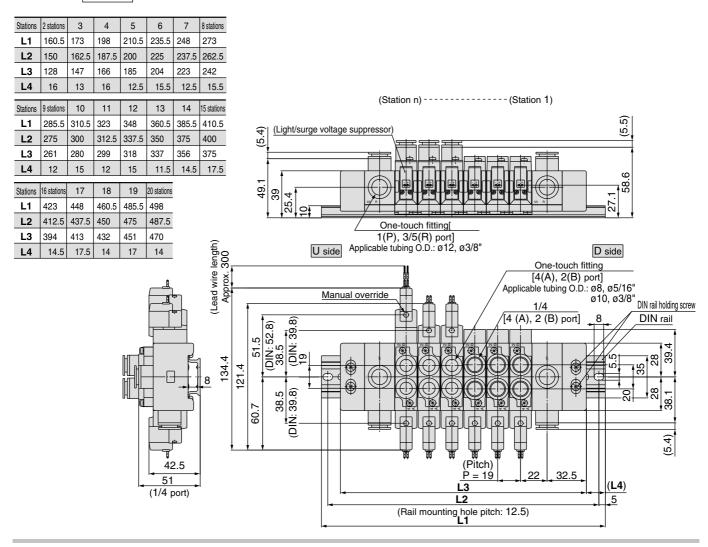

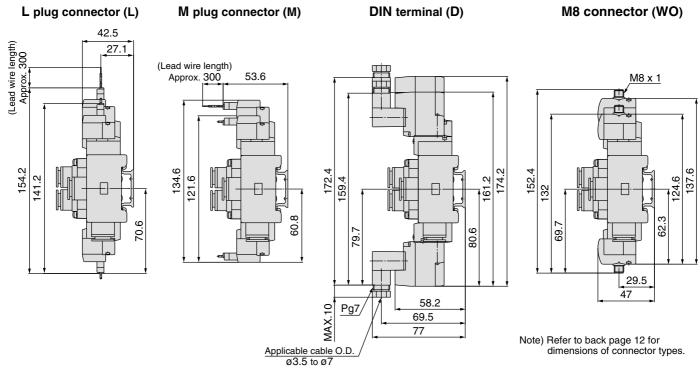


SMC



DIN Rail Manifold Exploded View

SY3000 Type 60

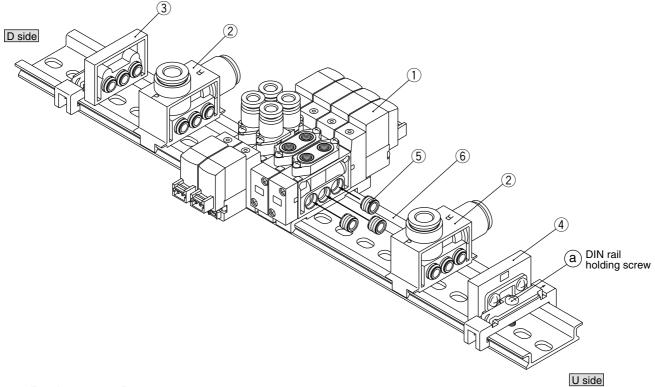


Replacement Parts

<u> </u>	idociniciti i di to						
No.	Description	No.	Note				
1	Valve	SY3□60-□□-□-Q	□ at the end of part number denotes A. B port size: M5, C4, C6, N3, N7. Includes bushing assembly (SY3000-52-5A) 3 pcs.				
2	SUP/EXH block assembly	SY3000-55-1A-Q	P, R port (1: One-touch fitting for ø8, 2: One-touch fitting for ø5/16") Includes bushing assembly (SY3000-52-5A) 3 pcs.				
3	End block assembly	SY3000-56-1A-Q	For D side (Bushing assembly: Not available for SY3000-52-5A)				
4	End block assembly	SY3000-56-1B-Q	For U side (Bushing assembly: Not available for SY3000-52-5A)				
5	Bushing assembly	SY3000-52-5A					
6	DIN rail	VZ1000-11-1-□	Refer to page 67.				

75


SY3000/5000/7000 Body Ported Type 60



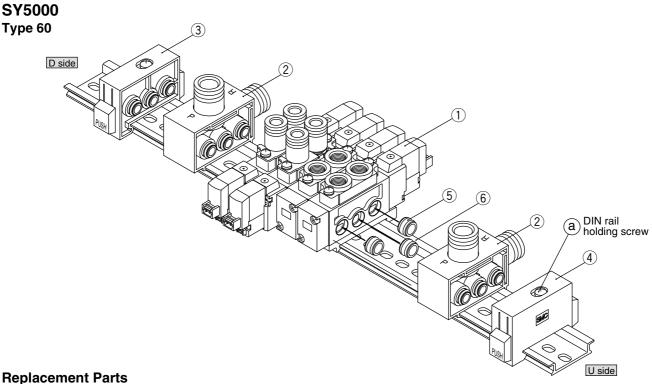

No.	Description	No.	Note
1	Valve	SY5□60-□□-□-Q	\Box at the end of part number denotes A. B port size: 01, C4, C6, C8, N3, N7, N9. Includes bushing assembly (SY5000-52-3A) 3 pcs.
2	SUP/EXH block assembly	SY5000-55-1A-Q	P, R port (1: One-touch fitting for ø10, 2: One-touch fitting for ø3/8") Includes bushing assembly (SY5000-52-3A) 3 pcs.
3	End block assembly	SY5000-56-1A-Q	For D side (Bushing assembly: Not available for SY5000-52-3A)
4	End block assembly	SY5000-56-1B-Q	For U side (Bushing assembly: Not available for SY5000-52-3A)
5	Bushing assembly	SY5000-52-3A	
6	DIN rail	VZ1000-11-1-□	Refer to page 67.

How to Add Additional Valves to the DIN Rail Valves can be added at any station on the rail.

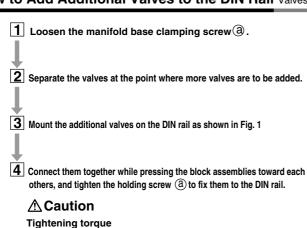


(While lightly holding the blocks after fixing an end block on one side, tighten the other end block for better sealing after no gap between valves is confirmed.)

· Bushing assembly must be seated properly to each valve block in order to prevent air leaks from occurring.

SY3000: 1 N·m SY5000: 1.4 N·m

• Refer to the fig. 2 when dismounting the valve from the DIN rail.

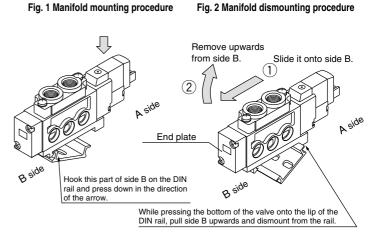

↑ Caution When clamping screw ⓐ of the end block is not sufficiently tightened during reassembly, air leakage may result. Before supplying air, check that there are no gaps between valves and that the end block is firmly secured to the DIN rain in order to ensure air supply without leakage.






DIN Rail Manifold Exploded View

SY7000



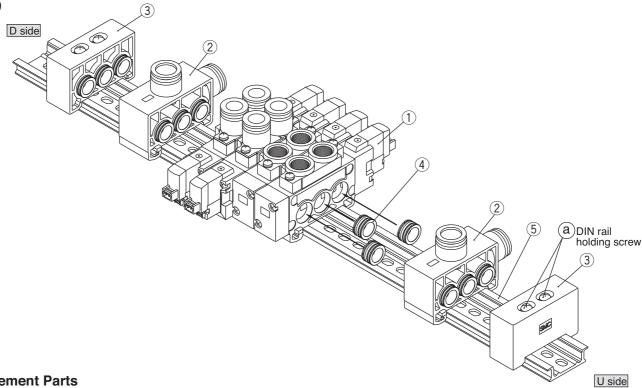

Replacement Parts

No.	Description	No.	Note
1	Valve	SY7□60-□□-□-Q	□ at the end of part number denotes A. B port size: 02, C8, C10, N9, N11. Includes bushing assembly (SY7000-70-1A) 3 pcs.
2	SUP/EXH block assembly	k assembly SY7000-75- 1_3 A-Q P,R port size (1: Ø12 One-touch fitting, 3: 3/8" One-touch fitting) Includes bushing assembley (SY7000-70-1A) 3pcs.	
3	End block assembly	SY7000-56-1A-Q	In common for D side and U side (Bushing assembly: Not available for SY7000-70-1A.)
4	Bushing assembly	SY7000-70-1A	
5	DIN rail	VZ1000-11-4-□	Refer to page 67.

How to Add Additional Valves to the DIN Rail Valves can be added at any station on the rail.

- 1 Loosen the rail holding screw (a) at both of 2 locations which holds the manifold base either in the U side or D side.
 - When removing the end block assembly from the DIN rail, loosen the holding screws for DIN rail at first, then slide it to the edge of the rail.
- 2 Separate the valves at the point where more valves are to be added.
- Mount the additional valves on the DIN rail as shown in Fig. 1.
- 4 Connect them together while pressing the block assemblies toward each others, and tighten the 2 holding screws (a) for DIN rail alternately (2 to 3 times) with the prescribed torque (1.4 N·m) to fix them to the DIN rail.


⚠ Caution

Tightening torque SY7000: 1.4 N·m

(While lightly holding the blocks after fixing an end block on one side, tighten the other end block for better sealing after no gap between valves is confirmed.)

- · Bushing assembly must be seated properly to each valve block in order to prevent air leaks from occurring.
- Refer to the fig. 2 when dismounting the valve from the DIN rail.


Fig. 1 Manifold mounting procedure

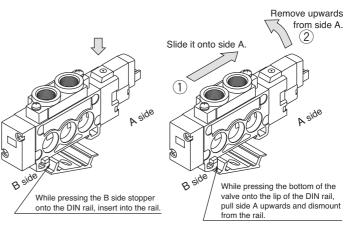

^Caution When clamping screw ⓐ of the end block is not sufficiently tightened during reassembly, air leakage may result. Before supplying air, check that there are no gaps between valves and that the end block is firmly secured to the DIN rain in order to ensure air supply without leakage.

Fig. 2 Manifold dismounting procedure






5 Port Solenoid Valve Series SY3000/5000/7000 Base Mounted

(€ EK

Bar Stock Type/Individual Wiring

How to Order Manifold

How to Order Valve Manifold Assembly (Example)

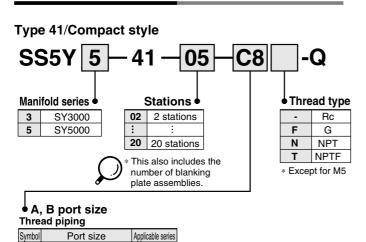

SY3000

SY5000

One-touch fitting (Metric size)

M5

М5


01

0	One todon numg (wetho size)								
Symbol	Port size	Applicable series							
C4	One-touch fitting for ø4	CV2000							
C6	One-touch fitting for ø6	SY3000							
C6	One-touch fitting for ø6	SY5000							
C8	One-touch fitting for ø8	313000							

One-touch fitting (Inch size)

Symbol	Port size	Applicable series
	One-touch fitting for ø 5/32"	SY3000
	One-touch fitting for ø 1/4"	
N7	One-touch fitting for ø 1/4"	SY5000
N9	One-touch fitting for ø5/16"	313000

Type 42/External pilot capable

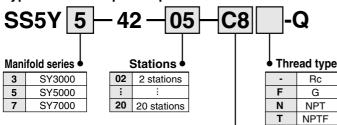

A, B port size


Symbol	Port size	Applicable series
01	1/8	SY3000
02	1/4	SY5000
02	1/4	SY7000

One-touch fitting (Metric size)

0	todon ntang (moan	0.20,
Symbol	Port size	Applicable series
C4	One-touch fitting for ø4	SY3000
C6	One-touch fitting for ø6	513000
C6	One-touch fitting for ø6	CVEOOO
C8	One-touch fitting for ø8	SY5000
C10	One-touch fitting for ø10	SY7000

One-touch fitting (Inch size)


Symbol	Port size	Applicable series
N3	One-touch fitting for ø5/32"	SY3000
N7	One-touch fitting for ø1/4"	313000
N7	One-touch fitting for ø1/4"	SY5000
N9	One-touch fitting for ø5/16"	515000
N11	One-touch fitting for ø3/8"	SY7000

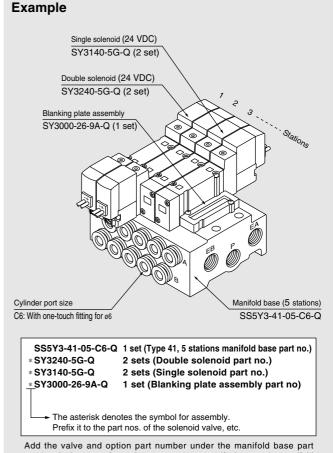

Add the valve and option part number under the manifold base part number. In the case of complex arrangement, specify them on the manifold specification sheet.


How to Order Valve



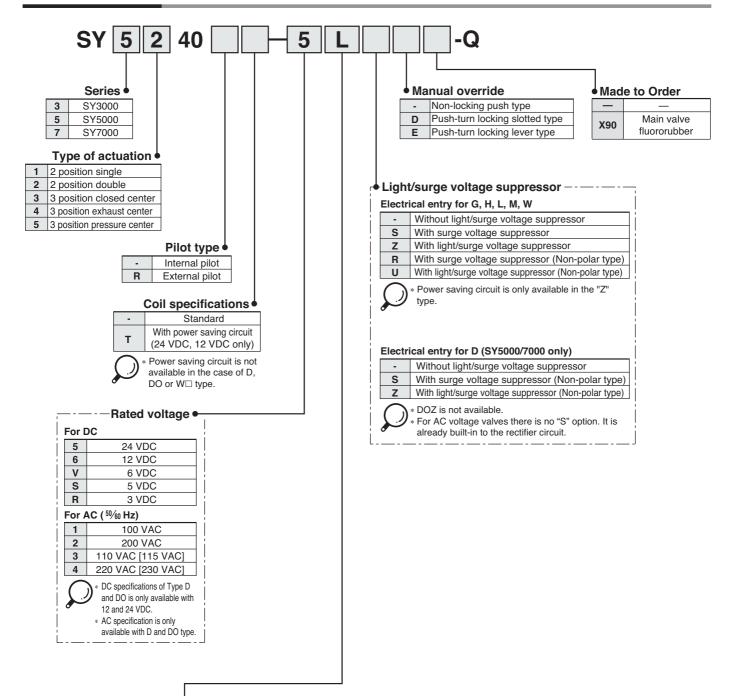

Electrical entry

	24, 12, 6, 5, 3 VDC		24, 12 VDC/ 100, 110, 200, 220 VAC	24, 12, 6, 5, 3 VDC
Grommet	L plug connector	M plug connector	DIN terminal Note2	M8 connector *
G: Lead wire length 300 mm lead H: Lead wire length 600 mm	L: With lead wire (Length 300 mm) LN: Without lead wire LO: Without connector	MN: Without lead wire	D: With connector DO: Without connector	WO: Without connector cable W□: With connector cable Note 1)




* DIN terminal type "Y" which conforms to EN-175301-803C (former DIN43650C) is also available. For details, refer to page 227.

* For connector cable of M8 connector, refer to page 230.

^{*} Connector M8 type "WA" conforming to IEC 60947-5-2 standard, is also available. For details, see page 211. Note 1) Enter the cable length symbols in □. Please be sure to fill in the blank referring to back page 231. Note 2) SY5000/7000 only.



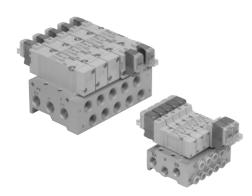

Manifold Specifications


Model			SS5Y3-41	SS5Y3-42	SS5Y5-41	SS5Y5-42	SS5Y7-42
Applica	able	valve	SY3	□40	SY5	□40	SY7□40
Manifo	old ty	ре		Si	ngle base/B mou	ınt	
P(SUP)	/R(E)	(H)		Comm	on SUP, Commo	n EXH	
Valve s	statio	ons		2	to 20 stations Note	e 1)	
A, B po	ort	Location			Base		
Porting speci	ifications	Direction			Side		
	P, E	A, EB port	1/	, 8	1/.	4	1/4
Port size	Α,	B port	M5, C4 (One-touch fitting for ø4) C6 (One-touch fitting for ø6)	1/8 C4 (One-touch fitting for ø4) C6 (One-touch fitting for ø6)	1/8 C6 (One-touch fitting for ø6) C8 (One-touch fitting for ø8)	1/4 C6 (One-touch fitting for ø6) C8 (One-touch fitting for ø8)	1/4 C10 (One-touch fitting for ø10)
Manifold W (g) n: S			W = 30n + 50	W = 37n + 63	W = 61n + 101	W = 79n + 127	W = 100n + 151

Note 1) For more than 10 stations (more than 5 stations in case of SS5Y7), supply pressure to P port on both sides and exhaust from EA/EB port on both sides.

Note 2) Refer to "Manifold Option" on page 109.

Flow Characteristics

	Port	size				Flow char	acteristics			
Model	1, 5, 3	4, 2	1 –	→ 4/2 ·	(P → <i>I</i>	A/B)	4/2 →	5/3 (A/B -	→ EA/EB)
	(P, EA, EB)	(A, B)	C (dm3/ (s-bar))	b	Cv	Q[d/min(ANR)]*	C (dm3/ (s-bar))	b	Cv	Q[d/min(ANR)]*
SS5Y3-41	1/8	C6	0.75 0.19		0.18	179	0.81	0.23	0.20	197
SS5Y3-42	1/8	C6	0.75	0.20	0.18	180	0.82	0.20	0.20	196
SS5Y5-41	1/4	C8	1.8	0.23	0.44	439	1.9	0.16	0.45	445
SS5Y5-42			1.9 0.20		0.46	455	1.9	0.12	0.43	436
SS5Y7-42	1/4	C10	3.0	0.25	0.75	740	3.0	0.12	0.66	688








SY3000: SS5Y3-41- Stations -M5, C4,N3 -Q

Grommet (G)

With interface regulator (with gauge)

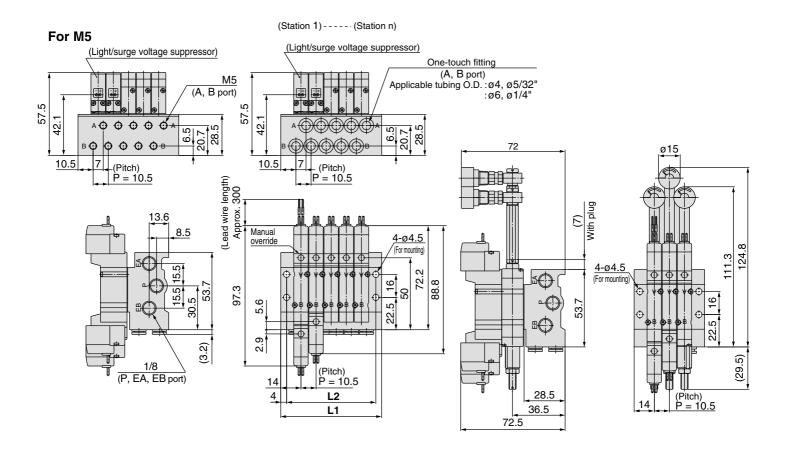

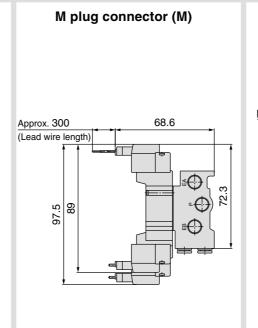



M8 connector (WO)


Note) Refer to back page 12 for dimensions of connector types.


Stations n	2 stations	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20 stations
L1	38.5	49	59.5	70	80.5	91	101.5	112	122.5	133	143.5	154	164.5	175	185.5	196	206.5	217	227.5
L2	30.5	41	51.5	62	72.5	83	93.5	104	114.5	125	135.5	146	156.5	167	177.5	188	198.5	209	219.5

Type 41 Base Mounted

SY5000: SS5Y5-41- Stations -01, C6, N7 ____-Q

Grommet (G)

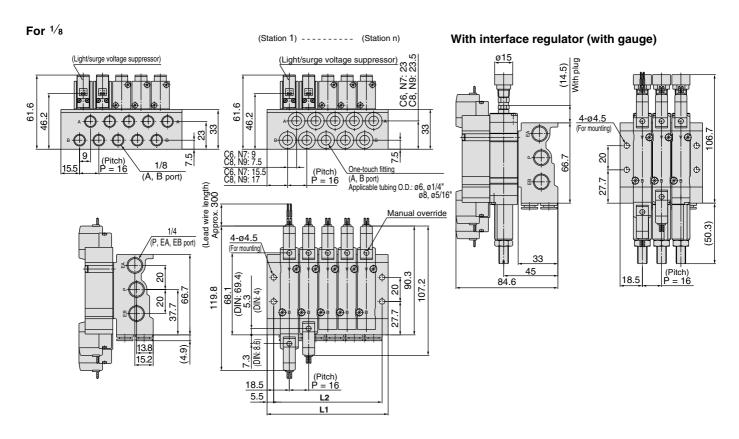

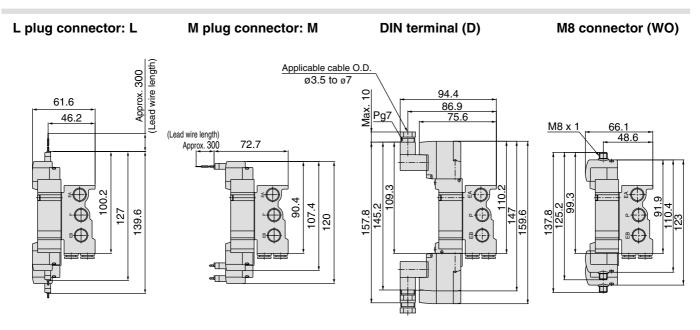



Note) Refer to back page 12 for dimensions of connector types.


Stations n	2 stations	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20 stations
L1	52.5	68.5	84.5	100.5	116.5	132.5	148.5	164.5	180.5	196.5	212.5	228.5	244.5	260.5	276.5	292.5	308.5	324.5	340.5
L2	42	58	74	90	106	122	138	154	170	186	202	218	234	250	266	282	298	314	330

SY3000: SS5Y3-42- Stations - C4, N3 ___-Q

Grommet (G)

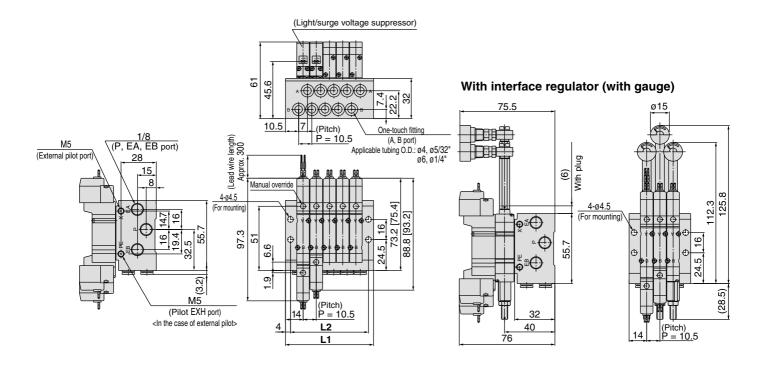

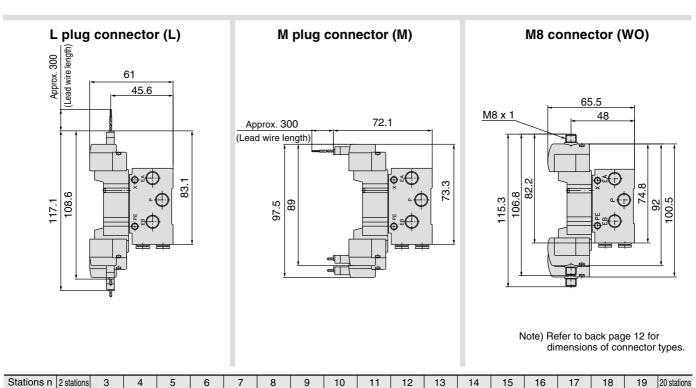




Base Mounted


SY3000: SS5Y3-42-Stations -01

Grommet (G)




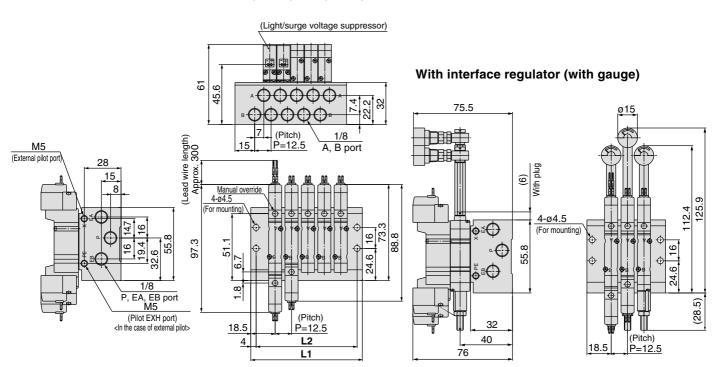


L plug connector (L)

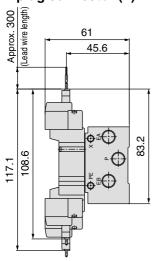

M plug connector (M)

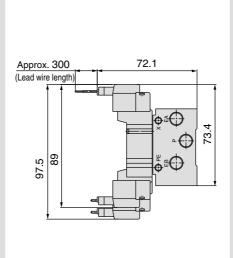

M8 connector (WO)



Note) Refer to back page 12 for dimensions of connector types.


Stations n	2 stations	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20 stations
L1	47.5	60	72.5	85	97.5	110	122.5	135	147.5	160	172.5	185	197.5	210	222.5	235	247.5	260	272.5
L2	39.5	52	64.5	77	89.5	102	114.5	127	139.5	152	164.5	177	189.5	202	214.5	227	239.5	252	264.5






SY5000: SS5Y5-42- Stations -C4, N3 -Q

Grommet (G)

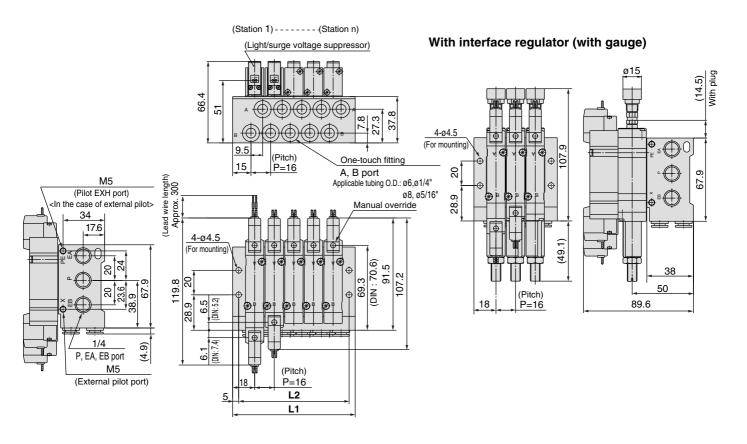

L plug connector (L) M plug connector (M) DIN terminal (D) M8 connector (WO)

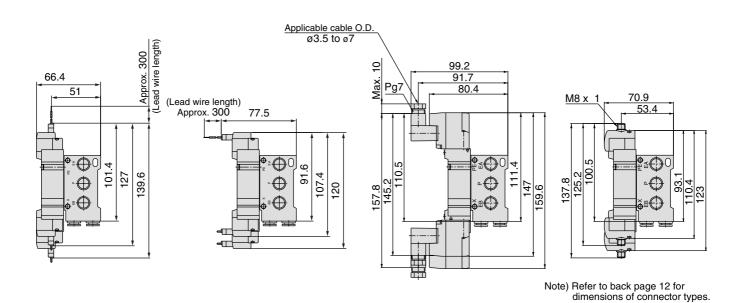


Stations n	2 stations	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20 stations
L1	52	68	84	100	116	132	148	164	180	196	212	228	244	260	276	292	308	324	340
L2	42	58	74	90	106	122	138	154	170	186	202	218	234	250	266	282	298	314	330


Type 42 Base Mounted

SY5000: SS5Y5-42- Stations -02 -Q

Grommet (G)

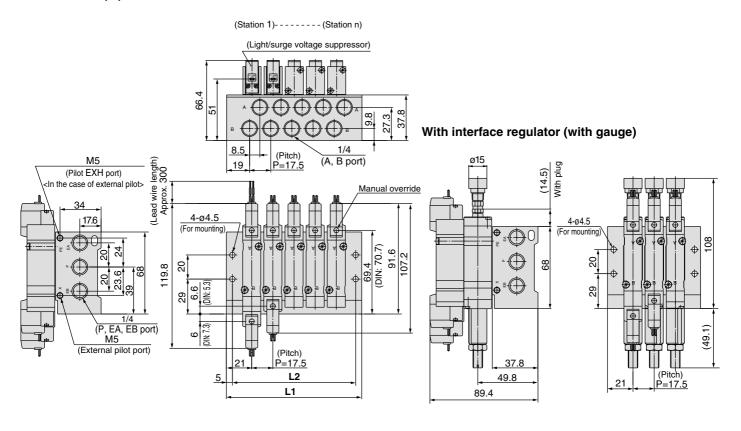

L plug connector (L) M plug connector (M) DIN terminal (D) M8 connector (WO)

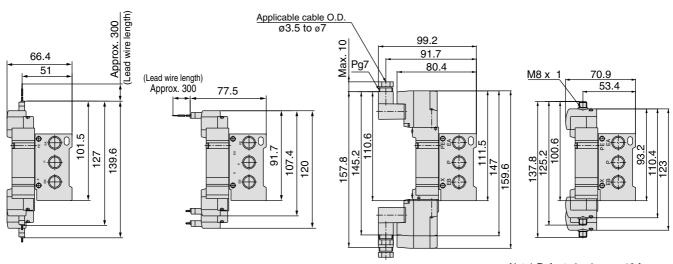



Note) Refer to back page 12 for dimensions of connector types.

Stations n	2 stations	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20 stations
L1	59.5	77	94.5	112	129.5	147	164.5	182	199.5	217	234.5	252	269.5	287	304.5	322	339.5	357	374.5
L2	49.5	67	84.5	102	119.5	137	154.5	172	189.5	207	224.5	242	259.5	277	294.5	312	329.5	347	364.5

SY7000: SS5Y7-42- Stations -02, C10, N11 -Q

Grommet (G)

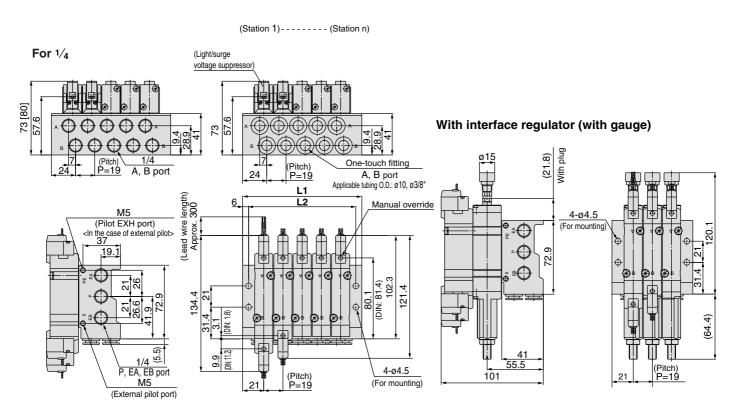

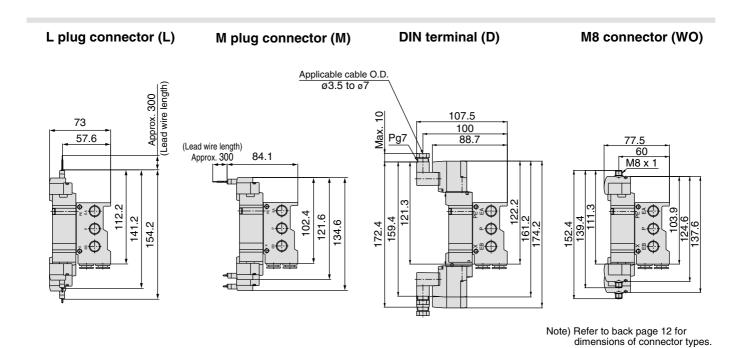

Stations n	2 stations	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20 stations
L1	61	80	99	118	137	156	175	194	213	232	251	270	289	308	327	346	365	384	403
L2	49	68	87	106	125	144	163	182	201	220	239	258	277	296	315	334	353	372	391




5 Port Solenoid Valve Series SY9000 **Base Mounted**



Stacking Type/Individual Wiring


How to Order Manifold

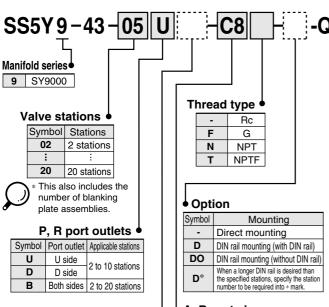

SUP/EXH block assembly specifications

Symbol Specifications						
 Standard/Internal pilot specification 						
R	External pilot specification					
S	Internal pilot/Built-in silencer					
RS	External pilot/Built-in silencer					

How to Order Valve Manifold Assembly (Example)

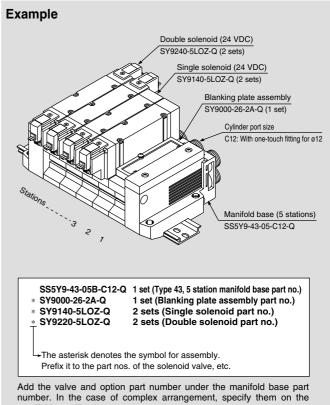

manifold specification sheet.

A, B port size Thread piping

Symbol	Port size							
02	1/4							
03	3/8							
One t	One touch fitting (Metric circ)							

One-touch fitting (Metric size)

Symbol	Port size
C8	One-touch fitting for ø8
C10	One-touch fitting for ø10
C12	One-touch fitting for ø12
M	Mixed

One-touch fitting (Inch size)


Symbol	Port size
N9	One-touch fitting for ø5/16"
N11	One-touch fitting for ø3/8"
M	Mixed

^{*} In the case of mixed specifications (M), indicate separately on the manifold specification sheet.

How to Order Valve

and DO is only available with 12 and 24 VDC. * AC specification is only available with D and DO type.



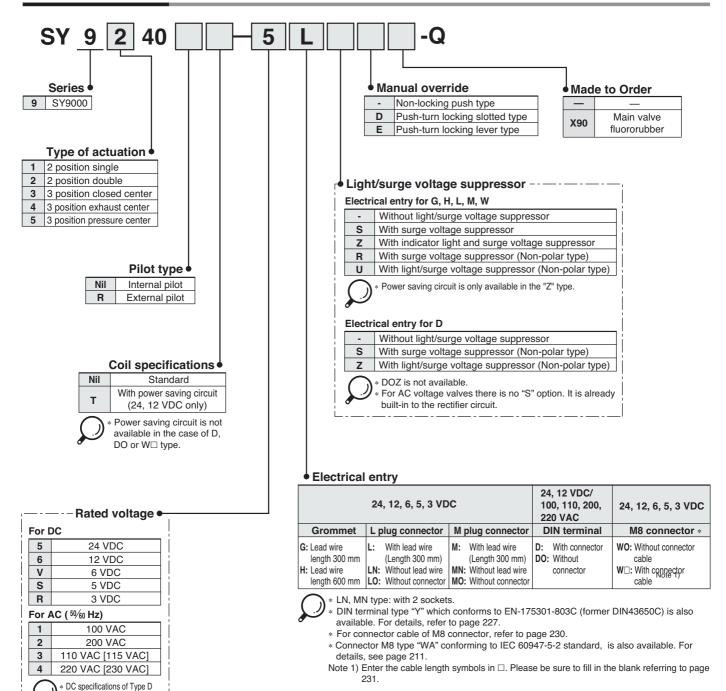



Type 43 Base Mounted



Manifold Specifications

Mode	l		SS5Y9-43			
Applic	SY9□40					
Manifo	old type		Stacking type			
P(SUP)/R(EXH) Common SUP, Common EXH						
Valve	stations		2 to 20 stations (1)			
A, B p	A, B port Location		Base			
Porting specifications Direction			Side			
	P, EA, EB po	t	C12 (One-touch fitting for ø12)			
Port			1/4 3/8			
size	A, B port		C8 (One-touch fitting for ø8) C10 (One-touch fitting for ø10) C12 (One-touch fitting for ø12)			
Manifold base weight W (g), n: Stations			W = 107n + 330			



Note 1) For more than 10 stations, supply pressure to P port on both sides and exhaust from EA/EB port on both sides.

Note 2) Refer to "Manifold Option" on page 109.

Flow Characteristics

	Port	Port size Flow characteristics								
Model	1-	VB)	4/2→5/3 (A/B→EA/EB)							
	(P, EA, EB)	(A, B)	C (dm3/ (s-bar))	b	Cv	Q[d/min(ANR)]*	C (dm3/(s-bar))	b	Cv	Q[t/min(ANR)]*
SS5Y9-43	C12	C12	6.4	0.29	1.6	1617	7.3	0.29	1.8	1845



Note) The value is for manifold base with 5 stations and individually operated 2 position type.




 $^{^{\}star}$ These values have been calculated according to ISO6358 and represent the flow rate measured in standard conditions at an upstream pressure of 0.6 MPa (relative pressure) and a differential $\,$ pressure of 0.1MPa.


(Station n) ---- (Station 1)

SY9000: SS5Y9-43-<u>Stations</u>D_-03,C12,N11_(-D)-Q

Grommet (G)


Stations n	2 stations	3	4	5	6	7	8	9	10 stations
L1	148	173	198	223	248	260.5	285.5	310.5	335.5
L2	137.5	162.5	187.5	212.5	237.5	250	275	300	325
L3	117	141	165	189	213	237	261	285	309
L4	15.5	16	16.5	17	17.5	12	12.5	13	13.5
L5	103	127	151	175	199	223	247	271	295

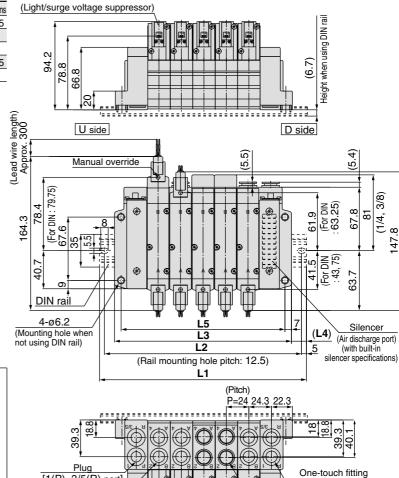



* When P, R port outlets are indicated on the D side, the P, R ports on the opposite side are plugged.

With External Pilot Specifications

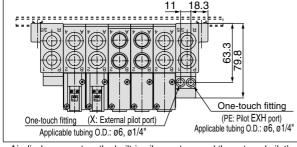

^{*} Air discharge port on the built-in silencer type and the external pilot's extracting position are in the D side.

L plug connector (L) M plug connector (M) DIN terminal (D) M8 connector (WO) M8 x 1 S 184.1 9'.29 87.6 82.8 182. 165.8 164 204. 48 167 167 65.25 63.8 83.6 82. (Lead wire length) Approx. 300 105.3 Approx. 300 81.2 (Lead wire length) 109.2 98.7 Pg7 78.8 120.5 94.2 Max. 128 Applicable cable O.D. Note) Refer to back page 12 for ø3.5 to ø7 dimensions of connector types.

[1(P), 3/5(R) port]

One-touch fitting

[4(A), 2(B) port]

Applicable tubing O.D.: Ø8, Ø5/16" : Ø10, Ø3/8" : Ø12 [1(P), 3/5(R) port]

Applicable tubing O.D.: ø12, ø3/8"


1/4,3/8


[4(A), 2(B) port]

Type 43 Base Mounted

SY9000: SS5Y9-43-Stations U -03, C10, N11 (-D)-Q


Grommet (G)





DIN rail holding screw

<When attaching the DIN rail> Tightening torque: 0.55 to 0.65 N·m (Light/surge voltage suppressor)

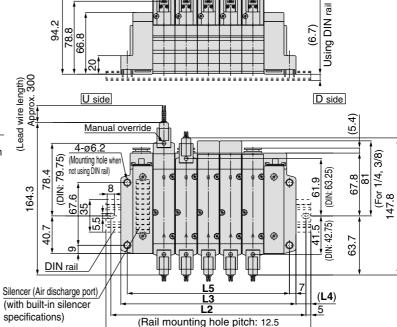


(Station n) - - - - - (Station 1)


* When P, R port outlets are indicated on the U side, the P, R

* When P, R port outlets are indicated on the U side, the P, R ports on the opposite side are plugged.

With External Pilot Specifications

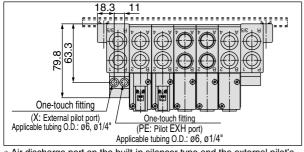

* Air discharge port on the built-in silencer type and the external pilot's extracting position are in the D side.

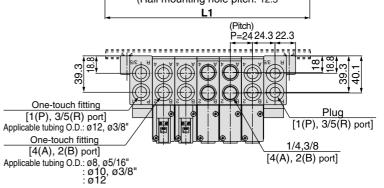

L plug connector (L) M plug connector (M) **DIN terminal (D)** M8 connector (WO) M8 x 1 202.3 182.3 187.6 204.1 82.8 65.8 184.1 ဖ 164. 48 167 51 167. 63.8 95 82 83. (Lead wire length) Approx. 300 105.3 81.2 109.2 (Lead wire length) 98.7 Pg7 78.8 10 120.5 94.2 128 Applicable cable O.D. Note) Refer to back page 12 for ø3.5 to ø7 dimensions of connector types.


(Station n) -----(Station 1)

SY9000: SS5Y9-43-<u>Stations</u>B__-^{02, C8, N9}_{03, C12}(-D)-Q

Grommet (G)


Stations n	2 stations	3	4	5	6	7	8	9	10 stations
L1	148	173	198	223	248	260.5	285.5	310.5	335.5
L2	137.5	162.5	187.5	212.5	237.5	250	275	300	325
L3	117	141	165	189	213	237	261	285	309
L4	15.5	16	16.5	17	17.5	12	12.5	13	13.5
L5	103	127	151	175	199	223	247	271	295

Stations n	11 stations	12	13	14	15	16	17	18	19	20 stations
L1	360.5	385.5	410.5	435.5	460.5	485.5	510.5	535.5	560.5	573
L2	350	375	400	425	450	475	500	525	550	562.5
L3	333	357	381	405	429	453	477	501	525	549
L4	14	14.5	15	15.5	16	16.5	17	17.5	18	12
L5	319	343	367	391	415	439	463	487	511	535

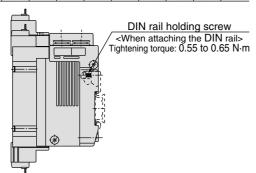


* When P, R port outlets are indicated on the B side, the P, R ports on the both sides are in the open state.

With External Pilot Specifications

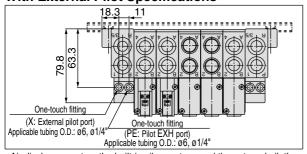


* Air discharge port on the built-in silencer type and the external pilot's extracting position are in the B side (both sides).

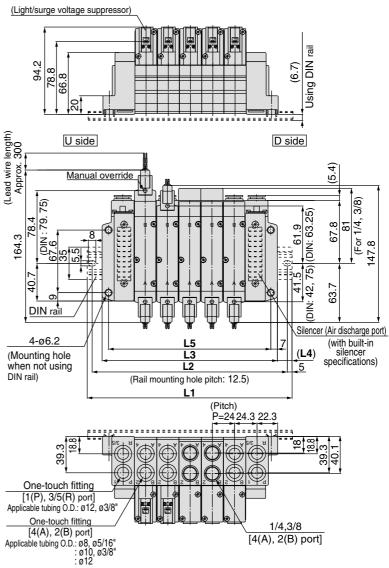

L plug connector (L) M plug connector (M)

DIN terminal (D)

M8 connector (WO)

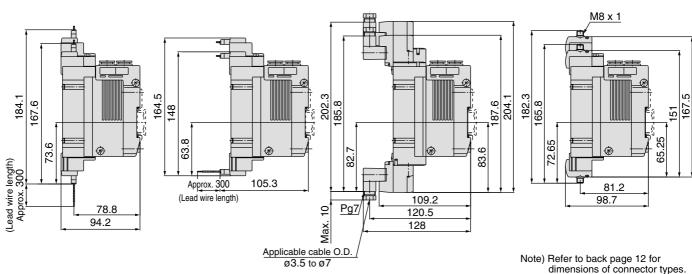




5 Port Solenoid Valve Series SY3000/5000/7000 Base Mounted



Bar Stock Type/Flat Ribbon Cable

How to Order Manifold

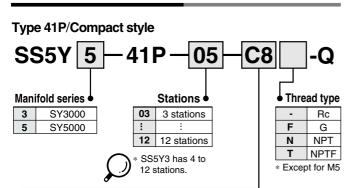

• A, B port size Thread piping

Symbol	Port size	Applicable series
M5	M5	SY3000
01	1/8	SY5000


One-touch fitting (Metric size)

Symbol	Port size	Applicable series			
C4	One-touch fitting for ø4	SY3000			
C6	One-touch fitting for ø6	SY3000			
	One-touch fitting for ø6	SY5000			
C8	One-touch fitting for ø8	313000			

One-touch fitting (Inch size)

Symbol	Port size	Applicable series	
N3	One-touch fitting for ø5/32"	SY3000	
N7	One-touch fitting for ø 1/4"	313000	
N7	One-touch fitting for ø 1/4"	SY5000	
N9	One-touch fitting for ø5/16"	313000	

Type 42P/Common external pilot

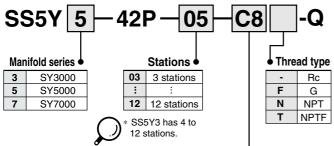

A, B port size

Symbol	Port size	Applicable series
01	1/8	SY3000
02	1/4	SY5000
02	1/4	SY7000


One-touch fitting (Metric size)

One-	touch fitting (wetri	c size)		
Symbol	Port size	Applicable series		
C4	One-touch fitting for ø4	SY3000		
C6	One-touch fitting for ø6	313000		
C6	One-touch fitting for ø6	CVEOOO		
C8	One-touch fitting for ø8	SY5000		
C10	One-touch fitting for ø10	SY7000		

One-touch fitting (Inch size)

Onc	todon nitting (mon t	3120)		
Symbol	Port size	Applicable series		
N3	One-touch fitting for ø5/32"	SY3000		
N7	One-touch fitting for ø1/4"	313000		
N7	One-touch fitting for ø1/4"	SY5000		
N9	One-touch fitting for ø5/16"	515000		
N9	One-touch fitting for ø5/16"	SY7000		

How to Order Valve Manifold Assembly (Example)

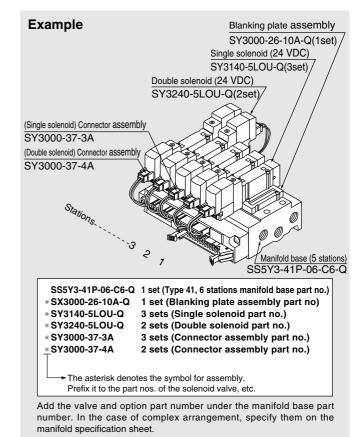


SY3000/5000/7000 Base Mounted



How to Order Valve



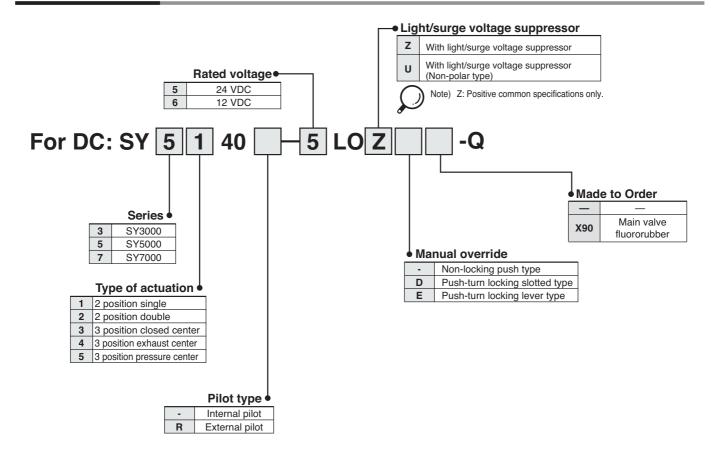

How to Order Connector Assembly


For 12, 24 VDC

For DC	For SY3000	For SY5000/7000		
For single solenoid	SY3000-37-3A	SY5000-37-3A		
Double solenoid, 3 position type	SY3000-37-4A	SY5000-37-4A		
Single with spacer assembly	SY5000-37-3A	SY5000-37-5A		
Double, 3 position with spacer assembly	SY3000-37-6A	SY5000-37-6A		

Multiple valve wiring is simplified through the use of the flat cable connector.

Clean appearance

In the case of a flat ribbon cable type, each valve is wired on the print board of manifold base to allow the external wiring to be piped all together with 26 pins MIL connector.



Flat Ribbon Cable Manifold Specifications

Model			SS5Y3-41P	SS5Y3-42P	SS5Y5-41P	SS5Y5-42P	SS5Y7-42P				
Applica	able	valve	SY3	□40	SY5□40 SY7□						
Manifo	old ty	γре		Single base/B mount							
P(SUP)	/R(E	XH)		Comm	on SUP, Commo	on EXH					
Valve	stati	ons	4 to 12 s	tations ⁽¹⁾	3	to 12 stations ^{Not}	e 1)				
A, B po	ort	Location			Base						
Porting specifications Direction				Side							
P, EA, EB port			1,	/8	1,	1/4					
Port size	Α,	B port	M5 C4 (One-touch fitting for ø4) C6 (One-touch fitting for ø6)	1/8 C4 (One-touch fitting for ø4) C6 (One-touch fitting for ø6)	1/8 C6 (One-touch fitting for ø6) C8 (One-touch fitting for ø8)	1/4 C6 (One-touch fitting for ø6) C8 (One-touch fitting for ø8)	1/4 C10 (One-touch fitting for ø10)				
Manifol W (g), r		se weight itions	W = 39n + 83	W = 48n + 99	W = 67n + 118	W = 88n + 151	W = 109n + 174				
Applicable fla	at ribbon	cable connector	Flat ribbon cable connector, Socket: 26 pins MIL type with strain relief, Conforming to MIL-C-83503								
Interna	al wi	ring	In common between +COM and -COM (Z type: +COM only).								
Rated	volta	age			12, 24 VDC						

Note 1) For more than 10 stations (more than 5 stations in case of SS5Y7), supply pressure to P port on both sides and exhaust from EA/EB port on both sides.

Note 2) The withstand voltage specification for the wiring unit section is JIS C 0704, Grade 1 or its equivalent.

Note 3) Refer to "Manifold Option" on page 109.


Flow Characteristics

	Port	size	Flow characteristics									
Model	1, 5, 3	4, 2	1 –	→ 4/2	$(P \rightarrow P)$	A/B)	$4/2 \rightarrow 5/3 \text{ (A/B} \rightarrow \text{EA/EB)}$					
	(P, EA, EB) (A, B)		C (dm3/(s-bar))	b	Cv	Q[d/min(ANR)]*	C (dm3/(s-bar))	b	Cv	Q[d/min(ANR)]*		
SS5Y3-41P	1/8	C6	0.75	0.19	0.18	179	0.81	0.23	0.20	197		
SS5Y3-42P	1/8	C6	0.75	0.20	0.18	180	0.82	0.20	0.20	196		
SS5Y5-41P	1/4	C8	1.8	0.23	0.44	439	1.9	0.16	0.45	445		
SS5Y5-42P	1/4	C8	1.9	0.20	0.46	455	1.9	0.12	0.43	436		
SS5Y7-42P	1/4	C10	3.0	0.25	0.75	740	3.0	0.12	0.66	688		

Note) The value is for manifold base with 5 stations and individually operated 2 position type.


* These values have been calculated according to ISO6358 and represent the flow rate measured in standard conditions at an upstream pressure of 0.6 MPa (relative pressure) and a differential pressure of 0.1MPa.

Internal Wiring of Manifold (Non-polar type)

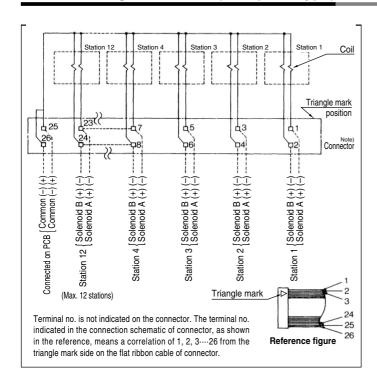



- For more than 10 stations, both poles of the common should be wired.
- For single solenoid, connect to the solenoid A side.
- The maximum number of stations that can be accommodated is 12. For more stations, please contact SMC.



∧Caution


• For non-polar (U) valves, the electrical DC connections can be used with either positive and negative COM. For type (Z), only use with positive COM as the valve does not operate correctly when used with negative COM.








SY3000: SS5Y3-41P- Stations -M5, C4, N3 -M5, C6, N7 -Q

With interface regulator (with gauge)

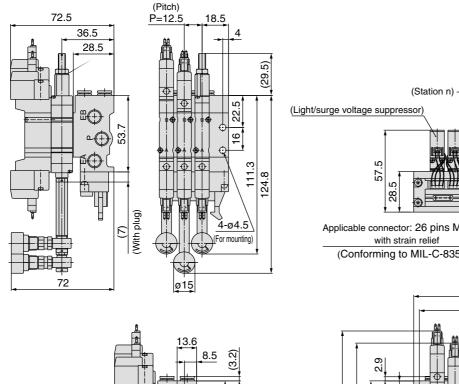


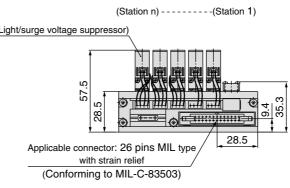




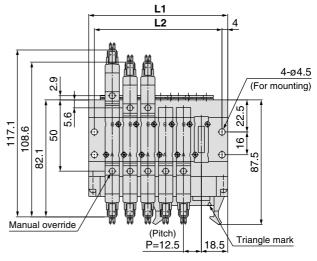

For M5



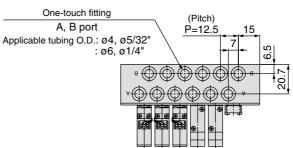


Stations n	4	5	6	7	8	9	10	11	12
L1	72.5	85	97.5	110	122.5	135	147.5	160	172.5
L2	64.5	77	89.5	102	114.5	127	139.5	152	164.5

SMC




SY5000: SS5Y5-41P-Stations -01, C6,N7 -Q

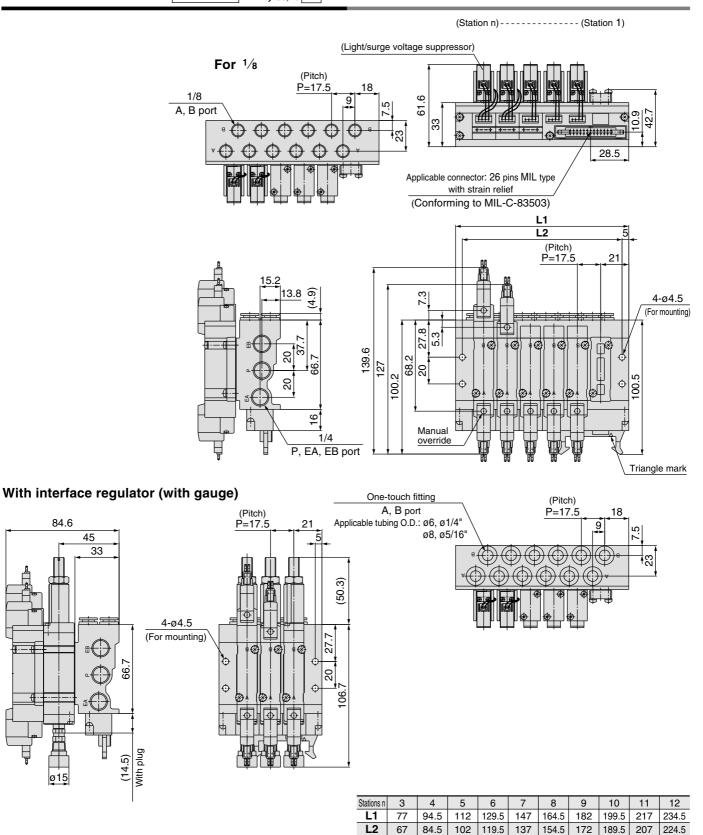



SY3000/5000/7000 Base Mounted




SY3000: SS5Y3-42P- Stations -01, C4, N3 -Q

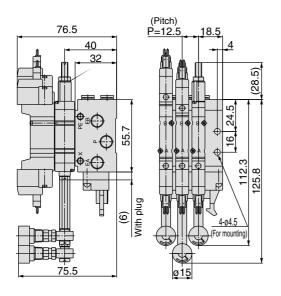

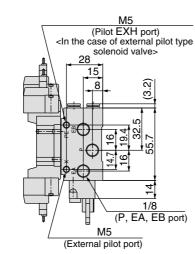




Stations n	4	5	6	7	8	9	10	11	12
L1	72.5	85	97.5	110	122.5	135	147.5	160	172.5
L2	64.5	77	89.5	102	114.5	127	139.5	152	164.5

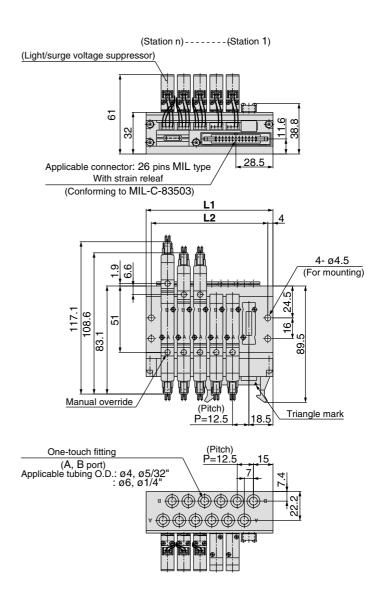






SY5000: SS5Y5-42P- Stations -02, C6, N7 Q. -Q

Grommet (G)

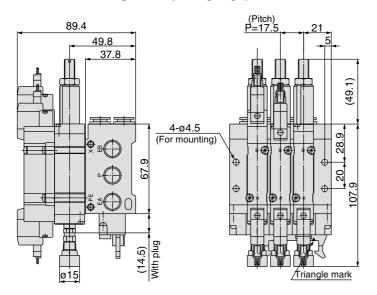


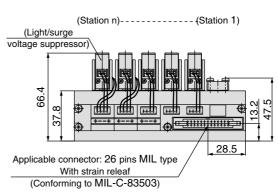

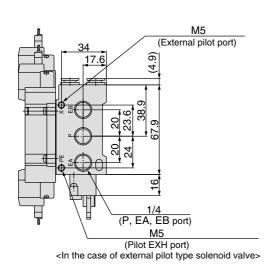

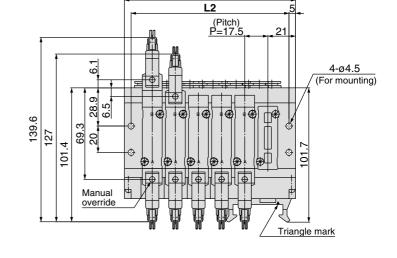

For 1/4

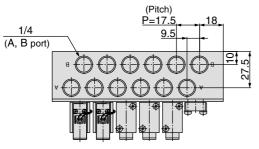

One-touch fitting (A, B port) Applicable tubing 0.D.: ø6, ø1/4"	(Pitch) P=17.5 9.5	•	18	7.8	
ø8, ø5/16"	(1)		→	•	27.3
				ı	


Stations n	3	4	5	6	7	8	9	10	11	12
L1	77	94.5	112	129.5	147	164.5	182	199.5	217	234.5
L2	67	84.5	102	119.5	137	154.5	172	189.5	207	224.5



SY7000: SS5Y7-42P- Stations -02, C10, N11 -Q


Grommet (G)



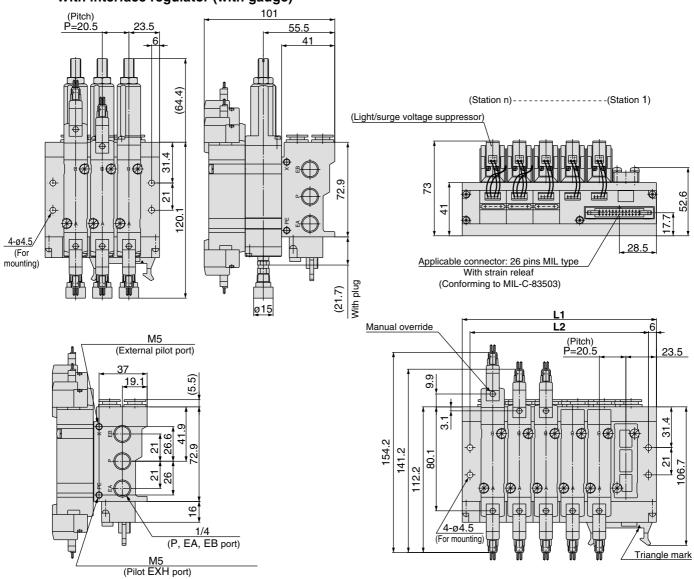

For 1/4

<In the case of external pilot type solenoid valve>

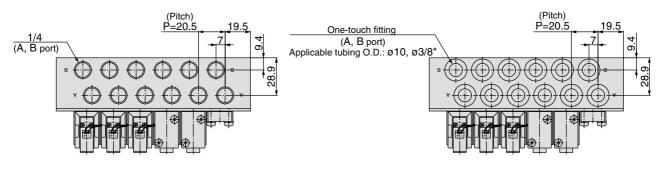

9	Stations n	3	4	5	6	7	8	9	10	11	12
	L1	88	108.5	129	149.5	170	190.5	211	231.5	252	272.5
	L2	76	96.5	117	137.5	158	178.5	199	219.5	240	260.5





5 Port Solenoid Valve Series SY9000 **Base Mounted**



Stacking Type/Flat Ribbon Cable

How to Order Manifold


Standard/Internal pilot specification

External pilot specification

Internal pilot/Built-in silencer

External pilot/Built-in silencer



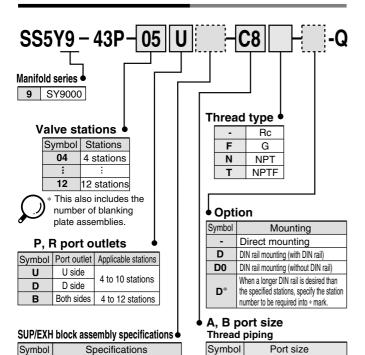

()2		1/4
(03		3/8
_			


One-touch fitting (Metric size)

Symbol	Port size
C8	One-touch fitting for ø8
C10	One-touch fitting for ø10
C12	One-touch fitting for ø12
M	Mixed

One-touch fitting (Inch size)

Symbol	Port size
N9	One-touch fitting for ø5/16"
N11	One-touch fitting for ø3/8"
M	Mixed


* In the case of mixed specifications (M), indicate separately on the manifold specification sheet.

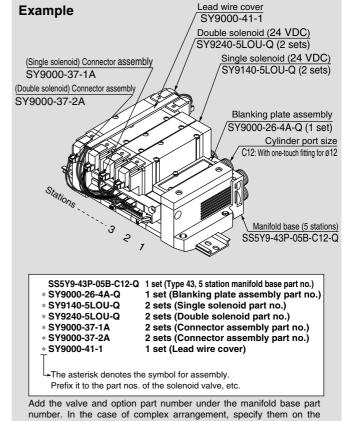

manifold specification sheet.

How to Order Valve



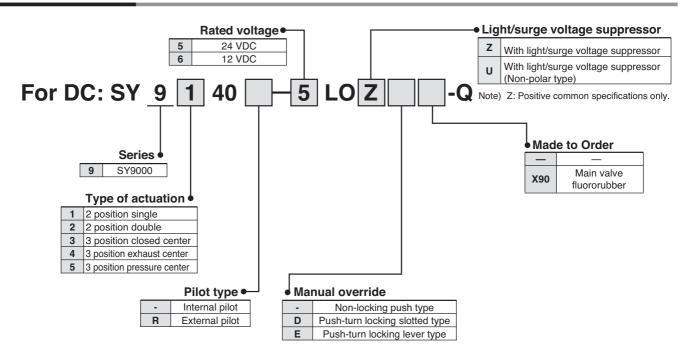

How to Order Connector Assembly

For 12, 24 VDC

For DC	For SY9000
For single solenoid	SY9000-37-1A
Double solenoid, 3 position type	SY9000-37-2A
Single with spacer assembly	SY9000-37-3A
Double, 3 position with spacer assembly	SY9000-37-4A



Multiple valve wiring is simplified through the use of the flat cable connector.

Clean appearance

In the case of a flat ribbon cable type, each valve is wired on the print board of manifold base to allow the external wiring to be piped all together with 26 pins MIL connector.



Flat Ribbon Cable Manifold Specifications

Model		SS5Y9-43P			
Applicable valve		SY9□40			
Manifold typ	е	Stacking type			
P (SUP)/R (I	EXH)	Common SUP, Common EXH			
Valve station	าร	4 to 12 stations Note 1)			
A, B port	Location	Base			
Porting specifications	Direction	Side			
P, EA, EB port		C12 (One-touch fitting for ø12)			
Port size	A, B port	1/4 3/8 C8 (One-touch fitting for Ø8) C10 (One-touch fitting for Ø10) C12 (One-touch fitting for Ø12)			
Manifold base weight W (g) n: Stations		W = 114n + 343			
Applicable flat ribbon cable connector		Flat ribbon cable connection, Socket: 26 pins MIL with strain relief, Conforming to MIL-C-83503			
Internal wirir	ng	In common between +COM and -COM (Z type: +COM only)			
Rated voltag	je	12, 24 VDC			



- Note 1) For more than 10 stations, supply pressure to P port on both sides and exhaust from EA/EB port on both sides.
- Note 2) The withstand voltage specification for the wiring unit section is JIS C 0704, Grade 1 or its equivalent.
- Note 3) Refer to "Manifold Option" on page 109.

Flow Characteristics


	Port	size	Flow chara				acteristics			
Model	1, 5, 3	4, 2	$1 \rightarrow 4/2 \ (P \rightarrow A/B)$			4/2 → 5/3 (A/B → EA/EB			→ EA/EB)	
	(P, EA, EB)	(A, B)	C (dm3/(s-bar))	b	Cv	Q[d/min(ANR)]*	C (dm3/(s-bar))	b	Cv	Q[d/min(ANR)]*
SS5Y9-43P	C12	C12	6.4	0.29	1.6	1617	7.3	0.29	1.8	1845



Note) The value is for manifold base with 5 stations and individually operated 2 position type.

*These values have been calculated according to ISO6358 and represent the flow rate measured in standard conditions at an upstream pressure of 0.6 MPa (relative pressure) and a differential pressure of 0.1MPa.

Internal Wiring of Manifold (Non-polar type)

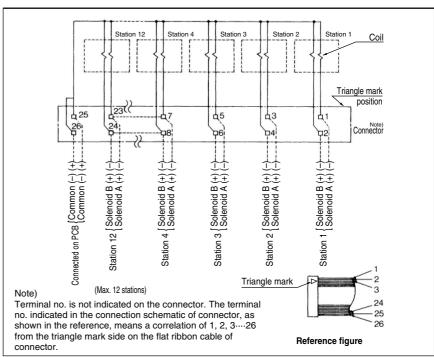




 For non-polar (U) valves, the electrical DC connections can be used with either positive and negative COM. For type (Z), only use with positive COM as the valve does not operate correctly when used with negative COM.



- For more than 10 stations, both poles of the common should be wired.
- For single solenoid, connect to the solenoid A side.
- The maximum number of stations that can be accommodated is 12. For more stations, please contact SMC.





SY9000 Base Mounted IV



27

(with built-in silencer specifications)

- 02 C8, N9 - 03 C10, N11 C12 SY9000: SS5Y9-43P-Stations D (-D)-Q




(Light/surge voltage suppressor)

Applicable connector: 26 pins MIL type with strain relief (Conforming to MIL-C-83503)


8.99


When P, R port outlets are indicated on the D side, the P, R ports on the opposite side are plugged.

63

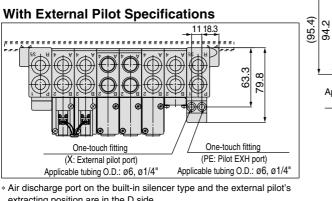

extracting position are in the D side.



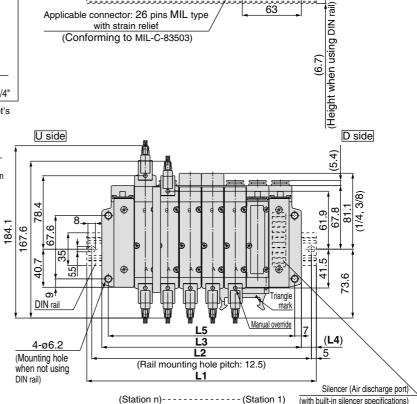

 $\frac{\text{Plug}}{[1(P), 3/5(R) \text{ port}]}$ One-touch fitting [1(P), 3/5(R) port] Applicable tubing O.D.: ø12, ø3/8" 1/4, 3/8 One-touch fitting [4 (A), 2 (B) port] [4(A), 2(B) port] Applicable tubing O.D.: ø8, ø5/16" : ø10, ø3/8" : ø12

Stations n	4 stations	5	6	7	8	9	10 stations
L1	198	223	248	260.5	285.5	310.5	335.5
L2	187.5	212.5	237.5	250	275	300	325
L3	165	189	213	237	261	285	309
L4	16.5	17	17.5	12	12.5	13	13.5
L5	151	175	199	223	247	271	295




SY9000: SS5Y9-43P-Stations U -03 C10, N11 (-D)-Q




When P, R port outlets are indicated on the U side, the P, R ports on the opposite side are plugged.

(Station n)-----(Station 1)


With External Pilot Specifications

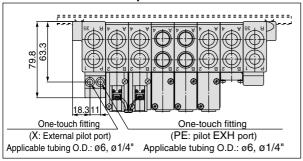


* Air discharge port on the built-in silencer type and the external pilot's extracting position are in the U side.

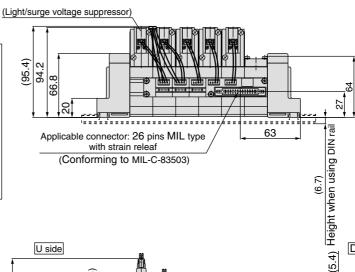

DIN rail holding screw
(When attaching the DIN rail)
Tightening torque: (0.55 to 0.65) N·m

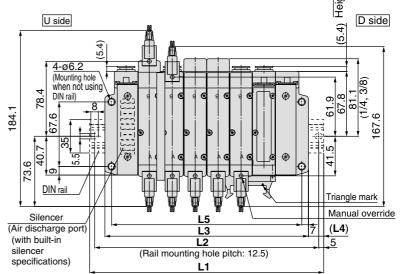

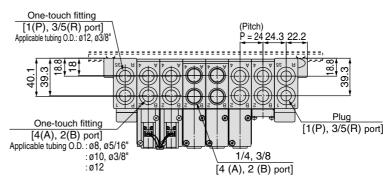

Stations n	4 stations	5	6	7	8	9	10 stations
L1	198	223	248	260.5	285.5	310.5	335.5
L2	187.5	212.5	237.5	250	275	300	325
L3	165	189	213	237	261	285	309
L4	16.5	17	17.5	12	12.5	13	13.5
L5	151	175	199	223	247	271	295




SY9000: SS5Y9-43P-Stations B -02 C8, N9 (-D)-Q


* When P, R port outlets are indicated on the B side, the P, R ports on the both sides are in the open state.


(Station n)-----(Station 1)


With External Pilot Specifications

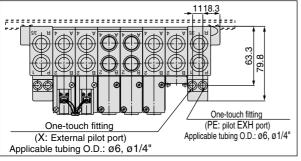


* Air discharge port on the built-in silencer type and the external pilot's extracting position are in the B side (both sides).

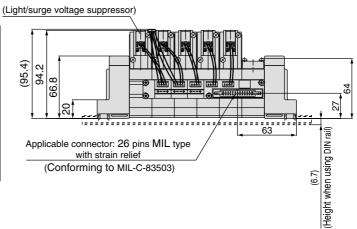

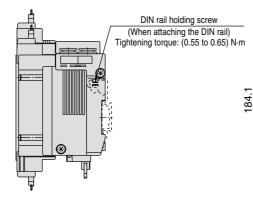

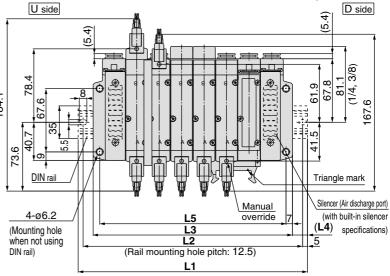

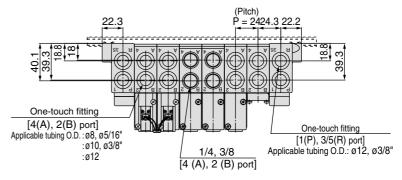


Stations n	4 stations	5	6	7	8	9	10	11	12 stations
L1	198	223	248	260.5	285.5	310.5	335.5	360.5	385.5
L2	187.5	212.5	237.5	250	275	300	325	350	375
L3	165	189	213	237	261	285	309	333	357
L4	16.5	17	17.5	12	12.5	13	13.5	14	14.5
L5	151	175	199	223	247	271	295	319	343





EX510 Gateway-type Serial Transmission System Base Mounted Manifold/Integrated Type Series SY3000/5000/7000

How to Order Manifold

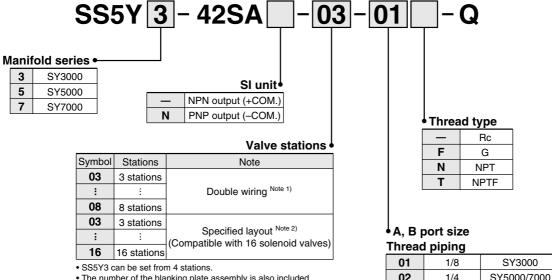


• The number of the blanking plate assembly is also included.

Note 1) Double wiring: Use of a single solenoid will result in an unused control signal. If this is not desired, order with a specified layout.

Note 2) Specified layout: Indicate wiring specifications on the manifold specification sheet. (Note that double and 3 position valves cannot be used where single solenoid wiring has been specified.)

How to Order Manifold Assembly (Example)

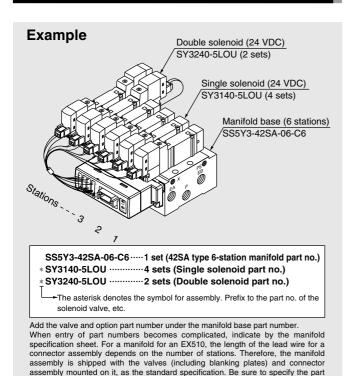

·····ouu pipiiig						
01 1/8		SY3000				
02	1/4	SY5000/7000				

One-touch fitting (Metric size)

C4	One-touch fitting for ø4	SY3000				
C6	313000					
C6	C6 One-touch fitting for ø6					
C8	C8 One-touch fitting for ø8					
C10	One-touch fitting for ø10	SY7000				

One-touch fitting (Inch size)

N3	One-touch fitting for ø5/32"	SY3000
N7	One-touch fitting for ø1/4"	313000
N7	N7 One-touch fitting for ø1/4"	
N9	One-touch fitting for ø5/16"	SY5000
N11	One-touch fitting for ø3/8"	SY7000

SI unit part no.

Symbol	SI unit specifications	SI unit part no.
_	NPN output (+COM.)	EX510-S001
N	PNP output (-COM.)	EX510-S101




nos. of the solenoid valves to be mounted.

Base Mounted Manifold Series SY3000/5000/7000



How to Order Valves



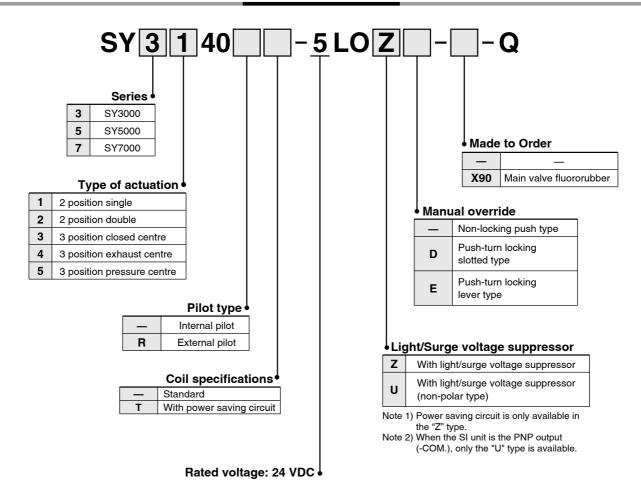



Note) When ordering single unit of the base mounted type solenoid valve, the mounting screws and gaskets for the manifold are included.

1ype 42SA Series SY3000/5000/7000

Dimensions

SY3000: SS5Y3-42SA - Stations -01 , C4, N3

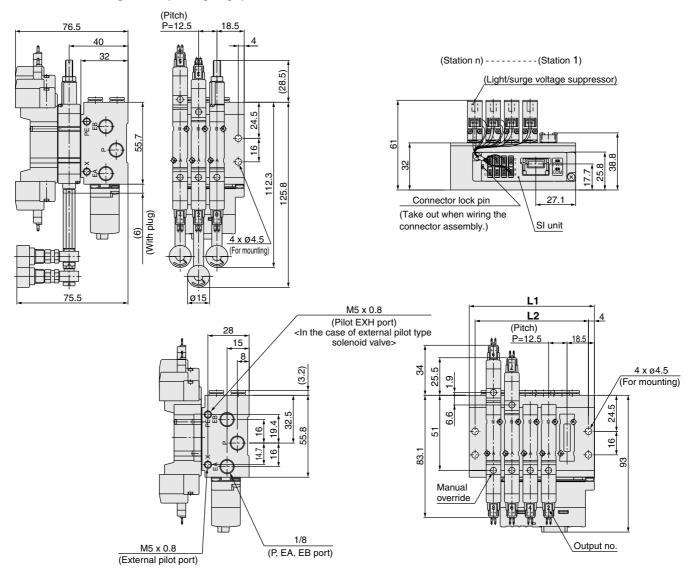

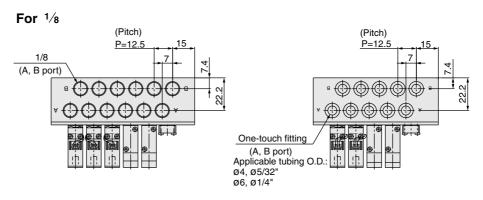



S	Stations n	4 stations	5	6	7	8	9	10	11	12	13	14	15	16 stations
	L1	72.5	85	97.5	110	122.5	135	147.5	160	172.5	185	197.5	210	222.5
	L2	64.5	77	89.5	102	114.5	127	139.5	152	164.5	177	189.5	202	214.5


Base Mounted Manifold Series SY3000/5000/7000





SY5000: SS5Y5-42SA - Stations -02 , C6, N7 C8, N9

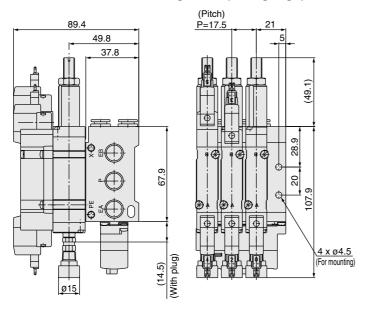

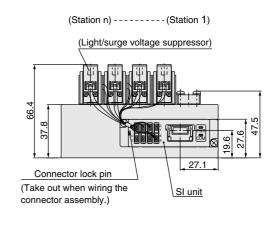

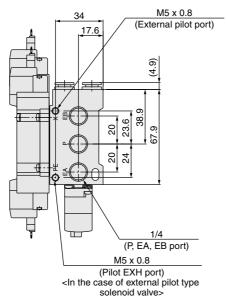

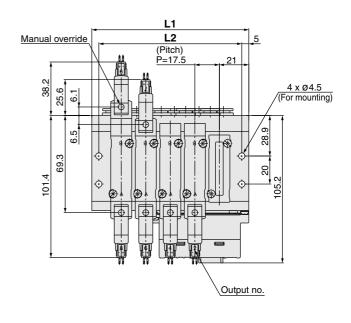

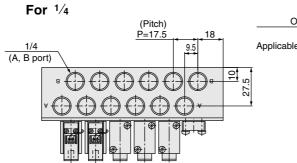


	One-touch fitting (A, B port) Applicable tubing O.D.: Ø6, Ø1/4" Ø8, Ø5/16" (Pitch) P=17.5 9.5 9.5	7.8
27.5		27.3


Stations r	3 stations	4	5	6	7	8	9	10	11	12	13	14	15	16 stations
L1	77	94.5	112	129.5	147	164.5	182	199.5	217	234.5	252	269.5	287	304.5
L2	67	84.5	102	119.5	137	154.5	172	189.5	207	224.5	242	259.5	277	294.5


Series SY3000/5000/7000


Dimensions


SY7000: SS5Y7-42SA - Stations -02 , C10, N11

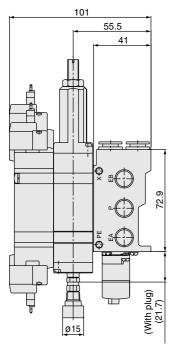


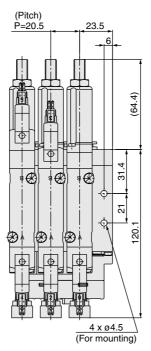


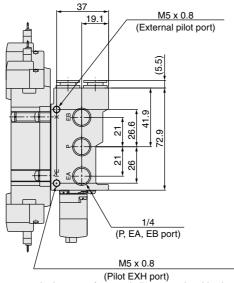

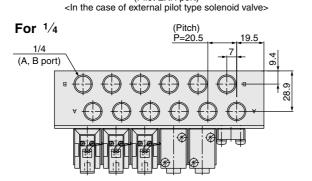

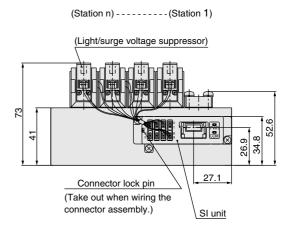

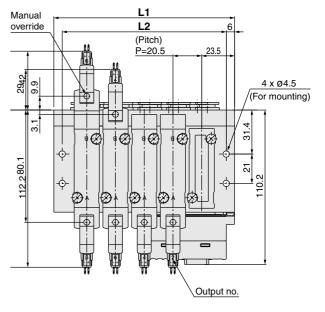

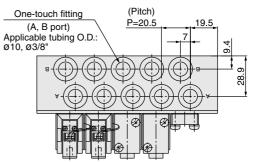


Stations n	3 stations	4	5	6	7	8	9	10	11	12	13	14	15	16 stations
L1	88	108.5	129	149.5	170	190.5	211	231.5	252	272.5	293	313.5	334	354.5
L2	76	96.5	117	137.5	158	178.5	199	219.5	240	260.5	281	301.5	322	342.5




EX510 Gateway-type Serial Transmission System Base Mounted Manifold/Stacking Type ASSA Series SY9000 (ELE

How to Order Manifold

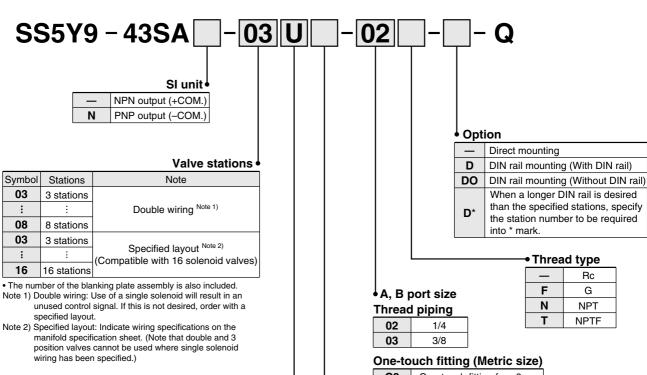

How to Order Manifold Assembly (Order Example)

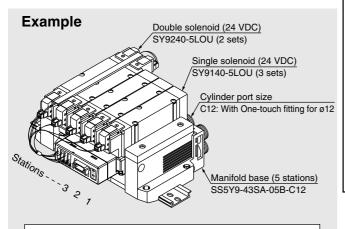

SS5Y9-43SA-05B-C12 ··· 1 set (43SA type 5-station manifold part no.) * SY9140-5LOU 3 sets (Single solenoid part no.) * SY9240-5LOU 2 sets (Double solenoid part no.)

The asterisk denotes the symbol for assembly. Prefix to the part no. of the solenoid valve, etc.

Add the valve and option part number under the manifold base part number. When entry of part numbers becomes complicated, indicate by the manifold specification sheet. For a manifold for an EX510, the length of the lead wire for a connector assembly depends on the number of stations. Therefore, the manifold assembly is shipped with the valves (including blanking plates) and connector assembly mounted on it, as the standard specification. Be sure to specify the part nos. of the solenoid valves to be mounted.

0	aon mang (moure cize)
C8	One-touch fitting for ø8
C10	One-touch fitting for ø10
C12	One-touch fitting for ø12
M	Mixed

One-touch fitting (Inch size)

N9	One-touch fitting for ø5/16"
N11	One-touch fitting for ø3/8"
М	Mixed

[•] For the mixed specification, indicate separately on a manifold specification sheet.

SUP/EXH block assembly specifications

_	Standard/Internal pilot
R	External pilot
S	Internal pilot, Built-in silencer
RS	External pilot, Built-in silencer

P, R port outlets

U	U side	3 to 10 stations
D	D side	3 to 10 stations
В	Both sides	3 to 16 stations

SI unit part no.


O : G :::::	P 41. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1	
Symbol	SI unit specifications	SI unit part no.
_	NPN output (+COM.)	EX510-S001
N	PNP output (-COM.)	EX510-S101





How to Order Valves



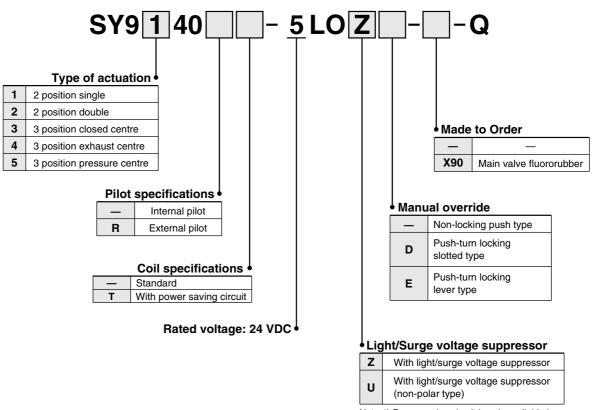

Note) When ordering single unit of the base mounted type solenoid valve, the mounting screws and gaskets for the manifold are included.

Note 1) Power saving circuit is only available in the "Z" type.

the "Z" type.


Note 2) When the SI unit is the PNP output
(-COM.), only the "U" type is available.







Dimensions

SY9000: SS5Y9-43SA - Stations U - 02 , C8, N9 C10, N11 (-D)

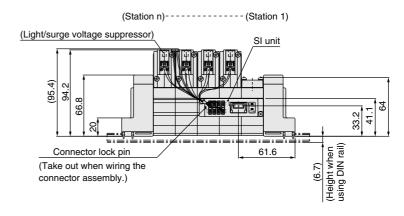

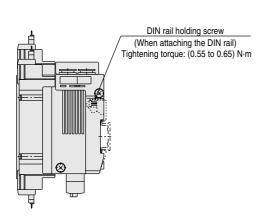

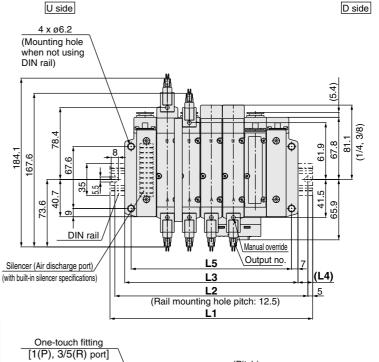


(Pitch)

1/4, 3/8

[4 (A), 2 (B) port]

With External Pilot Specifications

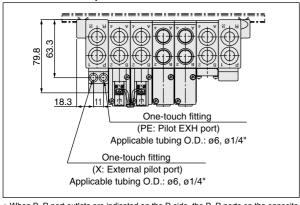

- * When P, R port outlets are indicated on the D side, the P, R ports on the opposite side are plugged.
- side any progress. Air discharge port on the built-in silencer type and the external pilot's extracting position are in the U side.

Stations n	3 stations	4	5	6	7	8	9	10 stations
L1	173	198	223	248	260.5	285.5	310.5	335.5
L2	162.5	187.5	212.5	237.5	250	275	300	325
L3	141	165	189	213	237	261	285	309
L4	16	16.5	17	17.5	12	12.5	13	13.5
L5	127	151	175	199	223	247	271	295



Applicable tubing O.D.: ø12, ø3/8"

40.1 39.3

One-touch fitting

[4(A), 2(B) port]

Applicable tubing O.D.: ø8, ø5/16"


: ø10, ø3/8" : ø12 Plug


[1(P), 3/5(R) port]


Type 43SA Series SY9000

Dimensions


C8, N9 C10, N11 (-D) SY9000: SS5Y9-43SA - Stations D - 02 03 03

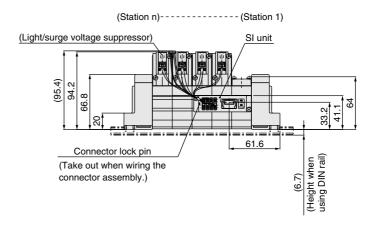



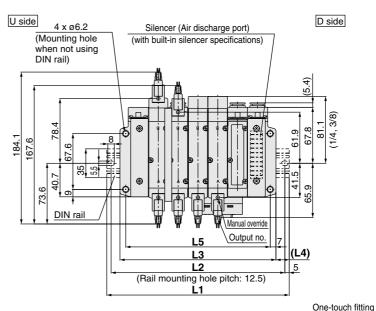

With External Pilot Specifications

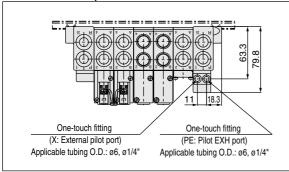

- * When P, R port outlets are indicated on the D side, the P, R ports on the
- opposite side are plugged.

 * Air discharge port on the built-in silencer type and the external pilot's extracting position are in the D side.

$\sqrt{[1(P), 3/5(R) port]}$
(Pitch) Applicable tubing O.D.:
P=24 24.3 22.2 / ø12, ø3/8"
=:=;=:=:=:=:=:=
Plug (a) (a) (a)
[1(P), 3/5(R) port]
One-touch fitting
[4(A), 2(B) port]
Applicable tubing O.D.: ø8, ø5/16" [4 (A), 2 (B) port]
: ø10, ø3/8"
: ø12


Stations n	3 stations	4	5	6	7	8	9	10 stations
L1	173	198	223	248	260.5	285.5	310.5	335.5
L2	162.5	187.5	212.5	237.5	250	275	300	325
L3	141	165	189	213	237	261	285	309
L4	16	16.5	17	17.5	12	12.5	13	13.5
L5	127	151	175	199	223	247	271	295


Base Mounted Manifold Series SY9000 Type 13




SY9000: SS5Y9-43SA __- Stations B __- ___ 02 ___, C10, N11 (-D)


(Station n)----- (Station 1)

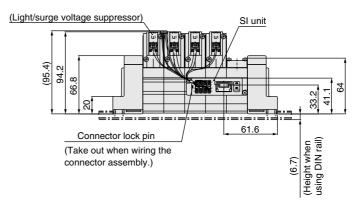



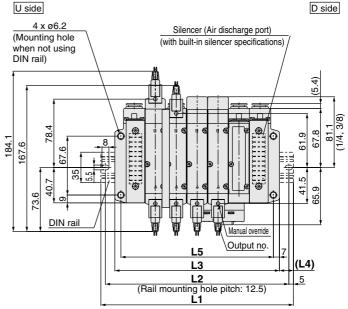

With External Pilot Specifications

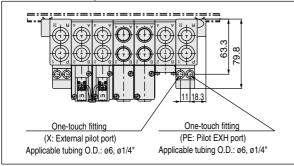


- * When P, R port outlets are indicated on the B side, the P, R ports on the both sides are in the open state.
- Air discharge port on the built-in silencer type and the external pilot's extracting position are in the B side (both sides).

	One-touch fitting
	(Pitch) [1(P), 3/5(R) port]
22.3	P=24 24.3 22.2 Applicable tubing O.D.:
 	ø12, ø3/8"
	<u>=========</u>
1.04	
4 6	
	() () () () () () () () () ()
One-touch fitting	
[4(A), 2(B) port]	
Applicable tubing O.D.: ø8, ø5/16" 1/4, 3/8	
: ø10, ø3/8" [4 (A), 2 (B)	port
: ø12	•

Stations	n 3 stations	4	5	6	7	8	9	10	11	12	13	14	15	16 stations
L1	173	198	223	248	260.5	285.5	310.5	335.5	360.5	385.5	410.5	435.5	460.5	485.5
L2	162.5	187.5	212.5	237.5	250	275	300	325	350	375	400	425	450	475
L3	141	165	189	213	237	261	285	309	333	357	381	405	429	453
L4	16	16.5	17	17.5	12	12.5	13	13.5	14	14.5	15	15.5	16	16.5
L5	127	151	175	199	223	247	271	295	319	343	367	391	415	439


Manifold Option

■ Type 41, 42, 43 Blanking plate assembly




Series	Assembly part no.
SY3000	SY3000-26-9A-Q
SY5000	SY5000-26-20A-Q
SY7000	SY7000-26-22A-Q
SY9000	SY9000-26-2A-Q

■ Type 41P, 42P, 43P Blanking plate assembly




Series	Assembly part no.			
SY3000	SY3000-26-10A-Q			
SY5000	SY5000-26-21A-Q			
SY7000	SY7000-26-23A-Q			
SV9000	SV9000-26-4A-O			


■ Gasket assembly part no.



Series	Assembly part no.
SY3000	SY3000-GS-2
SY5000	SY5000-GS-2-Q
SY7000	SY7000-GS-2-Q
SY9000	SY9000-GS-2



■ Individual SUP spacer assembly



Series	Assembly part no.	Port size	t
SY3000	SY3000-38-2A-Q	M5	11
SY5000	SY5000-38-16*A-Q	1/8	15
SY7000	SY7000-38-16*A-Q	1/4	18
SY9000	SY9000-38-2*A-Q	1/4	20

Note) • The SUP port of SY3000, 5000 and 7000 may be either on the lead wire side or on the end plate side. However, as the CE-compliant products (-Q) must be mounted in the specified direction, the port directions cannot be changed. (An assembly is shipped under the condition shown in the figure.) For the SY9000, it can only be used on the end

Caution

* Thread type

Mounting screw tightening torques


M2: 0.16 N·m M3: 0.8 N·m M4: 1.4 N·m

-	Rc
F	G
N	NPT
Т	NPTF
	-

<u>∕!\</u>Warning

When mounting a valve or spacer on the manifold base or sub-plate, etc., those mounting directions are determined. If mounted in the wrong direction, the equipment to be connected may cause malfunction. Refer to external dimensions, and then mount it.

■ Individual EXH spacer assembly




Serie	s	Assembly part no.	Port size	t
SY30	00	SY3000-39-2A-Q	M5	11
SY50	00	SY5000-39-16*A-Q	1/8	15
SY70	00	SY7000-39-16*A-Q	1/4	18
SVan	าก	SV9000-39-2*A-0	1/4	20

| **SY9000** | SY9000-39-2*A-Q | Note) • In case of 41P, 42P and 43P, for protection of the wiring unit section from drainage, piping at the EA port should be arranged so that it will not be directly exposed to exhaust from the valve. However, as the CE-compliant products (-Q) must be mounted in the specified direction, the port directions cannot be changed. (An assembly is shipped under the condition shown in the figure.) • For the SY9000, it can only be used on the end


plate side.

[: Available X: Not available —: Nonapplicable manifold]



Series	Assembly part no.					
SY3000	SY3000-GS-2					
SY5000	SY5000-GS-2-Q					
SY7000	SY7000-GS-2-Q SY9000-GS-2					
SY9000						
Note) Gasket assembly consists of mounting						

Individual SUP spacer assembly
+ Individual EXH spacer assembly
(Double encoar)

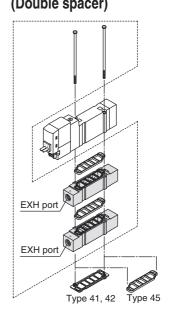

-										
		Individual SUP +				Applicab	le manif	old types	3	
	Series	Individual EXP Assemble part no.	Port size	41	41P	42	42P	45	45-A 45-NA	45□
	SY3000	SY3000-120-2A-Q	M5	•	Χ	•	Χ	•	Х	Х
	SY5000	SY5000-75-1*A-Q	1/8		Χ	•	Χ	•	Х	Х
	SY7000	SY7000-73-1*A-Q	1/4		Χ		Χ	_	_	_

Note) The port on a spacer can be directed to the pilot valve side or end plate side. However, as the CE-compliant products (-Q) must be mounted in the specified direction, the port directions cannot be changed. For mounting the port to the pilot valve side, please make sure to connect the ports to protect the pilot valve wiring section from drainage.


The individual SUP spacer and EXH spacer can be mounted either on the upper side or lower side. (The above illustration shows the condition when the product is shipped out from a factory.)


Base Mounted Manifold Series SY3000/5000/7000/9000



Manifold Option

■ Connector assembly For single solenoid (SY3000-37-81A-□-N)






Connector assembly order no. (Can be used for the manifold without a specified layout (8 stations or less)) Integrated type

ting position
or 1 to 4 stations
or 1 to 4 stations
or 5 to 8 stations
or 5 to 8 stations
or 1 to 8 stations
or 1 to 8 stations
or 1 to 4 stations
or 1 to 4 stations
or 5 to 8 stations
or 5 to 8 stations
וכ

Note) The above is for the station addition or maintenance. When ordering a connector assembly separately, a number would not be printed on the connector.

■ Connector assembly SY3000-37-80A-□



■ Housing (8 pcs./set) SY3000-44-3A



Connector assembly order no. (Can be used for the manifold with a specified layout)

bonnector assembly order no. (but be asea for the marmola with a specifica layout)							
Model	Part no.		Connector mounting position				
	SY3000-37-80A-3	For A side	For 1 to 8 stations				
CCEVO 40CA	SY3000-37-80A-6	For B side	For 1 to 6 stations				
SS5Y3-42SA	SY3000-37-80A-4	For A side	For 9 to 16 stations				
	SY3000-37-80A-7	For B side	For 9 to 16 stations				
	SY3000-37-80A-3	For A side	For 1 to 8 stations				
CCEVE 40CA	SY3000-37-80A-6	For B side	FOI 1 to 8 Stations				
SS5Y5-42SA	SY3000-37-80A-7	For A side	For O to 10 stations				
	SY3000-37-80A-9	For B side	For 9 to 16 stations				
	SY3000-37-80A-4	For A side	For 1 to 8 stations				
CCEV7 40CA	SY3000-37-80A-7	For B side	FOI 1 to 8 Stations				
SS5Y7-42SA	SY3000-37-80A-8	For A side	For 9 to 16 stations				
	SY3000-37-80A-11	For B side	For 9 to 16 stations				
	SY3000-37-80A-6	For A side	For 1 to 8 stations				
	SY3000-37-80A-11	For B side	FOI 1 to 8 Stations				
CCEVO 42CA	SY3000-37-80A-9	For A side	For 0 to 10 stations				
SS5Y9-43SA	SY3000-37-80A-14	For B side	For 9 to 12 stations				
	SY3000-37-80A-13	For A side	For 12 to 16 stations				
	SY3000-37-80A-18	For B side	For 13 to 16 stations				

Note 1) The above is for station addition or maintenance. When ordering a connector assembly separately, a number will not be printed on the connector.

Note 3) Wiring is set longer than the actual wiring distance



Note 2) After inserting the connector assembly into the housing, be sure to confirm that the lead wire will not come off by lightly pulling the wire. Furthermore, do not reuse the lead wire after it has been inserted and removed.



Manifold Option

■SUP blocking disk (For SY9000)

By installing a SUP blocking disk in the pressure supply passage of a manifold valve, it is possible to supply two or more different high and low pressures to one manifold.



SY9000 SY9000-57-1A	Series	No.
0.0000 0.0000 0	SY9000	SY9000-57-1A

■ EXH blocking disk (For SY9000)

By installing an EXH blocking disk in the exhaust passage of a manifold valve, it is possible to divide the valve's exhaust so that it does not affect another valve. (Two blocking disks are needed to divide both exhausts.)



Series	No.
SY9000	SY9000-57-1A

■ Label for block disk (For SY9000)

The labels shown below are used on manifold stations containing SUP/EXH block disk(s) to show their location. (3 pcs. each)

VZ3000-123-1A

Label for SUP block disk Label for EXH block disk Label for SUP/EXH block disk








Note) When a block disk is concurrently ordered by specifying on the manifold specification sheet, etc., a label will be stuck on the position where block disk is mounted.

■ Cable assembly

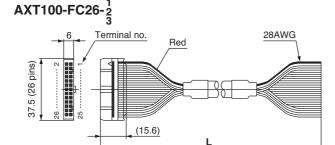

Flat ribbon cable connector

Cabla langth (1)	Assembly part no.
Cable length (L)	26 pins
1.5 m	AXT100-FC26-1
3 m	AXT100-FC26-2
5 m	AXT100-FC26-3


- * When using a standard commercial connector, use a 26-pin type connector conforming to MIL-C-83503 with strain relief.
- * Cannot be used for movable wiring
- * Lengths other than the above are also available. Please contact SMC for details.

Connector Manufacturers' Example

- · HIROSE ELECTRIC CO., LTD.
- 3M Japan Limited
- Fujitsu Limited
- · Japan Aviation Electronics Industry, Limited
- J.S.T. Mfg. Co., Ltd.
- Oki Electric Cable Co., Ltd.

■ Silencer with One-touch fitting (For SY9000)

The silencer plugs directly into the One-touch fittings of the manifold R (exhaust) port.




For Series	Model	Effective area mm ²	Α	В	С
SY9000 (Ø12)	AN30-C12	41	ø20	43.5	71.5

■ DIN Rail Dimensions/Weight for SY9000

VZ1000 −11 −4 − ☐ • Refer to L dimensions

* Fill in \square with an appropriate no. listed on the table of DIN rail dimensions shown below.




		11								
No.	0	1	2	3	4	5	6	7	8	9
L Dimension	98	110.5	123	135.5	148	160.5	173	185.5	198	210.5
Weight (g)	24.8	28	31.1	34.3	37.4	40.6	43.8	46.9	50.1	53.3
No.	10	11	12	13	14	15	16	17	18	19
L Dimension	223	235.5	248	260.5	273	285.5	298	310.5	323	335.5
Weight (g)	56.4	59.6	62.7	65.9	69.1	72.2	75.4	78.6	81.7	84.9
No.	20	21	22	23	24	25	26	27	28	29
L Dimension	348	360.5	373	385.5	398	410.5	423	435.5	448	460.5
Weight (g)	88	91.2	94.4	97.5	100.7	103.9	107	110.2	113.3	116.5
No.	30	31	32	33	34	35	36	37	38	
L Dimension	473	485.5	498	510.5	523	535.5	548	560.5	573	
Weight (g)	119.7	122.8	126	129.2	132.3	135.5	138.6	141.8	145	

- Note) For DIN rail, refer to page 229.
 - Refer to L1 dimension on pages starting with pages 106 through 108 for lengths that correspond to the number of manifold stations.

■ Plug

These are inserted in unused cylinder ports and SUP, EXH ports. Purchasing order is available in units of 10 pieces.




Dimensions

Applicable fittings size ød	Model	Α	L	D
4	KQ2P-04	16	32	6
6	KQ2P-06	18	35	8
8	KQ2P-08	20.5	39	10
10	KQ2P-10	22	43	12
12	KQ2P-12	24	44.5	14
1/8"	KQ2P-01	16	31.5	5
5/32"	KQ2P-03	16	32	6
1/4"	KQ2P-07	18	35	8.5
5/16"	KQ2P-09	20.5	39	10
3/8"	KQ2P-11	22	43	11.5

Manifold Option

■ How to Order Interface Regulator


gauge onto a manifold, use caution that the part numbers are different between the odd no. stations and the even no. stations to avoid the gauges from interfering with each other.

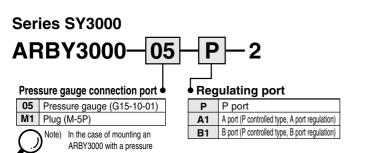


Series SY5000 **ARBY5000** 00 Pressure gauge connection port Regulating port **00** Pressure gauge (G15-10-01) Р P port **M1** Plug (M-5P) A port (P controlled type, A port regulation) **A**1 **B1** B port (P controlled type, B port regulation)

ARBY3000-05-□-2


(For odd number stations)




ARBY3000-06-□-2



ARBY3000-M1-□-2




ARBY5000-00-□-2




ARBY5000-M1-□-2

Series SY7000



Pressure gauge connection port			
00	Pressure gauge (G15-10-01)		
M1	Plug (M-5P)		

riogalating port					
Р	P port				
A 1	A port (P controlled type, A port regulation)				
B1	B port (P controlled type, B port regulation)				

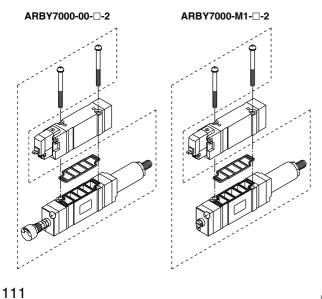

Accessory


Series	Round head combination screw	Gasket
ARBY3000	SY3000-23-10 (M2336)	SX3000-57-4
ARBY5000	M3 x 48.5, Matt nickel plated	SX5000-57-6
ARBY7000	M4 x 57, Matt nickel plated	SX7000-57-4



Mounting screw tightening torques

M2: 0.16 N·m M3: 0.8 N·m M4: 1.4 N·m

Base Mounted Manifold Exploded View

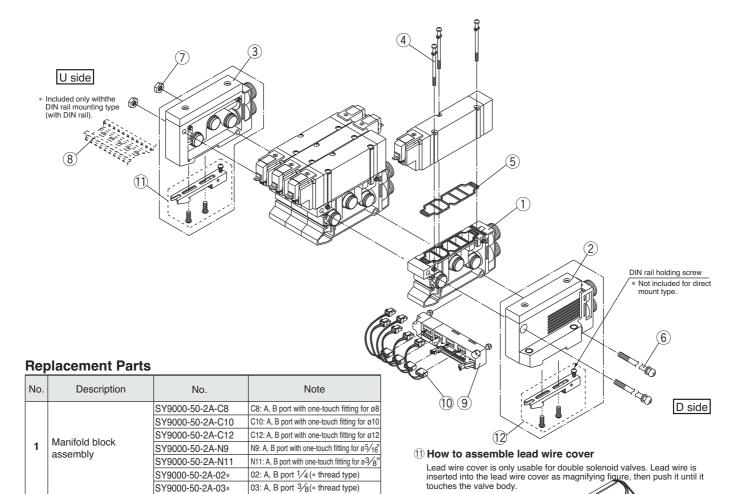

M3 x 42, Matt nickel plated

at the end of part number corresponds with the

number of manifold station. Specify the same

Refer to page 110.

9 Wiring unit assembly SY9000-36-□A □ at the end of part number corresponds with the number of manifold station. Specify the same number as the number of stations (4 to 12 station 11 Lead wire cover SY9000-41-1 □ Clamp sub assembly SY9000-30-1A □ Included only with the DIN rail mounting type.

SY9000-18-2

SY9000-11-2

SY9000-23-

SY9000-25-1

VZ1000-11-4-□

4 Round head combination screw

5

6

7


Gasket

DIN rail

Tension bolt

Hexagon nut

② SUP/EXH block assembly no. (D side mounting)

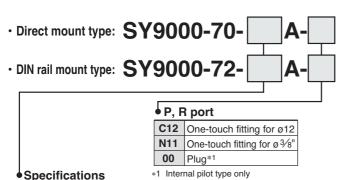

1	Internal pilot type
3	External pilot type
4	Internal pilot / Built-in silencer type
5	External pilot / Built-in silencer type

3 SUP/EXH block assembly no. (U side mounting)


double solenoid valve, etc., order separately lead wire cover as well.

For type 43P (Flat cable manifold) of Series SY9000, the lead wire cover is

attached for bundling the lead wires for each solenoid. In case such as adding

Lead wire

Caution

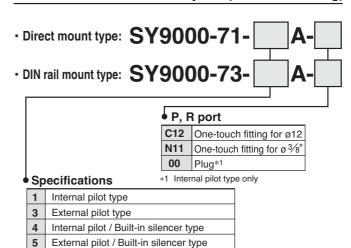

How to Increase Manifold Bases (Series SY9000 only) Manifold case can be added at any location.

When a type 43 manifold base is added, tension bolts as well as manifold block assembly will be required. Order the tension bolt suitable for the stations after a station was increased (decreased), since the length of a tension bolt differs by the number of stations. (For changing the number of stations for a type 43P manifold, wiring unit for the stations and lead assembly will be required.)

1 Loosen the tension bolts connecting the manifold base, and pull out both of 2 tension bolts.

(When equipped with a DIN rail, loosen one DIN rail holding screw on either U side or D side.)

Separate the blocks at the location where station expansion is desired.

Mount additional manifold block assembly

Press block-to-block so that there's no gap. After connection, insert a tension bold for desired stations and then tighten it.


(When equipped with a DIN rail, be sure to tighten the DIN rail holding screws after tightening the tension bolts. Tightening torque: 1.4 N·m)

⚠ Caution

- 1. Be sure to shut off the power and air supplies before disassembly. Furthermore, since air may remain inside the actuator, piping and manifold, confirm that the air is completely exhausted before performing any work.
- 2. When disassembly and assembly are performed, air leakage may result if connections between blocks and tightening of the end block's holding screw, is inadequate.
- 3. By adding wiring unit assembly to type 43 manifold, it can be changed to type 43P manifold, too.

How to Replace A, B Port Fitting Assembly

By replacing manifold block fitting assemblies or the threaded port block assembly of a type 43(P) manifold, the port size of the A and B ports can be changed. To replace these parts, remove the clip with a flat head screwdriver after the valve has been removed. Insert the fitting assemblies or threaded port block assembly, and then reinsert the clip so that it does not protrude from the manifold block.

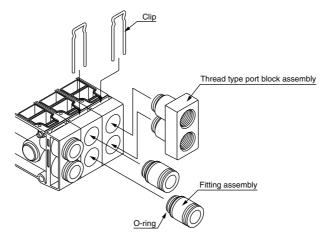

Fitting Assembly Part No.

Port size	No.	Note					
One-touch fitting assembly for ø8	VVQ4000-50B-C8						
One-touch fitting assembly for ø10	VVQ4000-50B-C10						
One-touch fitting assembly for ø12	VVQ4000-50B-C12						
One-touch fitting for ø 5/16"	VVQ4000-50B-N9						
One-touch fitting for ø 3/8"	VVQ4000-50B-N11						
1/4 threaded type port block assembly	SY9000-58A-02*	-* at the end of part number denotes the thread type.					
3/8 threaded type port block assembly	SY9000-58A-03*	-* at the end of part number denotes the thread type.					
Plug assembly	SY9000-62-1A						

Be careful to avoid damage or contamination of O-rings, as this can cause air leakage.

Although replacing the One-touch fittings of P, R port is possible, use caution in the case where solenoid valves are Note 2) used at the same time when using the smaller sized fittings than the standard size (ø12). Because they may not be able to supply or exhaust air sufficiently in comparison to the valve performance. Also, although the fittings used for A, B port are the same as for P, R port, it is not possible to use the threaded type port block assembly.








5 Port Solenoid Valve Series **SY3000/5000 Base Mounted** Stacking Type/DIN Rail Mounted Individual Wiring



How to Order Manifold

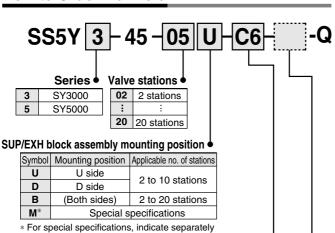

by the manifold specification sheet.

One-	touch fitting	(Metric size) <u>One-to</u>	ouch fi
Symbol	Port size	Applicable series	Symbol	Por

Symbol	Port size	Applicable series			
C4	One-touch fitting for ø4				
C6	One-touch fitting for ø6	SY3000			
М	Mixed				
C4	One-touch fitting for ø4				
C6	One-touch fitting for ø6	1 5 7 5000			
C8	One-touch fitting for ø8				
М	Mixed				

One-touch fitting (Inch size)								
Port size	Applicable series							
One-touch fitting for ø 5/32"								
One-touch fitting for ø 1/4"	SY3000							
Mixed								
One-touch fitting for ø 5/32"	-							
One-touch fitting for ø 1/4"								
One-touch fitting for ø 5/16"								
Mixed								
	Port size One-touch fitting for $0.5/32$ '' One-touch fitting for $0.1/4$ '' Mixed One-touch fitting for $0.5/32$ '' One-touch fitting for $0.5/32$ '' One-touch fitting for $0.5/16$ '' One-touch fitting for $0.5/16$ ''							

A, B port size


* In the case of mixed specifications (M), indicate separately on the manifold specification sheet.

Option

When a longer DIN rail is desired than the specified stations, specify the station number to be required. (20 stations at maximum)



How to Order Valve Manifold Assembly (Example)

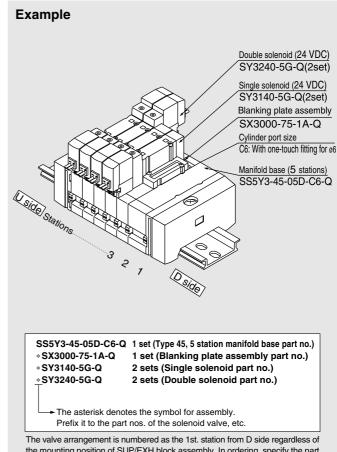


the mounting position of SUP/EXH block assembly. In ordering, specify the part nos. in the order from the 1st. station on D side. Besides, when the arrangement will be complicated, fill out the manifold specification sheet to instruct us.




How to Order Valve



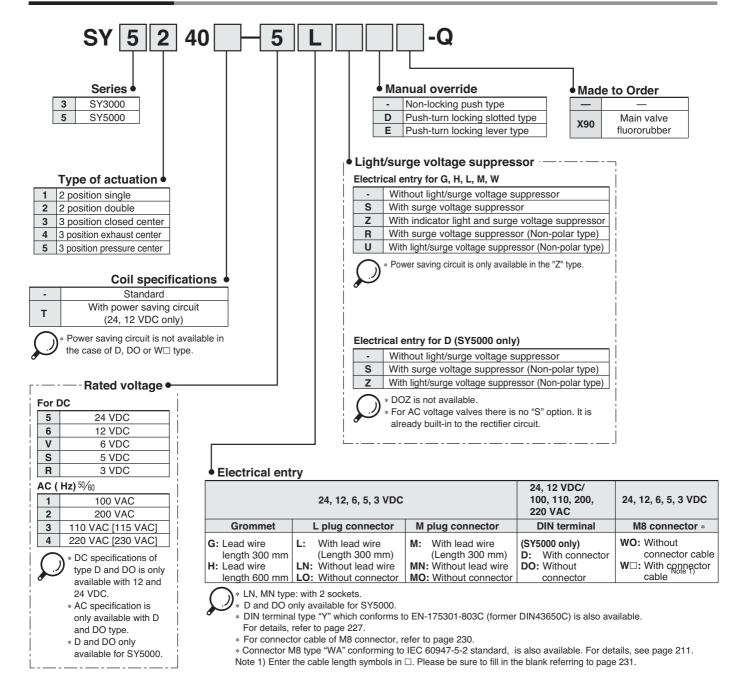





Manifold Specifications

Model		SS5Y3-45	SS5Y5-45		
Applicable valve		SY3□40	SY5□40		
Manifold type		Stacking type/D	OIN rail mounted		
P (SUP)/R (EXH)	Common SUP	, Common EXH		
Valve stations		2 to 20 sta	ations Note 1)		
A, B port	Location	Base			
Porting specifications	Direction	Side			
	P, R port	C8 (One-touch fitting for ø8)	C10 (One-touch fitting for ø10)		
Port size	A, B port	C4 (One-touch fitting for ø4) C6 (One-touch fitting for ø6)	C4 (One-touch fitting for ø4) C6 (One-touch fitting for ø6) C8 (One-touch fitting for ø8)		
Manifold base we W (g), n: Stations		2 to 10 stations: W = 22n + 118 11 to 20 stations: W = 22n + 140	2 to 10 stations: W = 47n + 156 11 to 20 stations: W = 47n + 190		



Note 1) For more than 11 stations, supply pressure to P port on both sides and exhaust from R port on both sides.

Flow Characteristics

	Port	Port size Flow characteristics								
Model	1 ,5 ,3	4 ,2	$1 \rightarrow 4/2 \ (P \rightarrow A/B)$			4/2 →	5/3 ((A/B –	→ EA/EB)	
	(P ,EA ,EB)	(A ,B)	C (dm3/(s-bar))	b	Cv	Q[d/min(ANR)]*	C (dm3/(s-bar))	b	Cv	Q[d/min(ANR)]*
SS5Y3-45	C8	C6	0.88	0.21	0.22	212	0.95	0.18	0.22	225
SS5Y5-45	C10	C8	2.2	0.24	0.53	539	2.5	0.18	0.58	592



Note) The value is for manifold base with 5 stations and individually operated 2 position type.

^{*} These values have been calculated according to ISO6358 and represent the flow rate measured in standard conditions at an upstream pressure of 0.6 MPa (relative pressure) and a differential pressure of 0.1MPa.

SY3000/5000 Base Mounted

Manifold Option

Individual SUP spacer assembly = Individual EXH spacer assembly = SUP blocking disk

EXH port

Series Assembly part no.

SY3000 SY3000-39-2A-Q

SY5000 SY5000-39-16*A-Q

Note) The EXH port may be either on the lead wire side or on the end plate

condition shown in the figure.)

side. However, as the CE-compliant

* Thread type

Ν

Т

Caution Mounting screw tightening torques M2: 0.16 N·m M3: 0.8 N·m M4: 1.4 N·m

products (-Q) must be mounted in the specified direction, the port directions cannot be changed. (An assembly is shipped under the

Port size t

M5 111


1/8

Rc

G

NPT


NPTF



	Assembly part no.		t
	SY3000-38-2A-Q		11
SY5000	SY5000-38-16*A-Q	1/8	15


Note) The SUP port may be either on the lead wire side or on the end plate side. However, as the CE-compliant products (-Q) must be mounted in the specified direction, the port directions cannot be changed. (An assembly is shipped under the condition shown in the figure.)

Blanking plate assembly




	1
Series	Assembly part no.
SY3000	SX3000-75-1A-Q
SY5000	SX5000-76-5A-Q

Dimensions/DIN rail



Refer to L dimensions

 \ast Fill in \square with an appropriate no. listed on the table of DIN rail dimensions shown below.



No.	0	1	2	3	4	5	6	7	8	9	10
L Dimension	98	110.5	123	135.5	148	160.5	173	185.5	198	210.5	223
No.	11	12	13	14	15	16	17	18	19	20	21
L Dimension	235.5	248	260.5	273	285.5	298	310.5	323	335.5	348	360.5
No.	22	23	24	25	26	27	28	29	30	31	32
L Dimension	373	385.5	398	410.5	423	435.5	448	460.5	473	485.5	498
No.	33	34	35	36	37	38	39	40	41	42	43
L Dimension	510.5	523	535.5	548	560.5	573	585.5	598	610.5	623	635.5
No.	44	45	46	47	48	49	50	51	52	53	54
L Dimension	648	660.5	673	685.5	698	710.5	723	735.5	748	760.5	773
No.	55	56	57	58	59	60	61	62	63	64	65
L Dimension	785.5	798	810.5	823	835.5	848	860.5	873	885.5	898	910.5
No.	66	67	68	69	70	71					
L Dimension	923	935.5	948	960.5	973	985.5					

^{*} Refer to L1 dimension on pages starting with page 121 for lengths that correspond to the number of manifold stations.

By installing a SUP blocking disk in the pressure supply passage of a manifold valve, it is possible to supply two or more different high and low pressures to one manifold.



Series	No.
SY3000	SX3000-77-1A
SY5000	SX5000-77-1A

EXH blocking disk

By installing an EXH blocking disk in the exhaust passage of a manifold valve, it is possible to divide the valve's exhaust so that it does not affect another valve. (Two blocking disks are needed to divide both exhausts.)



Series	No.
SY3000	SX3000-77-1A
SY5000	SX5000-77-1A

Label for block disk

The labels shown below are used on manifold stations containing SUP/EXH blocking disk(s) to show their location. (3 pcs. each)

VZ3000-123-1A

Label for SUP block disk Label for EXH block disk Label for SUP/EXH block disk










When a block disk is concurrently ordered by specifying on the manifold specification sheet, etc., a label will be stuck on the position where block disk is mounted.

Silencer with One-touch fitting


The silencer plugs directly into the One-touch fittings of the manifold.



Series	Series Model		Α	В	С
For SY3000 (Ø8)	AN203-KM8	14 mm ²	ø16	26	51
For SY5000 (Ø10)	AN200-KM10	26 mm ²	ø22	53.8	80.8
	AN300-KM10	30 mm ²	ø25	70	97

Pluq

These are inserted in unused cylinder ports and SUP, EXH ports. Purchasing order is available in units of 10 pieces.



Dimensions


Applicable fittings size ød	Model	Α	L	D
4	KQ2P-04	16	32	6
6	KQ2P-06	18	35	8
8	KQ2P-08	20.5	39	10
10	KQ2P-10	22	43	12
1/8"	KQ2P-01	16	31.5	5
5/32"	KQ2P-03	16	32	6
1/4"	KQ2P-07	18	35	8.5
5/16"	KQ2P-09	20.5	39	10




Type 45 Base Mounted

Manifold Option

■ How to Order Interface Regulator (SY3000, 5000 only)

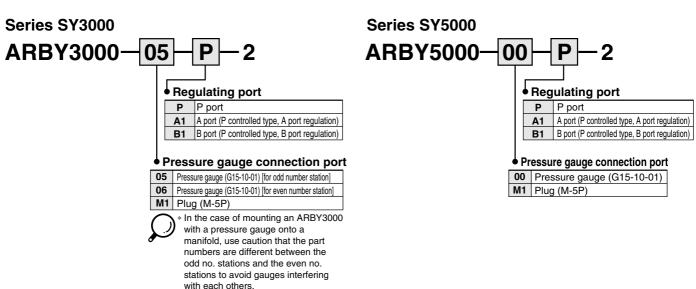

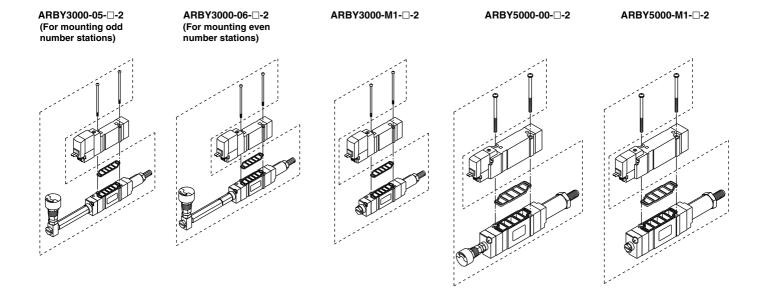

Accessory

Series	Round head combination screw	Gasket
ARBY3000	SY3000-23-10 (M2 x 36)	SX3000-57-4
ARBY5000	M3 x 48.5, Matt nickel plated	SX5000-57-6



Mounting screw tightening torques

M2: 0.17 N·m M3: 0.8 N·m




Type 45 Base Mounted

Dimensions: Series SY3000


SS5Y3-45- Stations D-C4, N3-Q

SS5Y3-45- Stations U-C4, N3 -Q

(Station n) (Station 1)

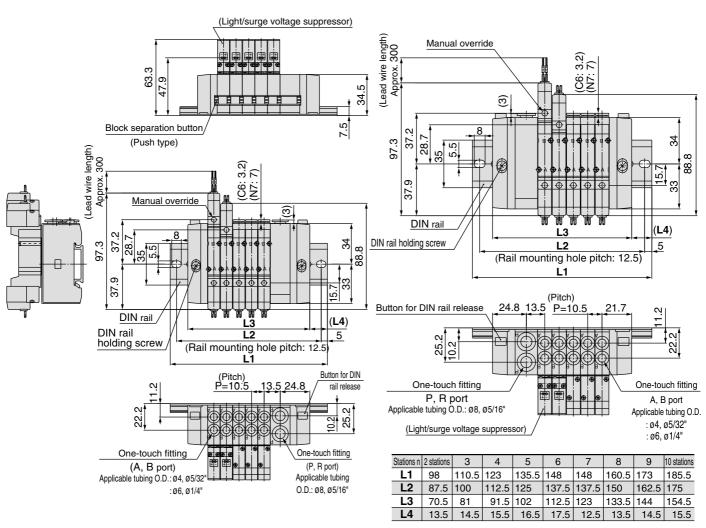



With interface regulator (with gauge)

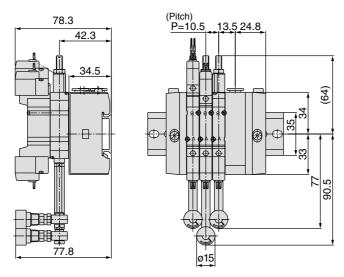

Dimensions: Series SY3000


SS5Y3-45- Stations B-C4, N3-Q

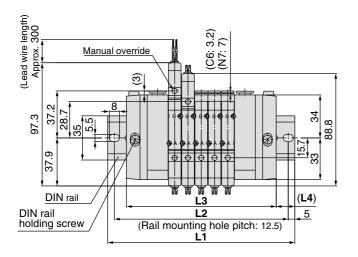

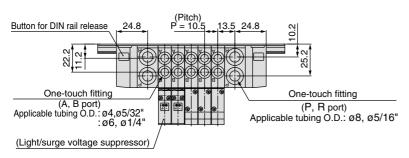


Stations n	2 stations	3	4	5	6	7	8	9	10 stations	
L1	110.5	123	135.5	148	160.5	173	185.5	185.5	198	
L2	100	112.5	125	137.5	150	162.5	175	175	187.5	
L3	87	97.5	108	118.5	129	139.5	150	160.5	171	
L4	11.5	12.5	13.5	14.5	15.5	16.5	17.5	12.5	13.5	
Stations n	11 stations	12	13	14	15	16	17	18	19	20 stations
L1	210.5	223	235.5	248	248	260.5	273	285.5	298	310.5
L2	200	212.5	225	237.5	237.5	250	262.5	275	287.5	300
L3	181.5	192	202.5	212	223.5	234	244.5	255	265.5	276
	101.5	192	202.5	213	220.0	204	277.0	200	200.0	_, _


L plug connector 63.3 47.9



M plug connector




M8 connector (WO)




Note) Refer to back page 12 for dimensions of connector types.

Type 45 Base Mounted

Dimensions: Series SY5000

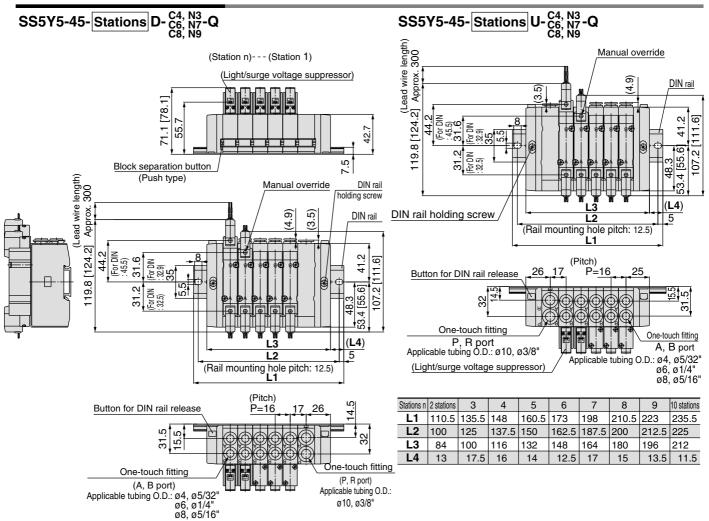



With interface regulator (with gauge)

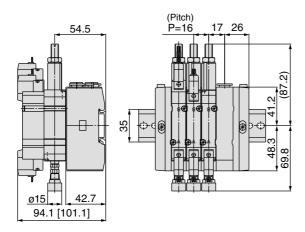

Dimensions: Series SY5000


SS5Y3-45- Stations B-C4, N3 -Q

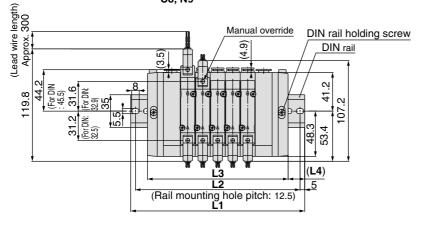

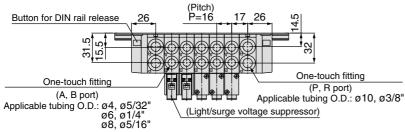


Stations n	2 stations	3	4	5	6	7	8	9	10 stations	
L1	135.5	148	160.5	185.5	198	210.5	223	248	260.5	
L2	125	137.5	150	175	187.5	200	212.5	237.5	250	
L3	102	118	134	150	166	182	198	214	230	
L4	16.5	15	13	17.5	16	14	12.5	17	15	
Stations n	11 stations	12	13	14	15	16	17	18	19	20 stations
L1	273	285.5	310.5	323	335.5	360.5	373	385.5	398	423
L1 L2	273 262.5		310.5 300	323 312.5		360.5 350	373 362.5		398 387.5	
	_						-			


L plug connector



M plug connector




M8 connector (WO)




Note) Refer to back page 12 for dimensions of connector types.

DIN terminal (D)

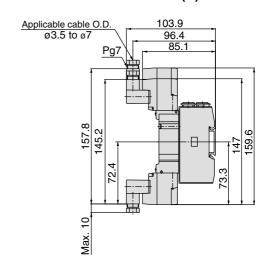

Type 45 Base Mounted

DIN Rail Manifold Exploded View Type 45

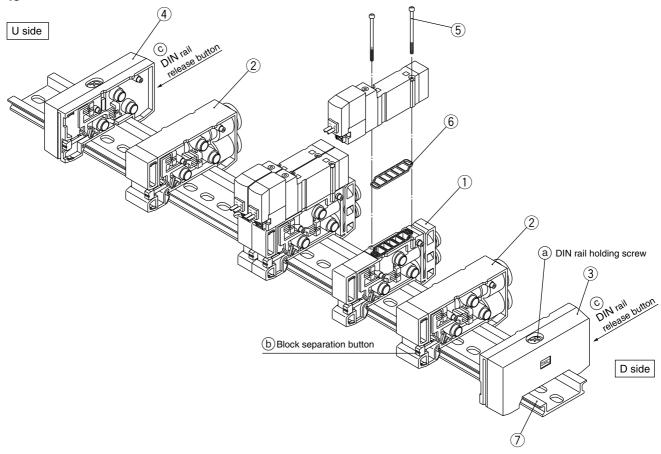

Replacement Parts

		No.		N.
No.	Description	SY3000	SY5000	Note
1	Manifold block assembly	SX3000-50-1A-□□-Q		□□: SY3000 (Metric size) C4: With one-touch fitting for ø4 C6: With one-touch fitting for ø6 SY5000 (Metric size) C4: With one-touch fitting for ø4 SY5000 (Metric size) C4: With one-touch fitting for ø4 C6: With one-touch fitting for ø6 C8: With one-touch fitting for ø8 C8: With one-touch fitting for ø8 (Gasket 6 is supplied as an accessory.) N3: With one-touch fitting for ø5/32" N7: With one-touch fitting for ø 1/4" N9: With one-touch fitting for ø 5/16"
2	SUP/EXH block assembly	(Metric size) SX3000-51-1A (Inch size) SX3000-51-15A	(Metric size) SX5000-51-1A (Inch size) SX5000-51-15A	P, R port SY3000 (Metric size) With one-touch fitting for ø8 (Inch size) With one-touch fitting for ø5/16" P, R port SY5000 (Metric size) With one-touch fitting for ø10 (Inch size) With one-touch fitting for ø3/8"
3	End block assembly R	SX3000-52-1A-Q	SX5000-52-1A-Q	For D side
4	End block assembly R	SX3000-53-1A-Q	SX5000-53-1A-Q	For U side
5	Round head combination screw	SY3000-23-4	M3 x 26 (Matt nickel plated)	
6	Gasket	SX3000-57-4	SX5000-57-6	
7	DIN rail	VZ1000	-11-1-□	Refer to page 118.

SY3000/5000 Base Mounted II



DIN Rail Manifold Exploded View

How to Increase Manifold Bases Station expansion is possible at any position.


- 1 Loosen DIN rail holding screw (a) fixing the manifold base until it begins to turn idly. (While pressing DIN rail releasing buttons ©, at two locations, separate the manifold base from the DIN rail.)
- Press manifold block assembly dividing button (b), that are at the location where manifold bases are to be added, until button (b) locks, and then separate the block assemblies.
- 3 Mount additional manifold block assembly on the DIN rail as shown in the figure 1.
- Press the block assemblies until a click sound is produced, and tighten the DIN rail holding screw (a) to fix them to the DIN rail. **△Caution** (Tightening torque: 1.4 N·m)

(While lightly holding the blocks after fixing an end block on one side, tighten the other end block for for better sealing.)

Note 1) When there are 10 or fewer manifold block assemblies, and more are added to make a total of 11 or more, a supply/exhaust block assembly must also be added.


Note 2) When disassembly and assembly are performed, air leakage may result if connections between blocks and tightening of the end block's holding screw, is inadequate. Before supplying air, confirm that there are no gaps, etc. between blocks, and that manifold blocks are securely fastened to the DIN rail. Then supply air and confirm that there is no air leakage before operating.

Fig. (1) Block mounting procedure



Hook the DIN rail here and press down in the direction of the arrow until a click sound is heard

How to Change Fitting Assembly



Type 45 manifold permits change in the A and B port sizes by changing the manifold block fitting assembly. After removing the valve, remove the clip with a screwdriver, etc. For mounting a new fitting assembly, insert it and then insert a clip until it will not come out of the manifold block.


Fitting Assembly Part No.

Metric size

SY3000	One-touch fitting for ø4	VVQ1000-50A-C4
513000	One-touch fitting for ø6	VVQ1000-50A-C6
SY5000	One-touch fitting for ø4	VVQ1000-51A-C4
	One-touch fitting for ø6	VVQ1000-51A-C6
	One-touch fitting for ø8	VVQ1000-51A-C8

Inch size

SY3000	One-touch fitting for ø5/32"	VVQ1000-50A-N3
513000	One-touch fitting for ø 1/4"	VVQ1000-50A-N7
	One-touch fitting for ø5/32"	VVQ1000-51A-N3
SY5000	One-touch fitting for ø 1/4"	VVQ1000-51A-N7
	One-touch fitting for ø5/16"	VVQ1000-51A-N9



Note 2) Use caution that O-rings must be free from scratches and dust. Otherwise, air leakage may result.






5 Port Solenoid Valve Series SY3000/5000 **Base Mounted Stacking Type/DIN Rail Mounted** Connector Box





How to Order Manifold



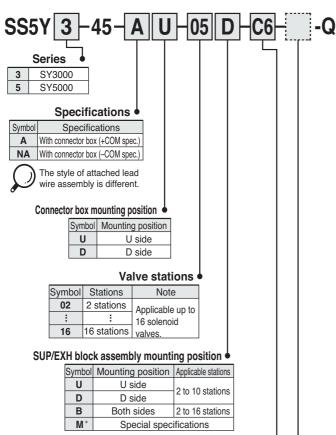

* For special specifications, indicate separately by the manifold specification sheet

A/B port size

One-touch fitting (Metric size)

Symbol	Port size	Applicable series
C4	One-touch fitting for ø4	
C6	One-touch fitting for ø6	SY3000
M	Mixed	
C4	One-touch fitting for ø4	
C6	One-touch fitting for ø6	SY5000
C8	One-touch fitting for ø8	313000
M	Mixed	

One-touch fitting (Inch size)


Symbol	Port size	Applicable series
N3	One-touch fitting for ø ⁵ /32"	
N7	One-touch fitting for ø ¹ /4"	SY3000
M	Mixed	
N3	One-touch fitting for ø ⁵ /32"	
N7	One-touch fitting for ø ¹ /4"	SAEUUU
N9	One-touch fitting for ø ⁵ /32"	313000
M	Mixed	

* In the case of mixed specifications, indicate separately on the manifold specification sheet.

Option •

When a longer DIN rail is desired than the specified stations, specify the station number to be required. (Max. 20 stations)


For external pilot specifications and built-in silencer, refer to page 205

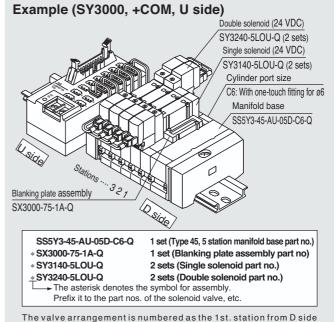

regardless of the mounting position of connector box. In ordering, specify the part nos. in the order from the 1st. station on D side. Besides, when the arrangement will be complicated, fill out the manifold specification sheet to

 $SS5Y_5^3-45-A_D^{U}-\square\square-C\square$ is assembled with solenoid valve and lead wire $assembly\,when\,shipping.\,When\,ordering\,manifold\,only\,(without$ valves/wires/options), refer to how to order on page 115 and list the connector box (VZ3000-106-1A) and the rail stopper (TXE1-SMC) below the manifold to allow for the connector box mounting at U side. (Be sure to order DIN rail 3 station longer than number of the manifold stations.) In this case, please note that dimensions, L1 and L2 on pages 131 and 132 may vary slightly.) For other components, refer to page 133

How to Order Valve

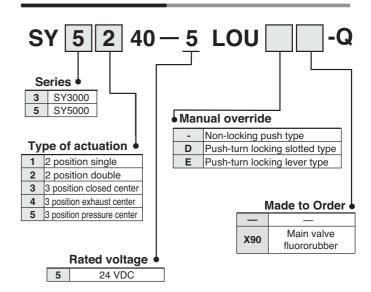





Manifold Specifications

Model		SS5Y3-45-A	SS5Y5-45- ^A A			
Applicable valve		SY3□40	SY5□40			
Manifold type		Stacking type/D	IN rail mounted			
P (SUP)/R (EXH)	Common SUP,	Common EXH			
Valve stations		2 to 16 sta	tions Note 1, 2)			
A, B port	Location	Ba	se			
Porting specifications	Direction	Si	de			
	P, R port	C8 (One-touch fitting for ø8)	C10 (One-touch fitting for ø10)			
Port size	A, B port	C4 (One-touch fitting for ø4) C6 (One-touch fitting for ø6)	C4 (One-touch fitting for ø4) C6 (One-touch fitting for ø6) C8 (One-touch fitting for ø8)			
Manifold base weight W (g) n: Stations		2 to 10 stations: W = 26n + 207 11 to 20 stations: W = 26n + 229	2 to 10 stations: W = 52n + 245 11 to 16 stations: W = 52n + 279			
Applicable flat rib	bon cable	Flat ribbon cable connector Socket: 20 pins MIL type with strain relief conforming to MIL-C-83503				
Wiring specificat	ions	+COM specifications (Type 45-A), -COM specifications (Type 45-NA)				

Note 1) For more than 11 stations, supply pressure to P port on both sides and exhaust from R port on both sides.

Note 2) There is a limit depending on the number of solenoids. Refer to "How to Order".


Flow Characteristics

	Port	size	Flow c				racteristics				
Model	1, 5, 3	4, 2	1 → 4/2 (P → A/B)			4/2 →	5/3 (/	4/B —	→ EA/EB)		
	(P, EA, EB)	(A, B)	C (dm3/(s·bar))	b	Cv	Q[dmin(ANR)]*	C (dm3/(s·bar))	b	Cv	Q[d/min(ANR)]*	
SS5Y3-45-□	C8	C6	0.88	0.21	0.22	212	0 .95	0.18	0.22	225	
SS5Y5-45-□	C10	C8	2.2	0.24	0.53	539	2.5	0.18	0.58	592	

Note) The value is for manifold base with 5 stations and individually operated 2 position type.


* These values have been calculated according to ISO6358 and represent the flow rate measured in standard conditions at an upstream pressure of 0.6 MPa (relative pressure) and a differential pressure of 0.1MPa.

Manifold Wiring Diagram (Circuit diagram for the reference layout)

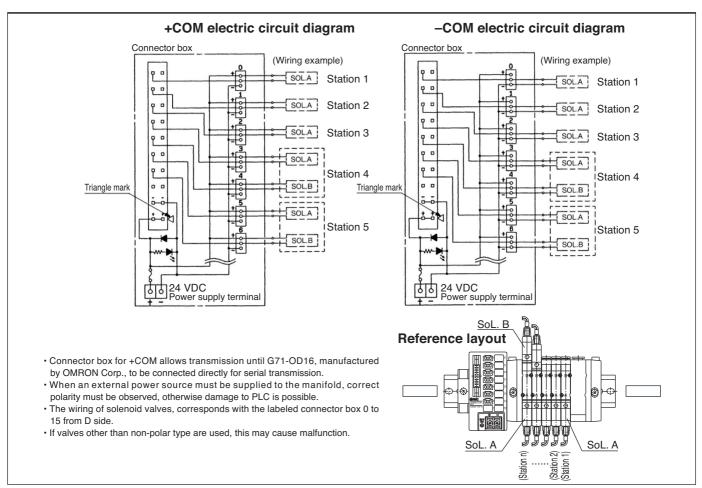

Manifold Option

Individual SUP spacer assembly Individual EXH spacer assembly SUP blocking disk

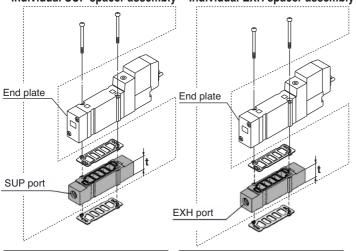


Series	Assembly part no.	Port size	t
SY3000	SY3000-38-2A-Q	M5	11
SY5000	SY5000-38-16*A-Q	1/8	15

Note) The SUP port may be either on the lead wire side or on the end plate side. However, as the CE-compliant products (-Q) must be mounted in the specified direction, the port directions cannot be changed. (An assembly is shipped under the condition shown in the figure.)

Series	Assembly part no.	Port size	t
SY3000	SY3000-39-2A-Q	M5	11
SY5000	SY5000-39-16*A-Q	1/8	15

Note) The EXH port may be either on the lead wire side or on the end plate side. However, as the CE-compliant products (-Q) must be mounted in the specified direction, the port directions cannot be changed. (An assembly is shipped under the condition shown in the figure.)

■ Cable assembly AXT100-FC20

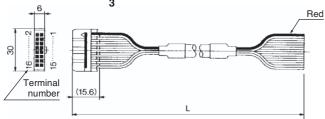

Connector Assembly for Flat Ribbon Cables

Cable length (L)	Assembly part no.	Note
1.5 m	AXT100-FC20-1	Cable 00 save
3 m	AXT100-FC20-2	Cable 20 core x 28 AWG
5 m	AXT100-FC20-3	X ZO AVVG

- * For other commercial connectors, use a 20 pins with strain relief conforming to MIL-C-83503
- * Cannot be used for movable wiring
- * Lengths other than the above are also available. Please contact SMC for details.

Connector Manufacturers' Example

- · 3M Japan Limited
- · Fujitsu Limited
- · Japan Aviation Electronics Industry, Limited
- · J.S.T. Mfg. Co., Ltd.
- · Oki Electric Cable Co., Ltd.

By installing a SUP blocking disk in the pressure supply passage of a manifold valve, it is possible to supply two or more different high and low pressures to one manifold.



Series	Part no.
SY3000	SX3000-77-1A
SY5000	SX5000-77-1A

■ EXH blocking disk

By installing an EXH blocking disk in the exhaust passage of a manifold valve, it is possible to divide the valve's exhaust so that it does not affect another valve. (Two blocking disks are needed to divide both exhausts.)



Series	Part no.
SY3000	SX3000-77-1A
SY5000	SX5000-77-1A

Label for block disk

The labels shown below are used on manifold stations containing SUP/EXH blocking disk(s) to show their location. (3 pcs. each)

VZ3000-123-1A

Label for SUP block disk Label for EXH block disk Label for SUP/EXH block disk








When a block disk is concurrently ordered by specifying on the manifold specification sheet, etc., a label will be stuck on the position where block disk is mounted.


Silencer with One-touch fitting

The silencer plugs directly into the One-touch fittings of the manifold.



Series	Model	Effective area	Α	В	С
For SY3000 (Ø8)	AN203-KM8	14 mm ²	ø16	26	51
Ear CVE000 (~10)	AN200-KM10	26 mm ²	ø22	53.8	80.8
For SY5000 (Ø10)	AN300-KM10	30 mm ²	ø25	70	97

These are inserted in unused cylinder ports and SUP, EXH ports. Purchasing order is available in units of 10 pieces.



Dimensions

Applicable fittings size ød	Model	Α	L	D
4	KQ2P-04	16	32	6
6	KQ2P-06	18	35	8
8	KQ2P-08	20.5	39	10
10	KQ2P-10	22	43	12
1/8"	KQ2P-01	16	31.5	5
5/32"	KQ2P-03	16	32	6
1/4"	KQ2P-07	18	35	8.5
5/16"	KQ2P-09	20.5	39	10





When mounting a valve or spacer on the manifold base or sub-plate, etc., those mounting directions are determined. If mounted in the wrong direction, the equipment to be connected may cause malfunction. Refer to external dimensions, and then mount it.



Manifold Option

■ How to Order Interface regulator (SY3000, 5000 only)

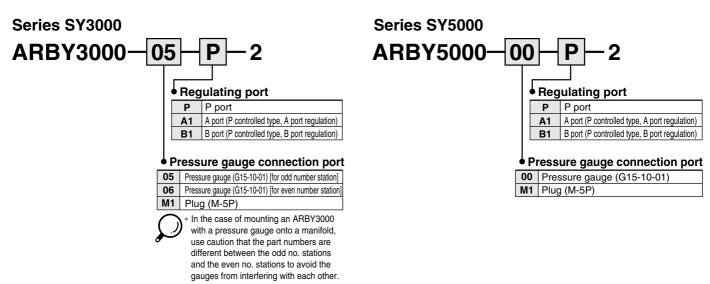

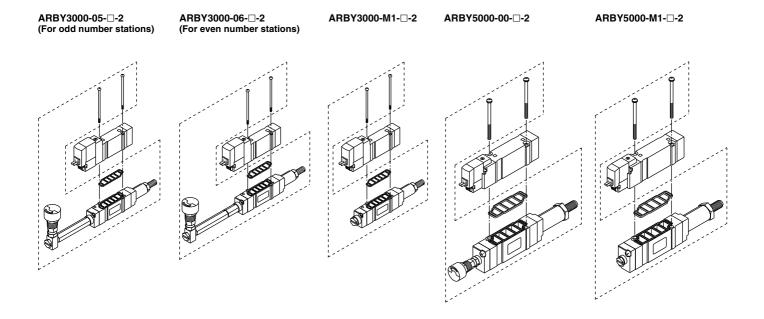

Accessory

Series	Round head combination screw	Gasket
ARBY3000	SY3000-23-10 (M2 x 36)	SX3000-57-4
ARBY5000	M3 x 48.5, Matt nickel plated	SX5000-57-6




Mounting screw tightening torques

M2: 0.16 N·m M3: 0.8 N·m






Dimensions: Series SY3000

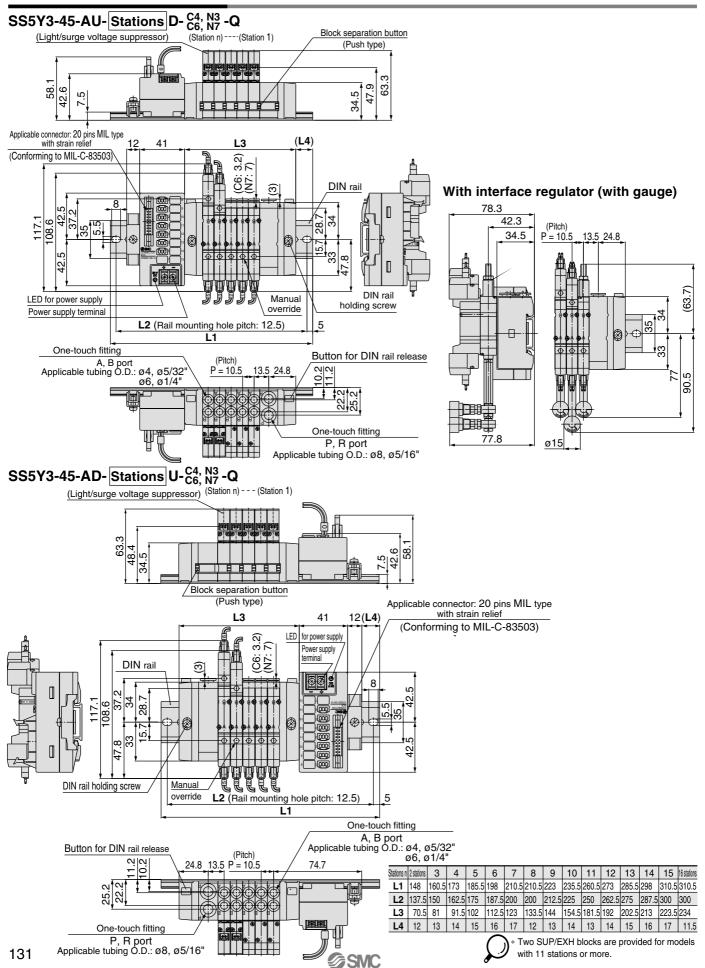




Dimensions: Series SY5000

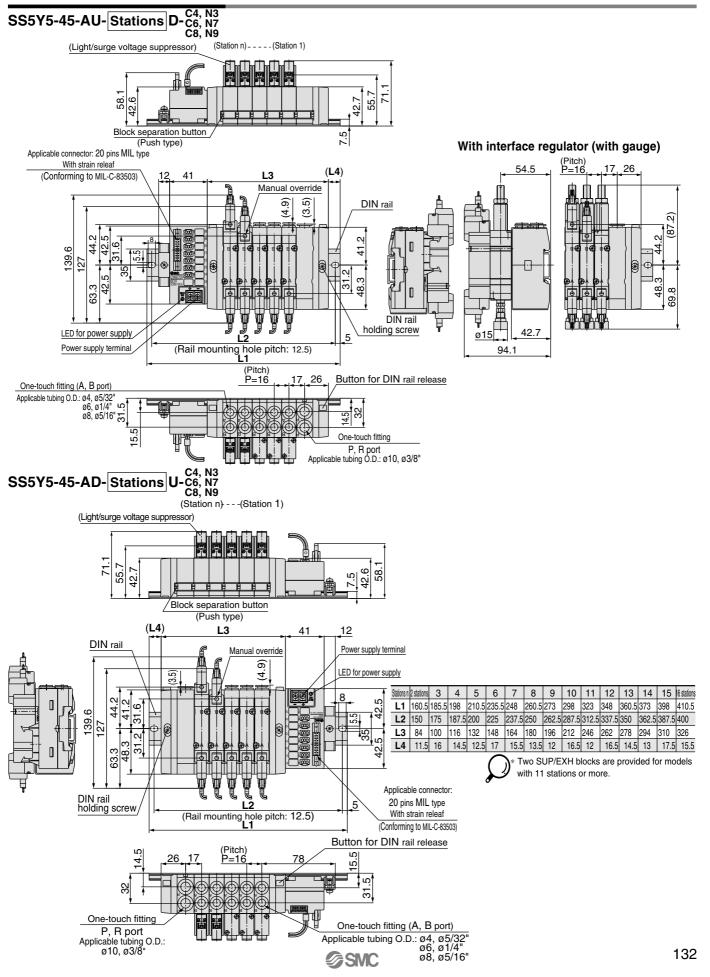



DIN Rail Manifold Exploded View

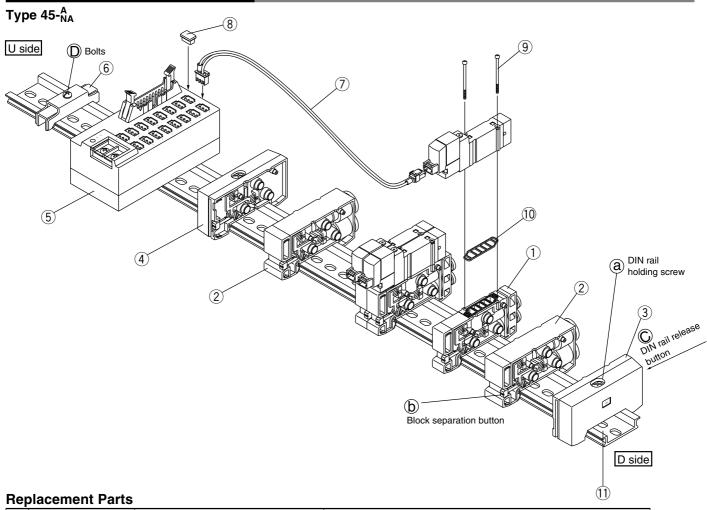

<u>, 106</u>	epiacement Faits					
No.	Description	No.		Note		
INO.	Description	SY3000	SY5000	Note		
1	Manifold block assembly	SX3000-50-1A-□□-Q	SX5000-50-1A-□□-Q	•SY3000 (Metric size) C4: With one-touch fitting for Ø4 C6: With one-touch fitting for Ø6 For SY5000 (Metric size) C4: With one-touch fitting for Ø6 For SY5000 (Metric size) C4: With one-touch fitting for Ø4 C6: With one-touch fitting for Ø4 C8: With one-touch fitting for Ø8 C8: With one-touch fitting for Ø8 (Gasket 10 is supplied as an accessory.)		
2	SUP/EXH block assembly	(Metric size) SX3000-51-1A (Inch size) SX3000-51-15A	(Metric size) SX5000-51-1A (Inch size) SX5000-51-15A	P, R port SY3000 (Metric size) With one-touch fitting for ø8 (Inch size) With one-touch fitting for ø5/16" P, R port SY5000 (Metric size) With one-touch fitting for ø10 (Inch size) With one-touch fitting for ø3/6"		
3	End block assembly R	SX3000-52-1A-Q	SX5000-52-1A-Q	For D side		
4	End block assembly L	SX3000-53-1A-Q	SX5000-53-1A-Q	For U side		
5	Connector box	VZ3000	-106-1A	For 24 VDC only		
6	Rail stopper	TXE1	-SMC	Made by Kasuga Electric Works		
		SY3000-43-1A-□	SY3000-43-2A-□	+COM Type D, 2 to 8 stations Type U, 9 to 16 stations		
7	Connector accomply	SY3000-43-2A-□	SY3000-43-3A-□	+COM Type D, 9 to 16 stations Type U, 2 to 8 stations		
<i>'</i>	Connecter assembly	SY3000-43-1NA-	SY3000-43-2NA-	-COM Type D, 2 to 8 stations Type U, 9 to 16 stations		
		SY3000-43-2NA-	SY3000-43-3NA-	-COM Type D, 9 to 16 stations Type U, 2 to 8 stations		
8	Dust cap	VZ3000-63-2				
9	Round head combination screw	SY3000-23-4	M3 x 26, Matt nickel plated			
10	Gasket	SX3000-57-4	SX5000-57-6			
11	DIN rail	VZ1000	-11-1-□	Refer to page 118.		

How to Increase Manifold Bases

Station expansion is possible at any position.

- Loosen DIN rail holding screw (a) fixing the manifold base until it begins to turn idly. (While pressing DIN rail releasing buttons (c), at two locations, separate the manifold base from the DIN rail.)
- Press manifold block assembly dividing button (b), that are at the location where manifold bases are to be added, until button (b) locks, and then separate the block assemblies.
- Mount additional manifold block assembly on the DIN rail as shown in the figure 1.
- Press the block assemblies until a click sound is produced, and tighten the DIN rail holding screw (a) to fix them to the DIN rail.

 Acaution (Tightening torque: 1.4 N·m)

 (While lightly holding the blocks after fixing an end block on one side, tighten the other end block for for better sealing.)
- 5 Untighten the rail stopper bolt (1) to demount the connector box from the DIN rail, and when remounting it, tighten the bolt while pressing it against the rail.


△Caution

- Note 1) When there are 10 or fewer manifold block assemblies, and more are added to make a total of 11 or more, a supply/exhaust block assembly must also be added.
- Note 2) When disassembly and assembly are performed, air leakage may result if connections between blocks and tightening of the end block's holding screw, is inadequate. Before supplying air, confirm that there are no gaps, etc. between blocks, and that manifold blocks are securely fastened to the DIN rail. Then supply air and confirm that there is no air leakage before operating.
- Note 3) One connector assembly is necessary for one solenoid.

 When a number is necessary for the connector assembly mark tube, suffix the number to the part no. (0 to 15 are provided as mark tube numbers.)

Ex) +COM spec.: D type for 2 to 8 stations: No. 10 SY3000-43-1A-10

Fig. (1) Block mounting procedure



How to Change Fitting Assembly

Type 45 manifold permits change in the A and B port sizes by changing the manifold block fitting assembly.

After removing the valve, remove the clip with a screwdriver, etc. For mounting a new fitting assembly, insert it and then insert a clip until it will not come out of the manifold block.

Fitting Assembly Part No.

Metric size


SY3000 One-touch fitting for ø4 VVQ1000-50A-		VVQ1000-50A-C4
513000	One-touch fitting for ø6	VVQ1000-50A-C6
	One-touch fitting for ø4	VVQ1000-51A-C4
SY5000	One-touch fitting for ø6	VVQ1000-51A-C6
	One-touch fitting for ø8	VVQ1000-51A-C8

Inch size

SY3000	One-touch fitting for ø5/32"	VVQ1000-50A-N3
513000	One-touch fitting for ø 1/4"	VVQ1000-50A-N7
	One-touch fitting for ø5/32"	VVQ1000-51A-N3
SY5000	One-touch fitting for ø 1/4"	VVQ1000-51A-N7
	One-touch fitting for ø5/16"	VVQ1000-51A-N9

Note 1) P and R ports cannot be changed.


Note 2) Use caution that O-rings must be free from scratches and dust. Otherwise, air leakage may result.

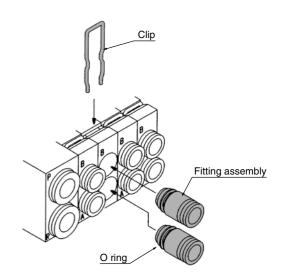



EX510 Gateway-type Serial Transmission System Base Mounted Manifold/Stacking Type Series SY3000/5000

How to Order Manifold

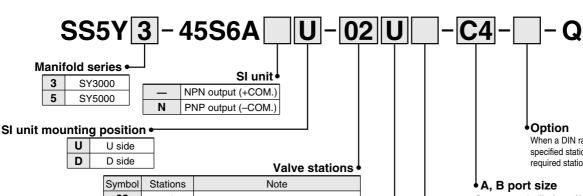


Symbol	Stations	Note
02	2 stations	
:	:	Double wiring Note 1)
08	8 stations	
02	2 stations	On a siting at Language Note 2)
:		Specified layout Note 2) (Compatible with 16 solenoid valves)
16	16 stations	

• The number of the blanking plate assembly is also included. Note 1) Double wiring: Use of a single solenoid will result in an unused control signal. If this is not desired, order with a specified layout.

Note 2) Specified layout: Indicate wiring specifications on the manifold specification sheet. (Note that double and 3 position valves cannot be used where single solenoid wiring has been specified.)

How to Order Manifold Assembly (Order Example)

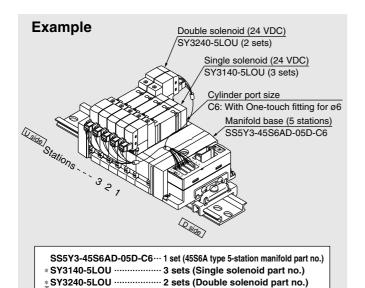

Add the valve and option part number under the manifold base part number. When entry of part numbers becomes complicated, indicate by the manifold specification sheet. For a manifold for an EX510, the length of the lead wire for a connector assembly depends on the number of stations. Therefore, the manifold assembly is shipped with the valves (including blanking plates) and connector assembly mounted on it, as the standard specification. Be sure to specify the part nos. of the solenoid valves to be mounted.

The asterisk denotes the symbol for assembly. Prefix to the part no. of the

When a DIN rail that is longer than the specified stations is desired, specify the required station number. (Max. 20 stations)

One-touch fitting (Metric size)

C4	One-touch fitting for ø4	
C6	C6 One-touch fitting for ø6	
M	Mixed	
C4	One-touch fitting for ø4	
C6	One-touch fitting for ø6	SY5000
C8	One-touch fitting for ø8	315000
М	Mixed	

One-touch fitting (Inch size)

••		
N3	One-touch fitting for ø5/32"	
N7	One-touch fitting for ø1/4"	SY3000
M	Mixed	
N3	One-touch fitting for ø5/32"	
N7	One-touch fitting for ø1/4"	SY5000
N9	One-touch fitting for ø5/16"	313000
M	Mixed	

[·] For the mixed specification, indicate separately on a

Pilot specifications

Internal pilot					
S Internal pilot/built-in silencer					
R	External pilot				
RS External pilot/built-in silencer					

SUP/EXH block assembly mounting position

U	U side	2 to 10 stations					
D	D side	2 to 10 stations					
В	Both sides	2 to 16 stations					
М	Special specifications*						

^{*}For the special specifications, indicate separately on a manifold specification sheet.

SI unit part no.

Symbol	mbol SI unit specifications SI un	
_	NPN output (+COM.)	EX510-S001
N	PNP output (-COM.)	EX510-S101


solenoid valve, etc.

Base Mounted Manifold Series SY3000/5000



How to Order Valves



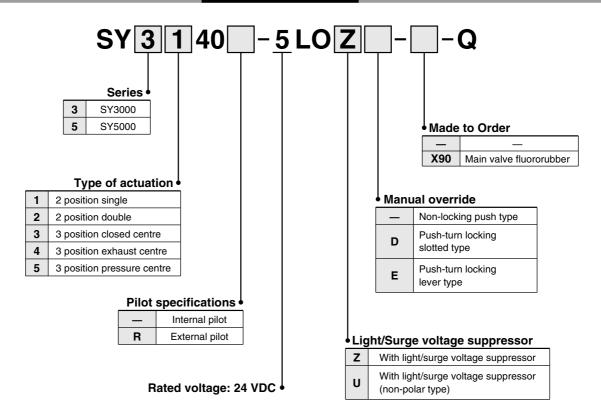


^{*} When ordering single unit of the base mounted type solenoid valve, the mounting screws and gaskets for the integrated manifold are supplied with the solenoid valve, but the stacking type gaskets are not included. When the stacking type gaskets are required, order them separately.





Type 45S6A Series SY3000/5000


Dimensions


SY3000: SS5Y3-45S6A D- Stations U-C4, N3

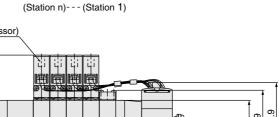

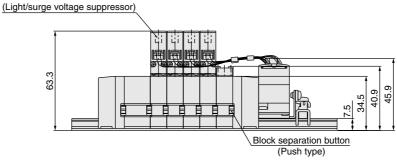



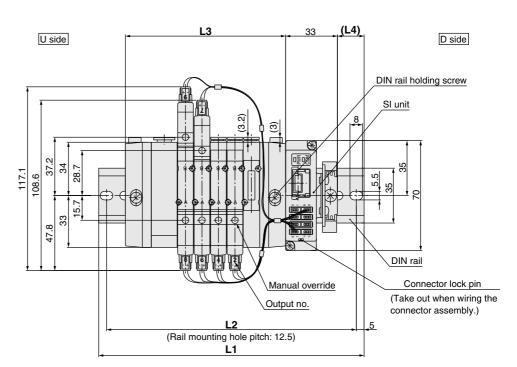

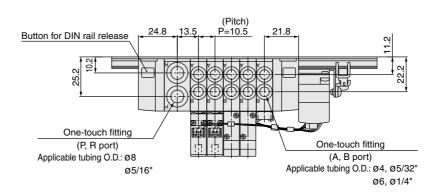


Stations n	2 stations	3	4	5	6	7	8	9	10 stations
L1	135.5	148	148	160.5	173	185.5	198	210.5	223
L2	125	137.5	137.5	150	162.5	175	187.5	200	212.5
L3	70.5	81	91.5	102	112.5	123	133.5	144	154.5
L4	16	17	12	13	14	15	16	17	18


Base Mounted Manifold Series SY3000/5000




SY3000: SS5Y3-45S6A U- Stations B-C4, N3




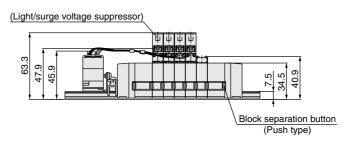





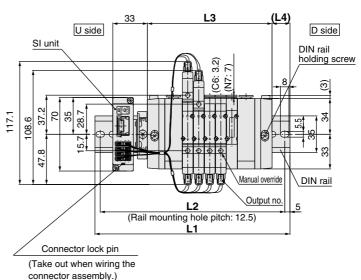

With interface regulator (with gauge)

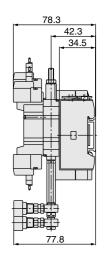

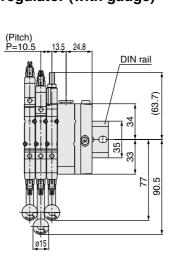

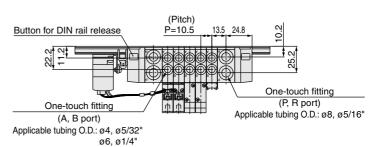



Stations n	2 stations	3	4	5	6	7	8	9	10	11	12	13	14	15	16 stations
L1	148	160.5	173	185.5	185.5	198	210.5	223	235.5	248	260.5	260.5	273	285.5	298
L2	137.5	150	162.5	175	175	187.5	200	212.5	225	237.5	250	250	262.5	275	287.5
L3	87	97.5	108	118.5	129	139.5	150	160.5	171	181.5	192	202.5	213	223.5	234
L4	14	15	16	17	12	13	14	15	16	17	18	12.5	13.5	14.5	15.5


Type 45S6A Series SY3000/5000


Dimensions

SY5000: SS5Y5-45S6A D-Stations U-C4, N3

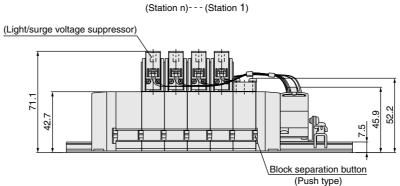

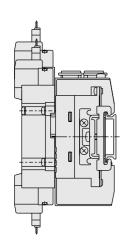

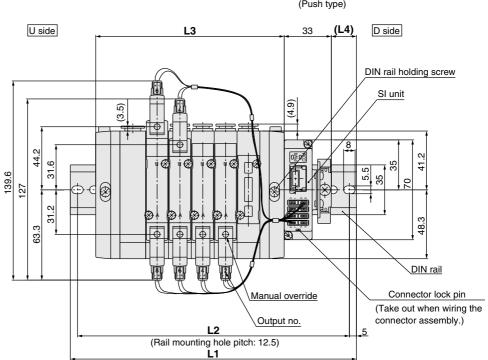

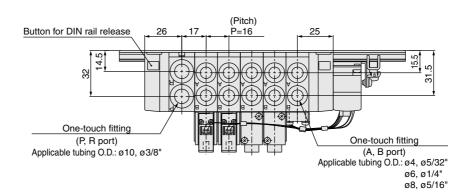


Stations n	2 stations	3	4	5	6	7	8	9	10 stations
L1	148	160.5	173	198	210.5	223	248	260.5	273
L2	137.5	150	162.5	187.5	200	212.5	237.5	250	262.5
L3	84	100	116	132	148	164	180	196	212
L4	15.5	14	12	16.5	15	13	17.5	16	14


Base Mounted Manifold SY3000/5000 Series 1/10-4556





SY5000: SS5Y5-45S6A U-Stations B-C6, N7 (S, N9


With interface regulator (with gauge)








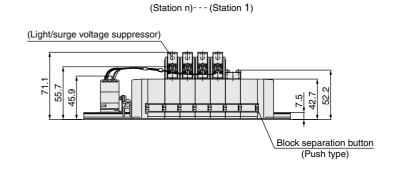

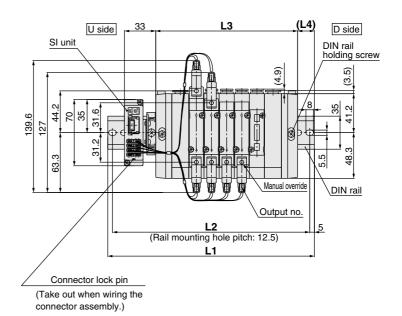

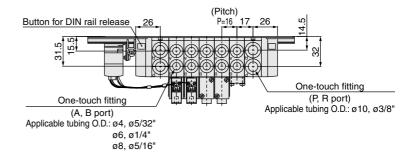

Stations n	2 stations	3	4	5	6	7	8	9	10	11	12	13	14	15	16 stations
L1	160.5	185.5	198	210.5	223	248	260.5	273	298	310.5	323	335.5	360.5	373	385.5
L2	150	175	187.5	200	212.5	237.5	250	262.5	287.5	300	312.5	325	350	362.5	375
L3	102	118	134	150	166	182	198	214	230	246	262	278	294	310	326
L4	13	17.5	15.5	14	12	16.5	15	13	17.5	16	14	12.5	17	15	13.5





Type 45\$6A Series SY3000/5000

Manifold Option

■ Connector assembly For single solenoid (SY3000-37-81A-□-N)

For double solenoid (SY3000-37-81A-□-□)






Connector assembly order no. (Can be used for the manifold without a specified layout (8 stations or less)) Integrated type

Model	Part no.	Connector mounting position
	SY3000-37-81A-3-N	Single : Starting from the SI unit side From unit 1 to unit 4
SS5Y3-45S6A	SY3000-37-81A-3-3	Double/3 position: Starting from the SI unit side From unit 1 to unit 4
33313-4330A	SY3000-37-81A-4-N	Single : Starting from the SI unit side From unit 5 to unit 8
	SY3000-37-81A-4-4	Double/3 position: Starting from the SI unit side From unit 5 to unit 8
	SY3000-37-81A-4-N	Single : Starting from the SI unit side From unit 1 to unit 4
SS5Y5-45S6A	SY3000-37-81A-4-4	Double/3 position: Starting from the SI unit side From unit 1 to unit 4
33313-4330A	SY3000-37-81A-6-N	Single : Starting from the SI unit side From unit 5 to unit 8
	SY3000-37-81A-6-6	Double/3 position: Starting from the SI unit side From unit 5 to unit 8
	SY3000-37-81A-4-N	Single : For 1 to 4 stations
SS5Y9- 23 SA	SY3000-37-81A-4-9	Double/3 position: For 1 to 4 stations
33319- 43 3A	SY3000-37-81A-6-N	Single : For 5 to 8 stations
	SY3000-37-81A-6-11	Double/3 position: For 5 to 8 stations

Note) The above is for the station addition or maintenance. When ordering a connector assembly separately, a number would not be printed on the connector.

■ Connector assembly SY3000-37-80A-□



■ Housing (8 pcs./set) SY3000-44-3A



Connector assembly order no. (Can be used for the manifold with a specified layout)

Model	Part no.	Connector mounting position					
SY3000-37-80A-3		Starting from the SI unit side: From unit 1 to unit 4					
SS5Y3-45S6A	SY3000-37-80A-4	Starting from the SI unit side: From unit 5 to unit 8					
SY3000-37-80A-6		Starting from the SI unit side: From unit 9 to unit 12					
	SY3000-37-80A-7	Starting from the SI unit side: From unit 13 to unit 16					
	SY3000-37-80A-4	Starting from the SI unit side: From unit 1 to unit 4					
SS5Y5-45S6A	SY3000-37-80A-6	Starting from the SI unit side: From unit 5 to unit 8					
33313-4330A	SY3000-37-80A-8	Starting from the SI unit side: From unit 9 to unit 12					
	SY3000-37-80A-10	Starting from the SI unit side: From unit 13 to unit 16					

Note 1) The above is for station addition or maintenance. When ordering a connector assembly separately, a number will not be printed on the connector. Note 2) After inserting the connector assembly into the housing, be sure to confirm that the lead wire will not come off by lightly pulling the wire.

Furthermore, do not reuse the lead wire after it has been inserted and removed.

Note 3) Wiring is set longer than the actual wiring distance.





verblockbar/DIN-Schienenmontage/individuelle Verdrahtung: Zubehör für Mehrfachanschlussplatte

Abdeckplatte



(Die Form variiert je nach Serie.)

Serie	Bestell-Nr.
SY3000	SX3000-75-1A(-Q)
SY5000	SX5000-76-5A(-Q)

* Gewindetyp

Nil	Rc
F	G
N	NPT
Т	NPTF

Achtung

Anzugsdrehmoment für Befestigungsschrauben

M2: 0.16 Nm M3: 0.8 Nm M4: 1.4 Nm










5 Port Solenoid Valve

How to Order Manifold

How to Order Valve Manifold Assembly (Example)

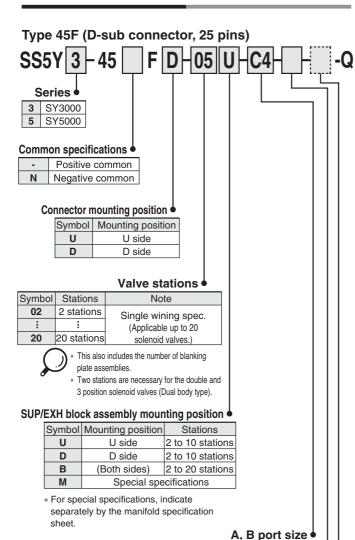

One-touch fitting (Metric size) Port size C4 One-touch fitting for ø4 C6 One-touch fitting for ø6 SY3000 Mixed M C4 One-touch fitting for ø4 C6 One-touch fitting for ø6 SY5000 C8 One-touch fitting for ø8 Mixed

One-touch fitting (Inch size) Port size N3 One-touch fitting for ø 5/32" N7 One-touch fitting for ø 1/4" SY3000 Mixed M N3 One-touch fitting for ø 5/32" N7 One-touch fitting for ø 1/4" SY5000 N9 One-touch fitting for ø 5/16" M Mixed


* In the case of mixed specifications (M), indicate separately on the manifold specification sheet Voltage **24 VDC**


12V 12 VDC

Option

When a longer DIN rail is desired than the specified stations, specify the station number to be required. (20 stations at maximum)

For external pilot specifications and built-in silencer, refer to page 208

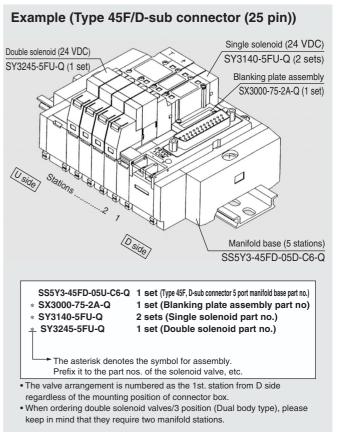

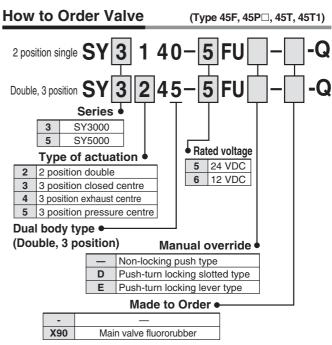


- * When ordering plug-in type solenoid valve as a single unit, gaskets are not included. Order them separately, if necessary.
- * With light/surge voltage suppressor (Non-polar type)



How to Order Manifold



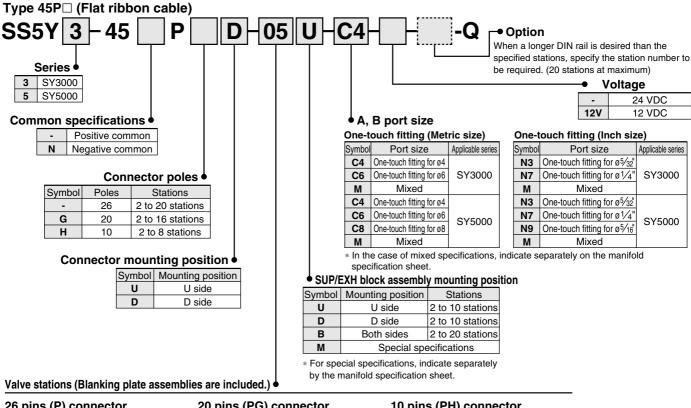

26 pins (P) connector

Symbol	Stations	Note	
02	2 stations	Single wiring spec.	
:	:	(Applicable up to 20 solenoid valves.)	
20	20 stations		

20 pins (PG) connector

Symbol	Stations	Note
02	2 stations	Single wiring spec.
:		(Applicable up to 16
16	16 stations	solenoid valves.)

10 pins (PH) connector

Symbol	Stations	Note	
02	2 stations	Single wiring spec.	
:		(Applicable up to 8	
08	8 stations	solenoid valves)	

Two stations are necessary for the double, 3 position (Dual body type).

Type 45T (9 pins terminal block)

SS5Y 3 -45T D - 105 Series • Option • **3** SY3000 When a longer DIN rail is desired **5** SY5000 than the specified stations, specify the station number to be required.

Symbol	Mounting position	
U	U side	
D	D side	

Valve stations

Symbol	Stations	Note	
02	2 stations	Single wiring spec. (Applicable up to 8 solenoid valve	
	:		
08	8 stations	(Applicable up to 0 soletiola valve	

This also includes the number of blanking plate assemblies

> * Two stations are necessary for the double, 3 position (Dual body type).

SUP/EXH block assembly mounting position •

Symbol	Mounting position	Stations
U	U side	2 to 8 stations
D	D side	2 to 8 stations
В	Both sides	2 to 8 stations
М	Special specifications	

* For special specifications, indicate separately by the manifold specification sheet.

One-touch fitting (Metric size) Port size C4 One-touch fitting for ø4

A, B port size


C6 One-touch fitting for Ø6 SY3000 М Mixed C4 One-touch fitting for ø4 C6 One-touch fitting for ø6 SY5000 One-touch fitting for ø8 C8 М Mixed

One-touch fitting (Inch size)

one teach intaing (men elec)			
Symbol	Port size	Applicable series	
N3	One-touch fitting for ø 5/32"		
N7	One-touch fitting for ø 1/4"	SY3000	
M	Mixed		
N3	One-touch fitting for ø 5/32"		
N7	One-touch fitting for ø 1/4"	SY5000	
N9	One-touch fitting for ø5/16"	ting for ø5/16" 3 1 3000	
M	Mixed		

* In the case of mixed specifications (M). indicate separately on the manifold

Type 45T1 (18 pins terminal block)



Terminal block mounting position •

Symbol	Mounting position	
U	U side	
D	D side	

Valve stations

Symbol	Stations	Note	
02	2 stations	Oin de minio e e e e	
:	:	Single wining spec. (Applicable up to 17 solenoid valves.)	
17	17 stations	(Applicable up to 17 solellolu valves.)	

This also includes the number of blanking plate assemblies. * Two stations are necessary for the

SUP/EXH block assembly mounting position •

double, 3 position (Dual body type).

Symbol	Mounting position	Stations	
U	U side	2 to 10 stations	
D	D side	2 to 10 stations	
В	Both sides	2 to 17 stations	
M	Special specifications		

* For special specifications, indicate separately by the manifold specification sheet.

A, B port size One-touch fitting (Metric size) Port size C4 One-touch fitting for ø4 C6 One-touch fitting for ø6 SY3000 М Mixed C4 One-touch fitting for ø4 C6 One-touch fitting for Ø6 SY5000

the station number to be required.

Mixed One-touch fitting (Inch size)

C8 One-touch fitting for ø8

М

Symbol	Port size	Applicable series	
N3	One-touch fitting for ø 5/32"		
N7	One-touch fitting for ø 1/4"	SY3000	
М	Mixed		
N3	One-touch fitting for ø 5/32"		
N7	One-touch fitting for ø 1/4"		
N9	One-touch fitting for ø5/16"	SY5000	
М	Mixed		


 In the case of mixed specifications (M). indicate separately on the manifold







SY3000/5000 Base Mounted Type 45

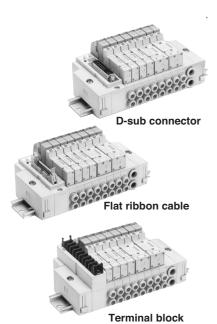

Manifold Specifications

Model			D-sub connector	Flat ribbon cable Type 45PI			Terminal block			
			Type 45F	Type 45P	Type 45PG	Type 45PH	Type 45T	Type 45T1		
Manifold		Plug-in								
P (SUP)/R (EXH)			Common SUP, Common EXH							
Valve static	ns Note 1, 2)		2 to 20 stations		2 to 16 stations	2 to 8 s	tations	2 to 17 stations		
A, B port		Location	Base							
Porting spe	cifications	Direction	Side							
	D. D. mart	SY3000	C8 (One-touch fitting for ø8)							
Port size	P, R port	SY5000	C10 (One-touch fitting for ø10)							
Port Size	A, B port	SY3000	C4 (One-touch fitting for ø4)/C6 (One-touch fitting for ø6)							
		SY5000	C4 (One-touch fitting for ø4)/C6 (One-touch fitting for ø6)/C8 (One-touch fitting for ø8)							
Applicable connector		Complies with MIL-C-24308	Socket: 26 pins MIL type with strain relief	Flat ribbon cable connector Socket: 20 pins MIL type with strain relief Conforming to MIL-C-83503	Socket: 10 pins MIL type with strain relief	Terminal block (M3) 9 pins	Terminal block (M3) 18 pins			
Internal wir	ing		+COM (Type 45□), -COM (Type 45N□) In common between +COM and -COM.							
Manifold ba	Manifold base weight W (g)		2 to 10 stations: W = 26n + 172							
weight W (g			11 to 20 stations: W = 26n + 199							
n: Stations (D-sub connector) SY5000		CVENON	2 to 10 stations: W = 54n + 227							
		11 to 20 stations: W = 52n + 264								

Note 1) For more than 11 stations, supply pressure to P port on both sides and exhaust from R port on both sides. Note 2) There is a limit depending on the number of solenoids. Refer to "How to Order".

Flow Rate Characteristics

	Port	size	Flow rate characteristics						
Model	1 ,5 ,3	4 ,2	1-	+4/2 (P→A/	B)	4/2→5/3 (A/B→EA/EB)			
	(P,EA,EB)	(A,B)	C (dm3/(s-bar))	b	Cv	C (dm3/(s·bar))	b	Cv	
SS5Y3-45□	C8	C6	0.88	0.21	0.22	0.95	0.18	0.22	
SS5Y5-45□	C10	C8	2.2	0.24	0.53	2.5	0.18	0.58	


Note) The value is for manifold base with 5 stations and individually operated 2 position type.



Manifold Option

■ D-sub connector (25 pins)/Cable assembly GVVZS3000-21A-2-s

 $\left(\text{ The D-sub connector cable ass'y can be ordered individually or included in a specific manifold model no. Refer to "How to Order Manifold".} \right)$




D-sub connector cable ass'y

	<u>.</u>
Cable length (L)	Ass'y No.
1m*	GVVZS3000-21A-1□—
3m	GVVZS3000-21A-2□-
5m	GVVZS3000-21A-3□-
8m	GVVZS3000-21A-4□-
20m	GVVZS3000-21A-5S

* Standard type is not available for the cable length of 1m.

Model
Shielded cable S
60 connector 60
Standard -



Electric characteristics


Item	Characteristics						
Conductor resistance /km, 20°C	57 or less						
Voltage limit V, 5min, AC	1500						
Insulation resistance M/km	20						

Wire color table by terminal number of D-sub connector cable assembly

Terminal No.	Lead wire colour	Dot marking
1	White	-
2	Brown	-
3	Green	_
4	Yellow	-
5	Grey	-
6	Pink	-
7	Blue	_
8	Red	-
9	Black	_
10	Violet	-
11	Grey	Pink
12	Red	Blue
13	White	Green
14	Brown	Green
15	White	Yelow
16	Yelow	Brown
17	White	Grey
18	Grey	Brown
19	White	Pink
20	Pink	Brown
21	White	Blue
22	Brown	Blue
23	White	Red
24	Brown	Red
25	White	Black

^{*} Connector made in conformity with DIN47100.

■ Flat Ribbon Cable Connector/Cable assembly AXT100-FC $^{10}_{26}$ - $^{1}_{3}$

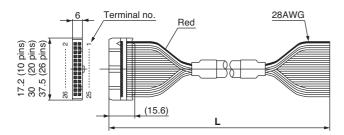

Flat ribbon cable connector

Cable	Assembly part no.						
length (L)	26 pins	20 pins	10 pins				
1.5 m	AXT100-FC26-1	AXT100-FC20-1	AXT100-FC10-1				
3 m	AXT100-FC26-2	AXT100-FC20-2	AXT100-FC10-2				
5 m	AXT100-FC26-3	AXT100-FC20-3	AXT100-FC10-3				

- * When using a standard commercial connector, use a 26-pin, 20-pin, or 10-pin type connector conforming to MIL-C-83503 with strain relief.
- * Cannot be used for movable wiring
- * Lengths other than the above are also available. Please contact SMC for details.

Connector Manufacturers' Example


- $\bullet\,\mathsf{HIROSE}\,\,\mathsf{ELECTRIC}\,\,\mathsf{CO.},\,\mathsf{LTD}.$
- 3M Japan Limited
- Fujitsu Limited
- · Japan Aviation Electronics Industry, Limited
- J.S.T. Mfg. Co., Ltd.
- Oki Electric Cable Co., Ltd.

■ Dimensions/DIN rail

VZ1000 − 11 − 1 − 🗌

Refer to L dimensions

 \ast Fill in \square with an appropriate no. listed on the table of



No.	0	1	2	3	4	5	6	7	8	9	10
L Dimension	98	110.5	123	135.5	148	160.5	173	185.5	198	210.5	223
No.	11	12	13	14	15	16	17	18	19	20	21
L Dimension	235.5	248	260.5	273	285.5	298	310.5	323	335.5	348	360.5
No.	22	23	24	25	26	27	28	29	30	31	32
L Dimension	373	385.5	398	410.5	423	435.5	448	460.5	473	485.5	498
No.	33	34	35	36	37	38	39	40	41	42	43
L Dimension	510.5	523	535.5	548	560.5	573	585.5	598	610.5	623	635.5
No.	44	45	46	47	48	49	50	51	52	53	54
L Dimension	648	660.5	673	685.5	698	710.5	723	735.5	748	760.5	773
No.	55	56	57	58	59	60	61	62	63	64	65
L Dimension	785.5	798	810.5	823	835.5	848	860.5	873	885.5	898	910.5
No.	66	67	68	69	70	71					
L Dimension	923	935.5	948	960.5	973	985.5					





Refer to L1 dimension on pages starting with page 145 for lengths that correspond to the number of manifold stations.

Manifold Internal Wiring

45(N)F/D-sub Connector

A D-sub connector used for electric wiring reduces labor during wiring operation. Connectors conforming to MIL are used for interchangeability.

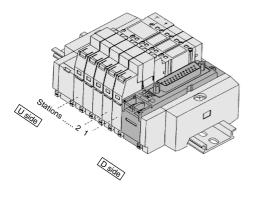

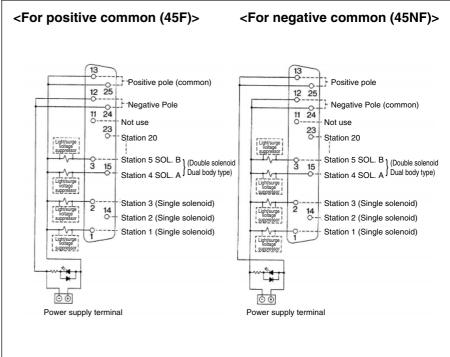



- The power source terminal is used for connecting to an external power source.
- The maximum number of stations that can be accommodated is 20 manifold stations, with up to 20 solenoids.(For more stations, please contact SMC.)
- Regardless of the connector mounting position, stations are to be counted from D side as the 1st one.


Type 45(N)P/Flat Ribbon Cable (26 pins)

A flat cable connector used for electric wiring reduces labor during wiring operation.

Connectors conforming to MIL are used for interchangeability.





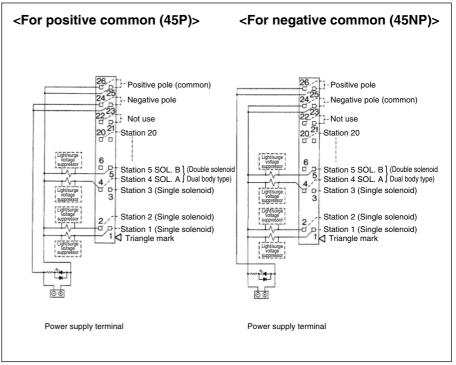

- The power source terminal is used for connecting to an external power source.
- The maximum number of stations that can be accommodated is 20 manifold stations, with up to 20 solenoids. (For more stations, please contact SMC.)
- Regardless of the connector mounting position, stations are to be counted from D side as the 1st one.





Manifold Internal Wiring


Type 45(N)PG/Flat Ribbon Cable (20 pins)

A flat cable connector used for electric wiring reduces labor during wiring operation.

Connectors conforming to MIL are used for interchangeability.






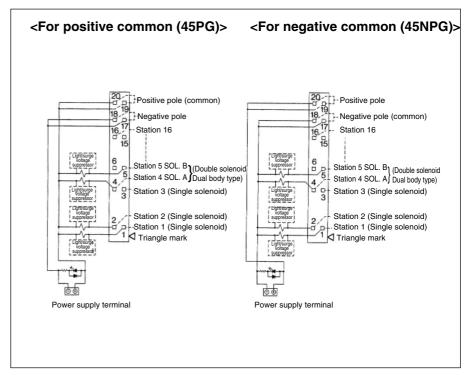



- The power source terminal is used for connecting to an external power source.
- The maximum number of stations that can be accommodated is 16 manifold stations, with up to 16 solenoids. (For more stations, please contact SMC.)
- Regardless of the connector mounting position, stations are to be counted from D side as the 1st one.

Type 45(N)PH/Flat Ribbon Cable (10 pins)

A flat cable connector used for electric wiring reduces labor during wiring operation. Connectors conforming to MIL are used for interchangeability.

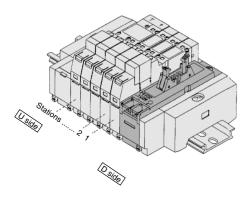



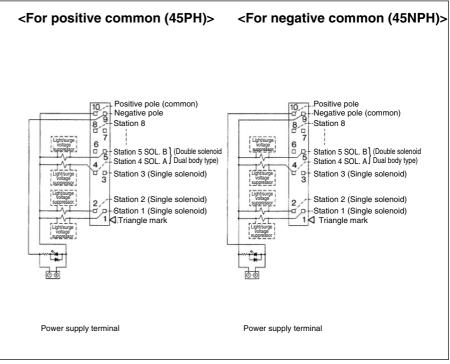


- The power source terminal is used for connecting to an external power source.
- The maximum number of stations that can be accommodated is 8 manifold stations, with up to 8 solenoids. (For more stations, please contact SMC.)
- Regardless of the connector mounting position, stations are to be counted from D side as the 1st one.




Manifold Internal Wiring

Type 45T/Terminal Block


A terminal block style permits direct cable connection without treatment of lead wires.

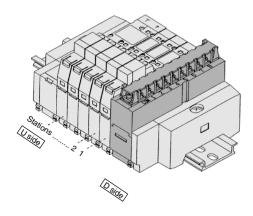


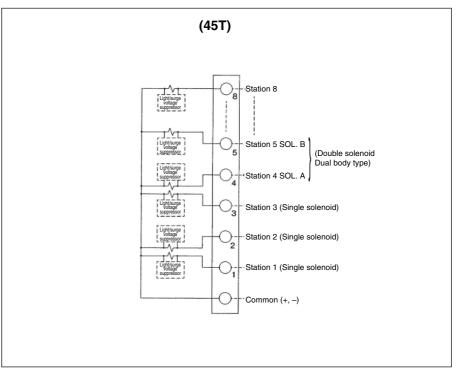

- The maximum number of stations that can be accommodated is 8 manifold stations, with up to 8 solenoids. (For more stations, please contact SMC.)
- Regardless of the connector mounting position, stations are to be counted from D side as the 1st one.
- There is no polarity in the COM wiring. Supply positive power for +COM spec. and negative power for -COM spec.

Type 45T1/Terminal Block

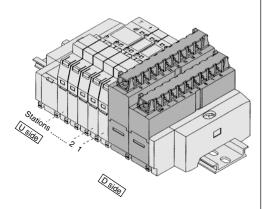

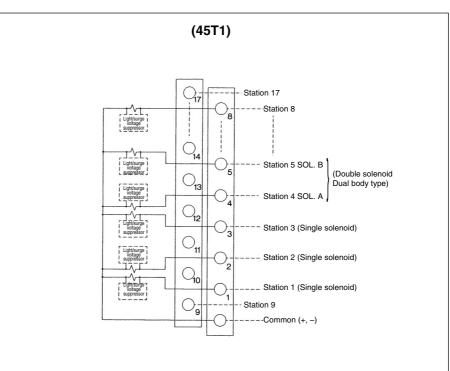

- The maximum number of stations that can be accommodated is 17 manifold stations, with up to 17 solenoids.
 (For more stations, please contact SMC.)
- Regardless of the connector mounting position, stations are to be counted from D side as the 1st one.
- There is no polarity in the COM wiring. Supply positive power for +COM spec. and negative power for -COM spec.









How to Connect SS5Y□-45□ (Plug-in)

Power terminal is equipped with plug-in manifold of Series SY as standard. Power terminal enables the power supply to valve from either of manifold or controller side.

1. Wiring example when using manifold power supply terminals

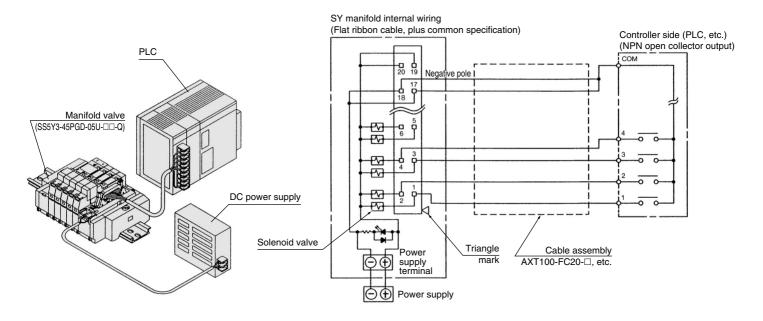

2. Wiring example when not using manifold power supply terminals (Power is supplied to the controller side or along the wiring, etc.)

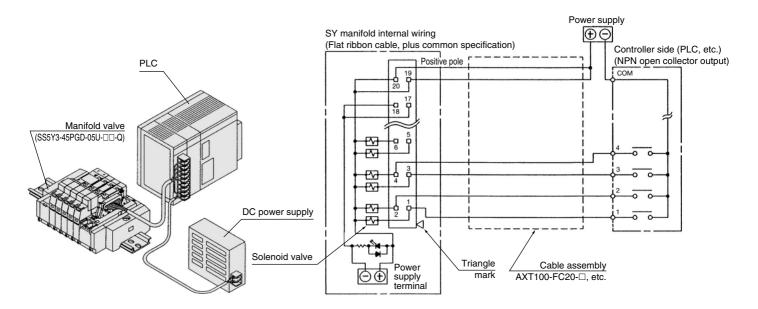


⚠ Caution


Single wire, COM position, etc. of PLC are different from each manufacturer. When
connecting with PLC, read the specifications carefully and understand the electrical
circuit. Poor wiring could cause damage to PLC, power source, etc. as well as manifold
and valve.

Type 45 Base Mounted


SY3000: D-sub Connector/Plug-in

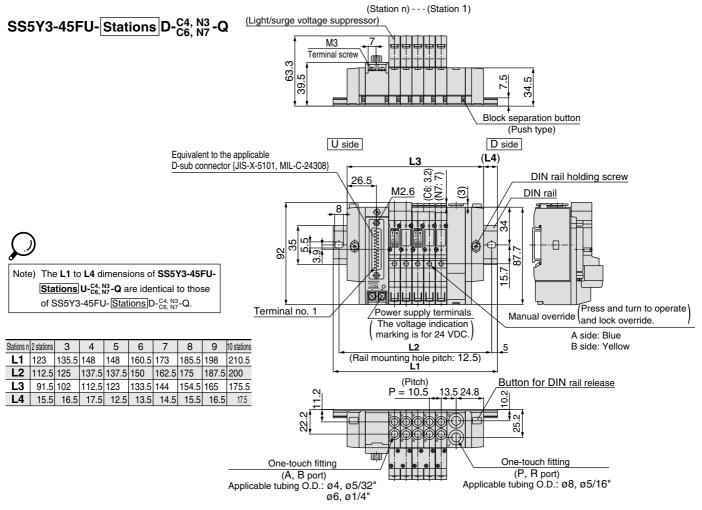


SS5Y3-45FU-Stations B-C4, N3-Q

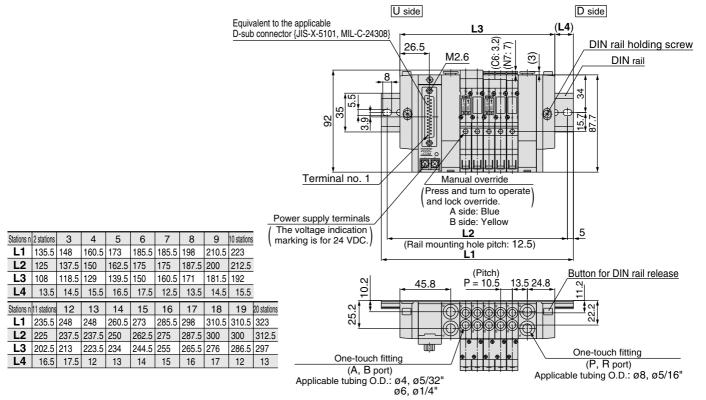

SY3000: D-sub Connector/Plug-in

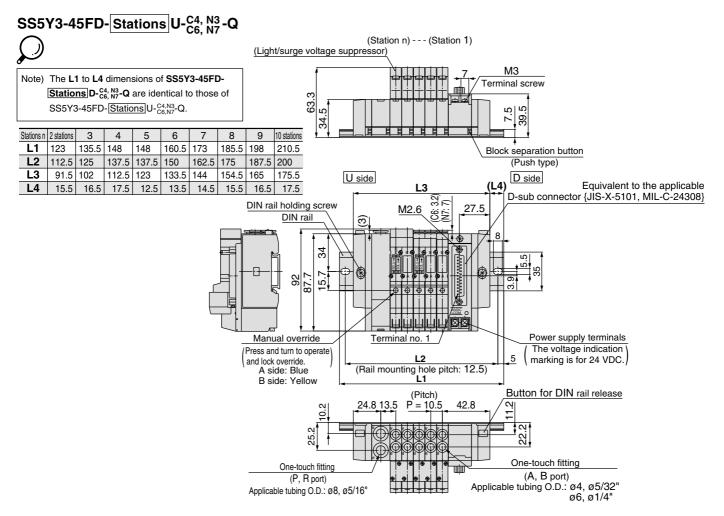


SS5Y3-45FD-Stations B-C4,N3 -Q

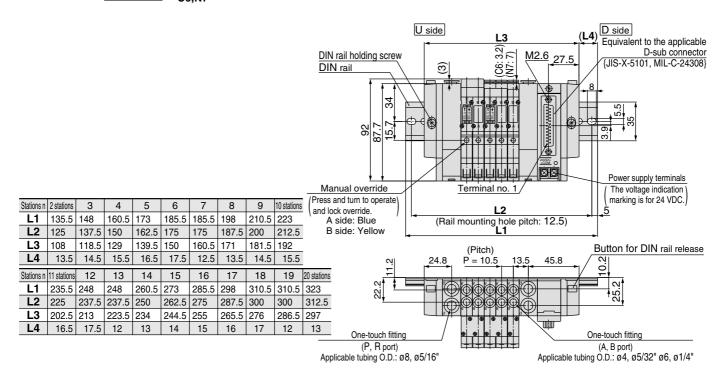




SY5000: D-sub Connector/Plug-in

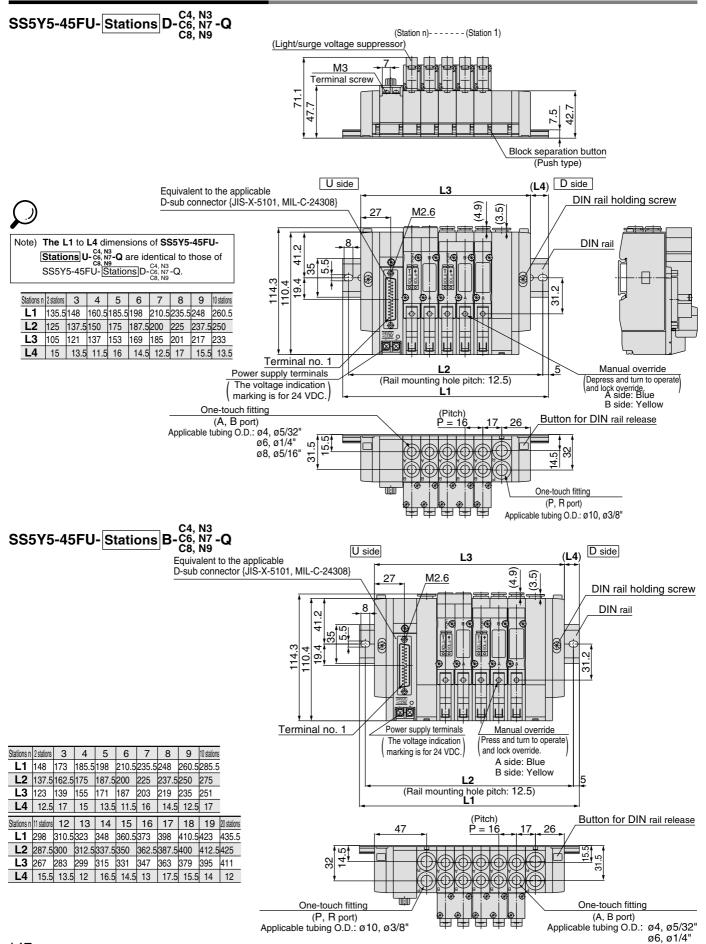


ø8, ø5/16"

SY5000: D-sub Connector/Plug-in

SS5Y5-45FD-Stations U-C4, N3-QC8, N9-Q

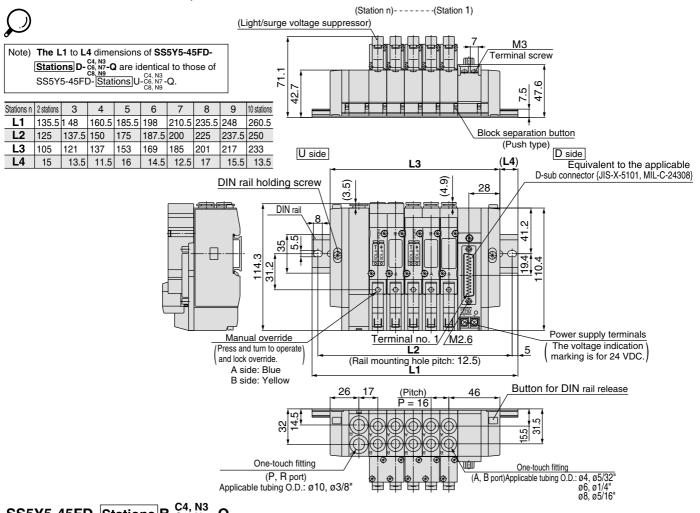


SS5Y5-45FD-Stations B-C4, N3 -Q C8, N9

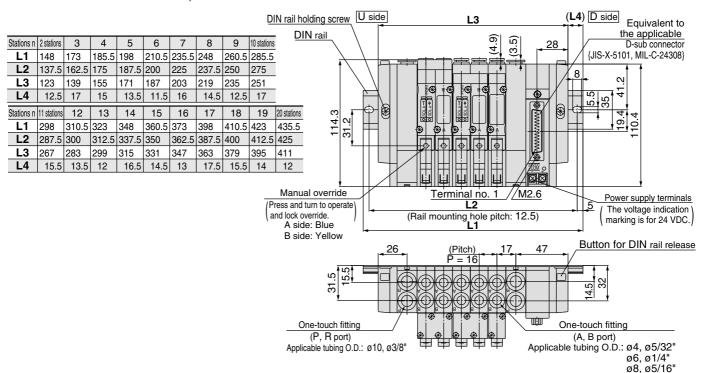




SY3000: Flat Ribbon Cable/Plug-in

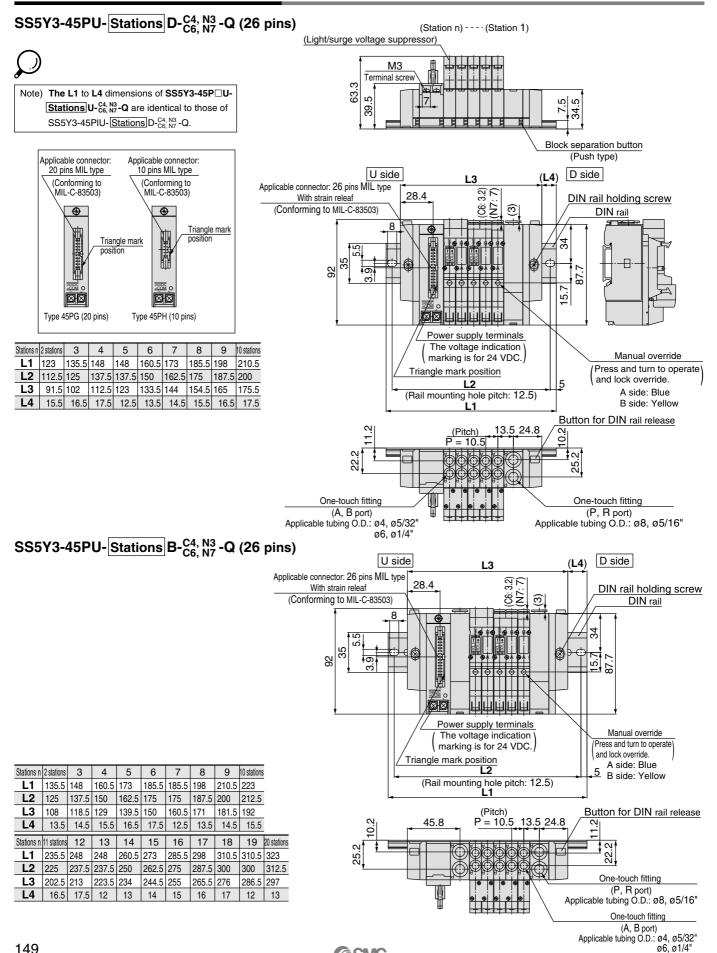


SY3000: Flat Ribbon Cable/Plug-in

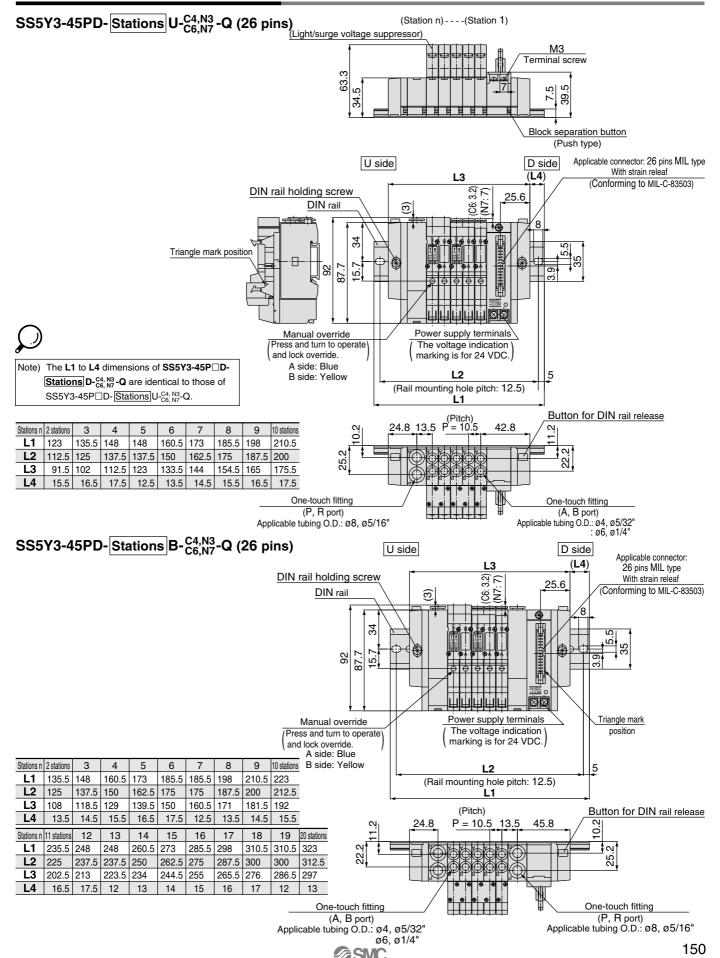


Base Mounted

SY5000: Flat Ribbon Cable/Plug-in

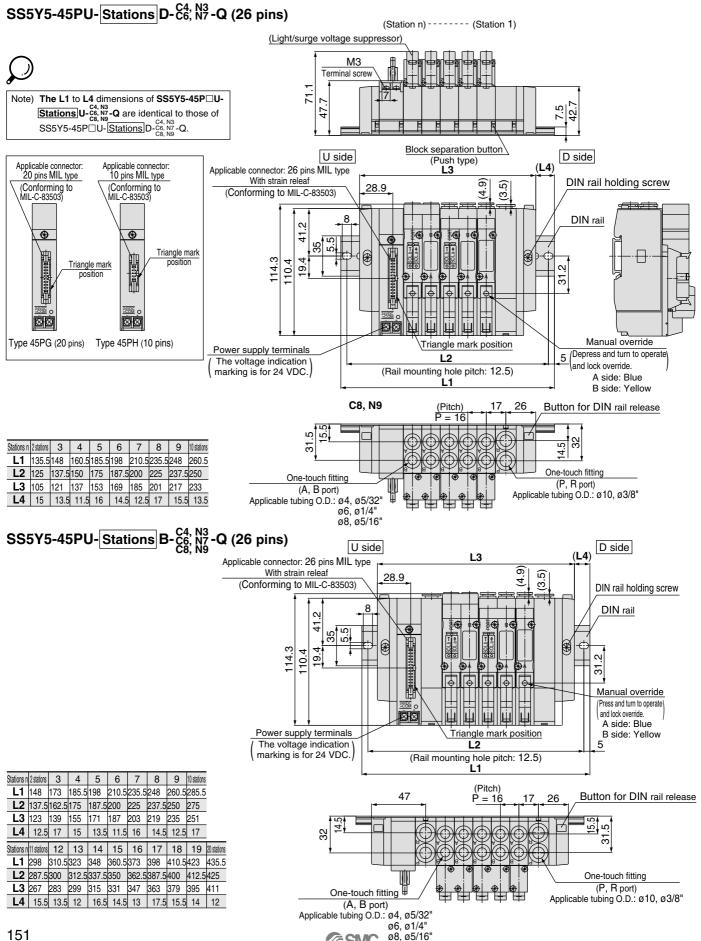

SY5000: Flat Ribbon Cable/Plug-in

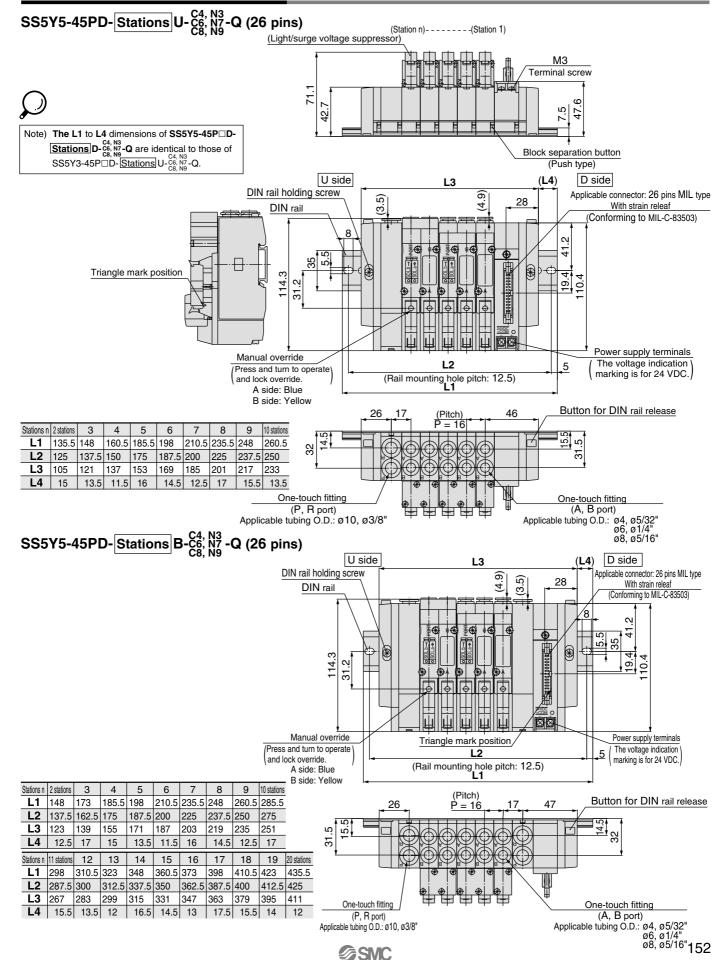



SY3000: 9 Pins Terminal Block/Plug-in

SS5Y3-45TU- $\underline{\text{Stations}}$ D- $^{\text{C4}, N3}_{\text{C6}, N7}$ -Q (9 pins)



Note) The **L1** to **L4** dimensions of **SS5Y3-45TU-**[Stations]U-C4, N3, Q, SS5Y3-45TD-[Stations]U-C6, N7-Q

, **SS5Y3-45TD-**[Stations]D-C4, N3-Q are identical those of SS5Y3-45TU-[Stations]D-C6, N7-Q.


Stations n	2 stations	3	4	5	6	7	8 stations
L1	123	135.5	148	148	160.5	173	185.5
L2	112.5	125	137.5	137.5	150	162.5	175
L3	91.5	102	112.5	123	133.5	144	154.5
L4	15.5	16.5	17.5	12.5	13.5	14.5	15.5


SS5Y3-45TU-Stations B-C4, N3-Q (9 pins)



Note) The **L1** to **L4** dimensions of **SS5Y3-45TD-**<u>Stations</u> **B-**^{C4}, N³-**Q** are identical to those of SS5Y3-45TU-[<u>Stations</u>] B-^{C6}, N³-Q.

Stations n	2 stations	3	4	5	6	7	8 stations
L1	135.5	148	160.5	173	185.5	185.5	198
L2	125	137.5	150	162.5	175	175	187.5
L3	108	118.5	129	139.5	150	160.5	171
L4	13.5	14.5	15.5	16.5	17.5	12.5	13.5

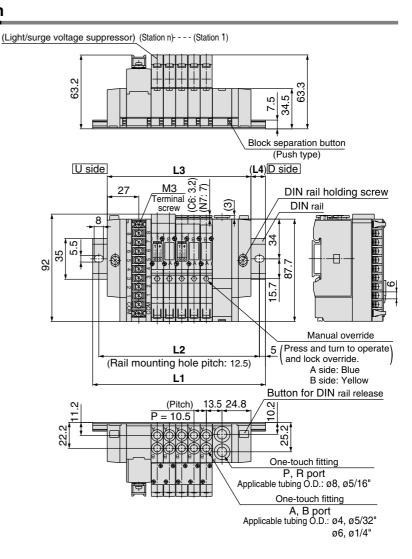

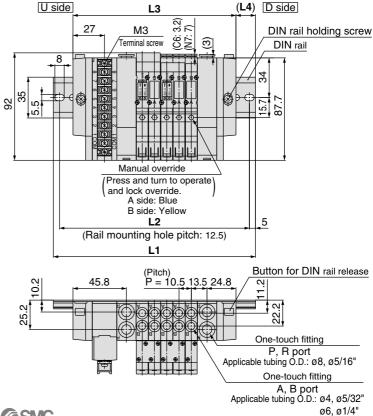

(Station n) ----- (Station 1) (Light/surge voltage suppressor)

SY5000: 9 Pins Terminal Block/Plug-in








Note) The L1 to L4 dimensions of SS5Y5-45TU
| Stations|U-C4, N3-C4, SS5Y5-45TD-|Stations|U-C6, N7-C4, N3-C4, N3-

Stations n	2 stations	3	4	5	6	7	8 stations
L1	135.5	148	160.5	185.5	198	210.5	235.5
L2	125	137.5	150	175	187.5	200	225
L3	105	121	137	153	169	185	201
14	15	13.5	11.5	16	1/15	12.5	17

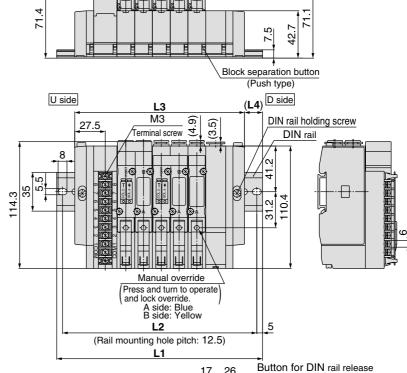

One-touch fitting

(A, B port)
Applicable tubing O.D.: ø4, ø5/32"


ø6, ø1/4"

ø8, ø5/16"

Applicable tubing O.D.: ø4, ø5/32"

SS5Y5-45TU-Stations B-C4, N3 -Q (9 pins)

(L4) D side U side L3 М3 6.4 DIN rail holding screw 27.5 Terminal screw DIN rail 110.4 Q 3 Manual override Press and turn to operate and lock override.
A side: Blue
B side: Yellow L2 5 (Rail mounting hole pitch: 12.5) Button for DIN rail release

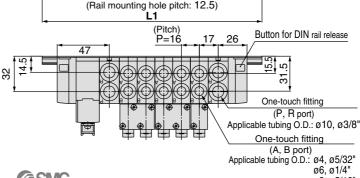



Note) The L1 to L4 dimensions of SS5Y5-45TD
Stations B-C6, N7-Q are identical to those C8, N9

of SS5Y5-45TU
Stations B-C6, N7-Q.


Stations n	2 stations	3	4	5	6	7	8 stations
L1	148	173	185.5	198	210.5	235.5	248
L2	137.5	162.5	175	187.5	200	225	237.5
L3	123	139	155	171	187	203	219
L4	12.5	17	15	13.5	11.5	16	14.5

ø8, ø5/16"

Type 45 Base Mounted


SY3000: 18 Pins Terminal Block/Plug-in



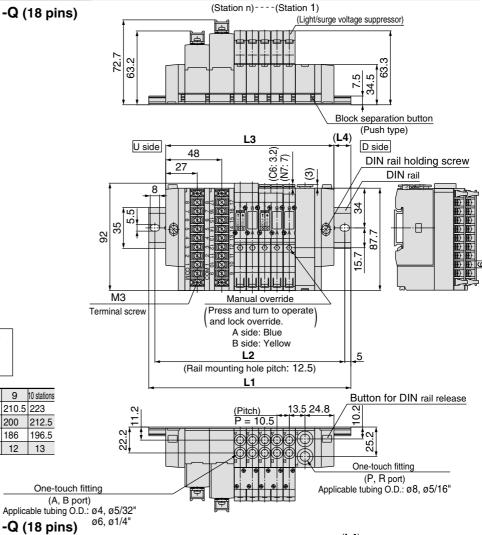

Stations n	2 stations	3	4	5	6	7	8	9	10 stations
L1	148	148	160.5	173	185.5	198	210.5	210.5	223
L2	137.5	137.5	150	162.5	175	187.5	200	200	212.5
L3	112.5	123	133.5	144	154.5	165	175.5	186	196.5
L4	17.5	12.5	13.5	14.5	15.5	16.5	17.5	12	13

SS5Y3-45T1U-Stations B-C4, N3-Q (18 pins)

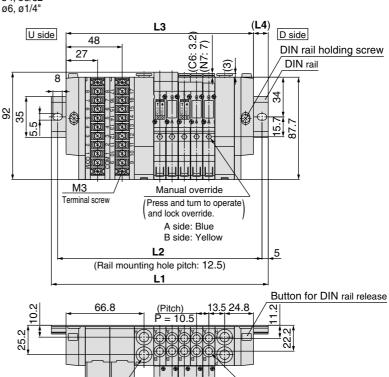


One-touch fitting
(A, B port)
Applicable tubing O.D.: Ø4, Ø5/32"

ø6, ø1/4"

Stations n	2 stations	3	4	5	6	7	8	9 stations
L1	160.5	173	185.5	185.5	198	210.5	223	235.5
L2	150	162.5	175	175	187.5	200	212.5	225
L3	129	139.5	150	160.5	171	181.5	192	202.5
L4	15.5	16.5	17.5	12.5	13.5	14.5	15.5	16.5
Stations n	10 stations	11	12	13	14	15	16	17 stations
L1	248	248	260.5	273	285.5	298	310.5	310.5
L2	237.5	237.5	250	262.5	275	287.5	300	300
L3	213	223.5	234	244.5	255	265.5	276	286.5
L4	17.5	12	13	14	15	16	17	12


SY3000: 9 Pins Terminal Block/Plug-in

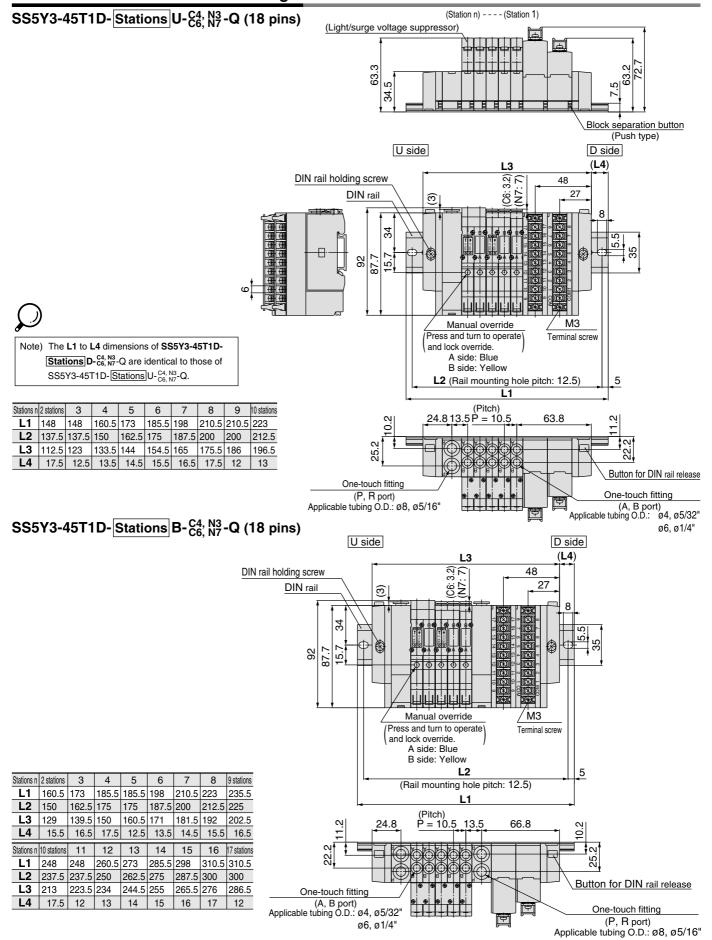


SMC

Base Mounted

SY5000: 18 Pins Terminal Block/Plug-in

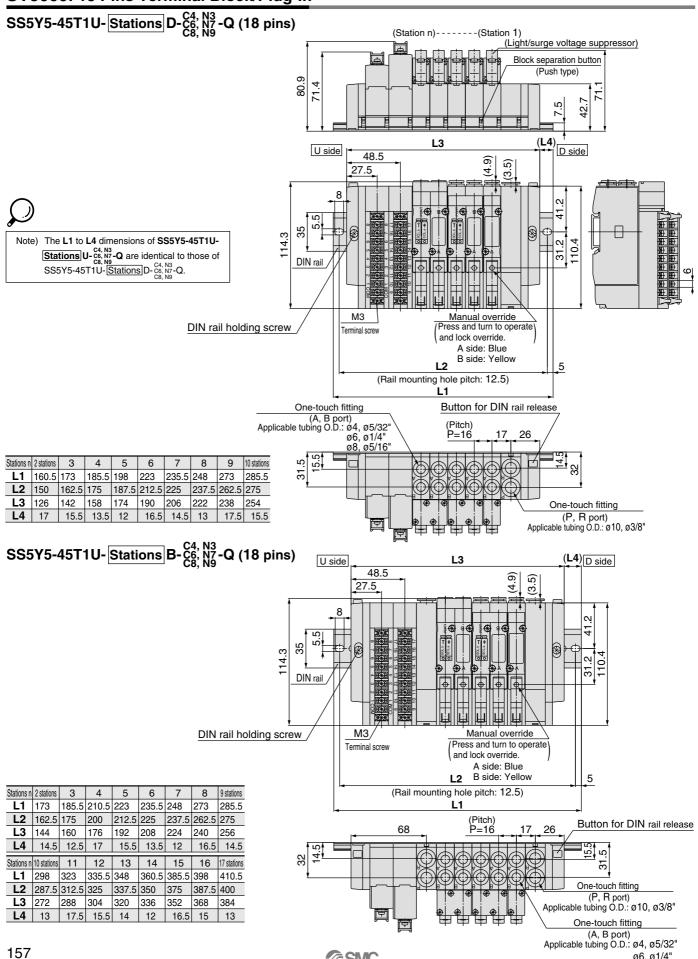

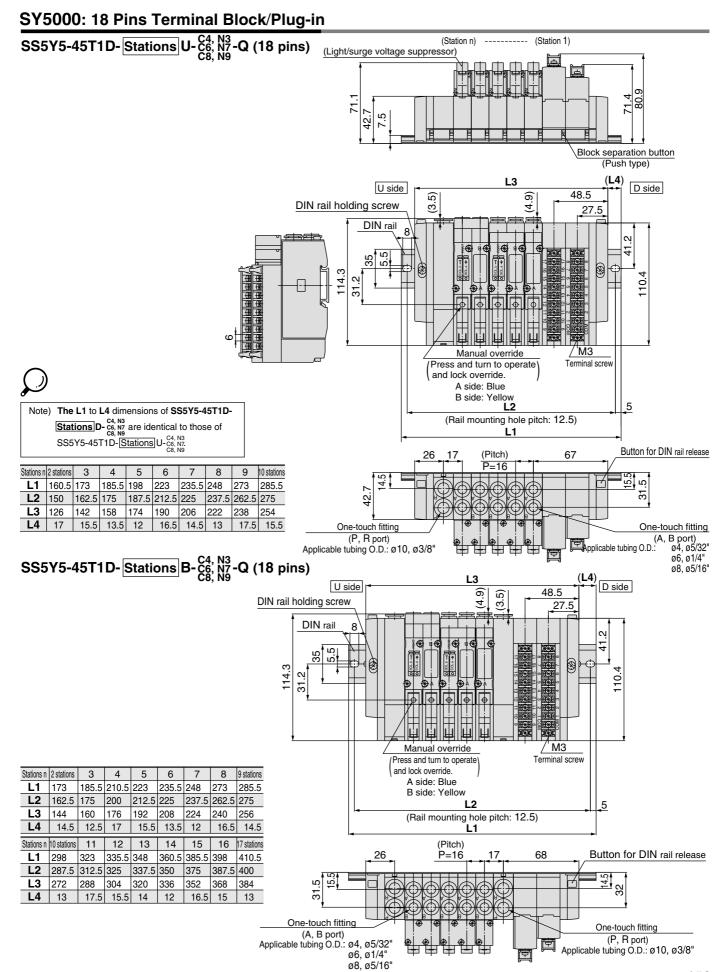


多SMC



DIN Rail Manifold Exploded View

Type 45F (D-sub Connector) Manifold

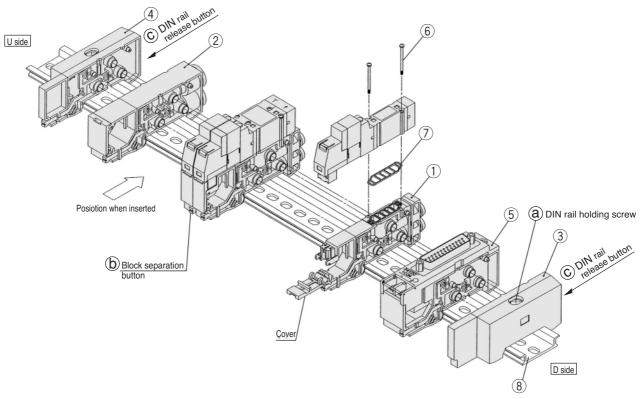

		NI.				
No.	Description	SY3000	SY5000	Note		
1	Manifold block assembly			rs according to an attached lead wire assembly based on the connector spec. Select an nanifold block assembly part number shown below. (Gasket 7 is supplied as an accessory.)		
2	SUP/EXH block assembly	(Metric size) SX3000-51-2A (Inch size) SX3000-51-16A	(Metric size) SX5000-51-2A (Inch size) SX5000-51-16A	Metric size Inch size SY3000: P, R port with one-touch fitting for $\emptyset 8$ With one-touch fitting for $\emptyset 5/16$ SY5000: P, R port with one-touch fitting for $\emptyset 10$ With one-touch fitting for $\emptyset 3/8$ "		
3	End block assembly	SX3000-52-2A-Q	SX5000-52-2A-Q	For D) side	
4	End block assembly	SX3000-53-2A-Q	SX5000-53-2A-Q	For U side		
5-1	Connector block assembly (for D-sub connector)	SX3000-64-1A	SX5000-64-1A	-1A: +COM -1NA: -COM		
5-2	Connector block assembly (for 26 pins flat cable)	SX3000-64- ^{2A} _{2NA} -26	SX5000-64-2A 2NA-26		Note)	
5-3	Connector block assembly (for 20 pins flat cable)	SX3000-64- ^{2A} _{2NA} -20	SX5000-64-2A 2NA-20	-2A: +COM -2NA: -COM	For 24 VDC	
5-4	Connector block assembly (for 10 pins flat cable)	SX3000-64- ^{2A} _{2NA} -10	SX5000-64- _{2NA} -10			
5-5	Connector block assembly (for 2 to 8 stations (T, T1) terminal block)	SX3000-64-3A	SX5000-64-3A	In common between	a COM and COM	
5-6	Connector block assembly (for 9 to 17 stations (T1) terminal block)	SX3000-64-8A	SX5000-64-8A	In common between +COM and -COM.		
6	Round head combination screw	SY3000-23-4	M3 x 26, Matt nickel plated			
7	Gasket	SX3000-57-4	SX5000-57-6			
8	DIN rail	VZ1000)-11-1-l□	Refer to p	page 118.	

Note 1) The numbers 5-1 to 4 are for 24 VDC. For 12 VDC, suffix "-12V" to the end of parts number. (Example) SX3000-64-1A-12 V Note 2) Two manifold block assemblies are necessary for the double, 3 position (Dual body type).

	·	
Type of manifold	Manifold block assembly part no.	Note
For 45(N)F (D-sub connector)	SX ₅ ³ 000-50-3A-□□(-Q)	□□: AB port SY3000 (metric size) C4: With One-touch fitting for ø4 C6: With One-touch fitting for ø6 (inch size) N3: With One-touch fitting for ø5/₃₀"
For 45(N) ^P _{PH} (Flat ribbon cable)	SX ₅ ³ 000-50-5A-□□(-Q)	N7: With One-touch fitting for ø1⁄4" A, B port SY5000 (metric size) C4: With One-touch fitting for ø4 C6: With One-touch fitting for ø6
For 45_{11}^{T} (Terminal block)	SX ₅ ³ 000-50-7A-□□(-Q)	C8: With One-touch fitting for ø8 (inch size) N3: With One-touch fitting for ø5/32" N7: With One-touch fitting for ø1/4" N9: With One-touch fitting for ø5/16"

Note) The lead wire assembly is supplied with the manifold block assembly.



How to Increase Manifold Bases

Loosen DIN rail holding screw (a) fixing the manifold base until it begins to turn idly. (While pressing DIN rail releasing buttons ©), at two locations, separate the manifold base from the DIN rail.)

Additional bases are to be added to the U side. Press splitting button (b) of the manifold block assembly on the U side until button (b) locks, and then separate the block assemblies.

3 Separate the connector block assembly in the same manner as 2, and remove the connector mounting screw shown in Fig. 1.

Loosen the valve mounting screw on the U side, remove the valve, and take out the receptacle housing. (Refer to Fig. 2.)

Insert the common wire (red) of the manifold block assembly to be added into the pin insertion section (N mark) of the receptacle housing that was taken out in 4, mount it on the manifold block, and mount the removed valve.

6 As shown in Fig. 3, mount the additional manifold block assembly on the DIN rail on the U side. Refer to the circuit diagram, and insert the lead wire (black) as shown in Fig. 4.

Press the blocks against each other until a click sound is produced, place the lead wire in the manifold block, and close the lid without pinching the lead wire.

8 While lightly holding the blocks together so that there are no gaps between them, secure them to the DIN rail by tightening the DIN rail holding screws (a). △ (Tightening torque: 1.4 N·m)

- ⚠ Caution 1. Depending on the connector, there is a limit to the number of solenoids that can be used. Manifold bases that can be added cannot exceed the number of usable solenoids
 - 2. The manifold block assembly mounting position for additional manifold bases is always on the U side, because wires are connected to respective connectors sequentially from the D side.
 - 3. When DIN rail holding screw (a) for the end block is not sufficiently tightened during reassembly, air leakage may result. Before supplying air, check that there is no gap between blocks and that the manifold block is firmly fixed to the DIN rail in order to ensure air supply without leakage.



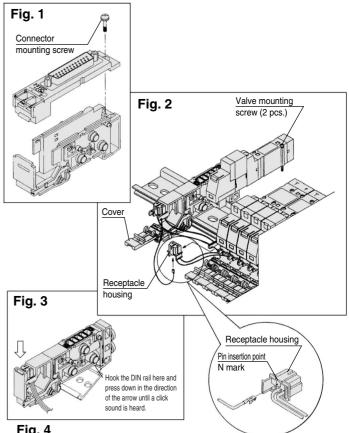


Fig. 4

D-sub connector (45F)





Note) After inserting pins, lightly pull lead wiresto check that pins are locked.

Note) Insert pins after removing the connectorfrom the main unit. After inserting pins, lightly pull lead wires to check that the pins are locked.

Note) Insert tab terminals completely.

Fitting Assembly

Type 45 manifold permits change in the A and B port sizes by changing the manifold block fitting assembly.

After removing the valve, remove the clip with a screwdriver, etc. For mounting a new fitting assembly, insert it and then insert a clip until it will not come out of the manifold block.

Fitting Assembly Part No.


Metric size

SY3000	One-touch fitting for ø4	VVQ1000-50A-C4
SY3000	One-touch fitting for ø6	VVQ1000-50A-C6
	One-touch fitting for ø4	
SY5000	One-touch fitting for ø6	VVQ1000-51A-C6
	One-touch fitting for ø8	VVQ1000-51A-C8

Inch size

CV2000	One-touch fitting for ø5/32"	VVQ1000-50A-N3
513000	One-touch fitting for ø $\frac{5}{32}$ " One-touch fitting for ø $\frac{1}{4}$ "	VVQ1000-50A-N7
	One-touch fitting for ø5/32"	VVQ1000-51A-N3
SY5000	One-touch fitting for ø 1/4"	VVQ1000-51A-N7
	One-touch fitting for ø5/16"	VVQ1000-51A-N9

Note 1) P and R ports cannot be changed. Note 2) Use caution that O-rings must be free from scratches and dust. Otherwise, air leakage may result.

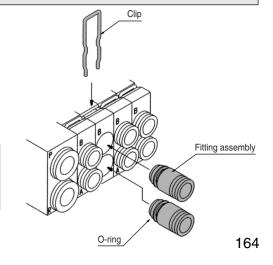



5 Port Solenoid Valve Series SY3000/5000 **Base Mounted**



Stacking Type/DIN Rail Mounted

How to Order Manifold

05 U C6 - Q Series • **3** SY3000 **5** SY5000 SI unit specifications Protocol type 0 Without SI unit Q DeviceNet® CC-LINK ZB CompoNet® (Positive common) ZBN CompoNet® (Negative common) * Even though when it is not equipped with SI unit, DIN rail length is long enough for future expectancy of mounting SI unit. Valve stations Symbol Stations Note 02 2 stations Single wining spec (Applicable up to 16 solenoid valves.) 16 16 stations

- * Two stations are necessary for the double and 3 position
- * This also includes the number of blanking plate assemblies. solenoid valves (Dual body type).

SUP/EXH block assembly mounting position •

		J		
Symbol Mounting position		Stations		
U	U side	2 to 10 stations		
D	D side	2 to 10 stations		
В	(Both sides)	2 to 16 stations		
M	Special spec	ifications		

* For special specifications, indicate separately by the manifold specification

A, B port size

One-touch fitting (Metric size)

Symbol	Port size	Applicable series
C4	One-touch fitting for ø4	
C6	One-touch fitting for ø6	SY3000
M	Mixed	
C4	One-touch fitting for ø4	
C6	One-touch fitting for ø6	SY5000
C8	One-touch fitting for ø8	313000
М	Mixed]

One-touch fitting (Inch size)

Symbol	Port size	Applicable series
N3	One-touch fitting for ø5/32"	
N7	One-touch fitting for ø1/4"	SY3000
M	Mixed	
N3	One-touch fitting for ø5/32"	
N7	One-touch fitting for ø1/4"	SY5000
N9	One-touch fitting for ø5/16"	
M	Mixed	

* In the case of mixed specifications, indicate separately on the manifold specification sheet.


Option 9

When a longer DIN rail is desired than the specified stations, specify the station number to be required. (Max. 16 stations)


CLUDIT Dort No

31 01	III Pari No.	
Symbol	Protocol type	SI unit No.
Q	DeviceNet®	EX122-SDN1
٧	CC-LINK	EX122-SMJ1
ZB	CompoNet® (Positive common)	EX122-SCM1
7RN	CompoNet® (Negative common)	FX122-SCM3

How to Order Valve Manifold Assembly (Example)

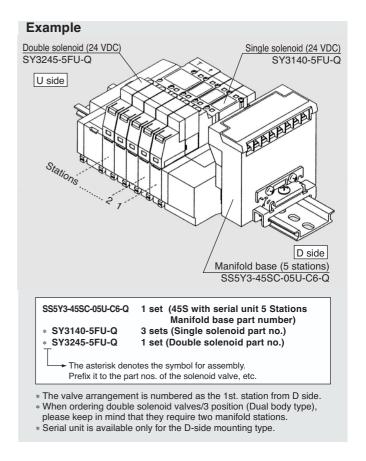

How to Order Valve

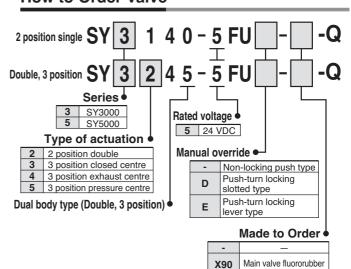

- * When ordering plug-in type solenoid valve as a single unit, gaskets are not included. Order them separately, if necessary,
- * With light/surge voltage suppressor (Non-polar









Series SY3000: Serial Transmission Unit/Plug-in

SS5Y3-45S□-Stations U-C4, N3 -Q (for SI unit types C, Q, R1, R2 and V)

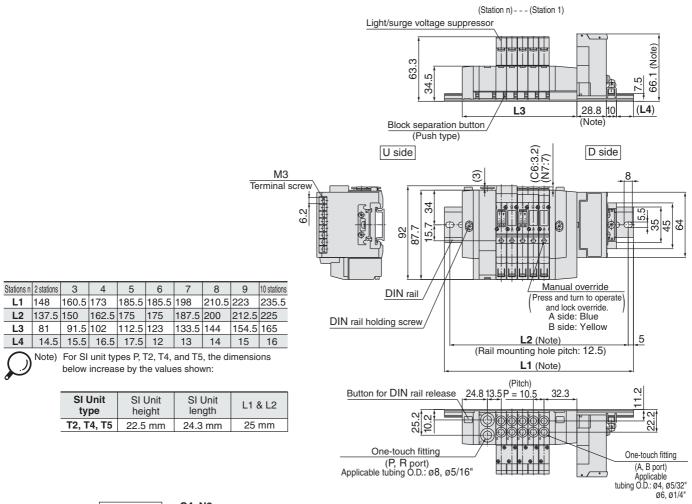


SS5Y3-45S□-Stations B-C4, N3 -Q (for SI unit types C, Q, R1, R2 and V)

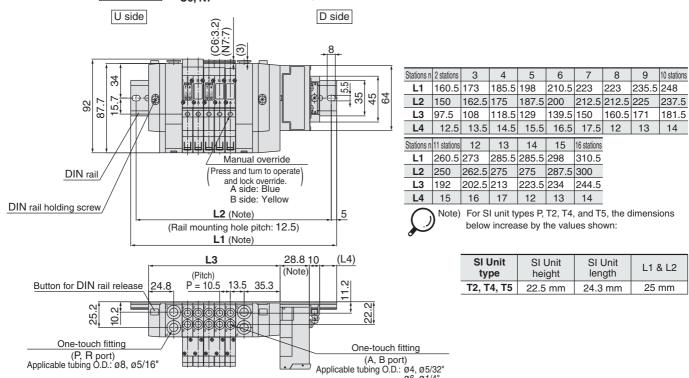


ø8', ø5/16"

Series SY5000: Serial Transmission Unit/Plug-in

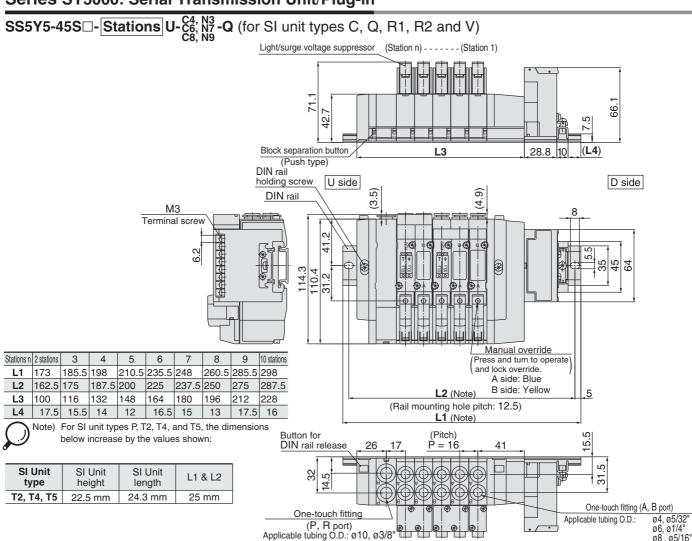

SS5Y5-45S□-Stations B-C6, N7 -Q (for SI unit types C, Q, R1, R2 and V)

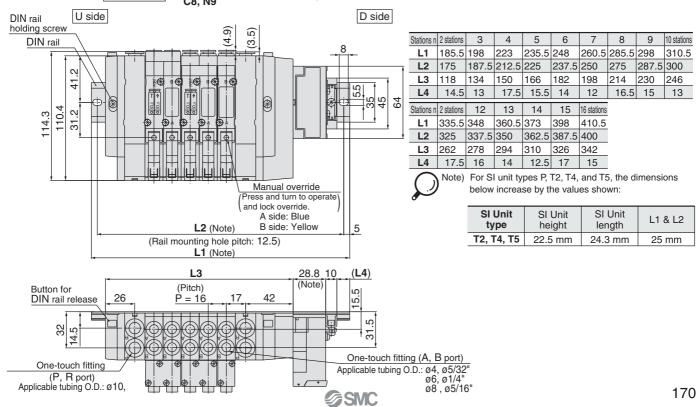



5 Port Solenoid Valve Series SY3000/5000 Base Mounted Stacking Type/DIN Rail Mounted Serial Transmission Unit (Separate type)



How to Order Manifold

Series •
3 SY3000
5 SY5000

SI unit specifications

Symbol	Protocol type
0	Without SI unit
Q	DeviceNet®
٧	CC-LINK
ZB	CompoNet® (Positive common)
ZBN	CompoNet® (Negative common)

Even though when it is not equipped with SI unit, DIN rail length is long enough for future expectancy of mounting SI unit. When a shorter rail is required (same as type 45

), suffix "0" in the optional blank at the end of part number.

Option

When a longer DIN rail is desired than the specified stations, specify the station number to be required. (Max. 16 stations)

A, B port size

One-touch fitting (Metric size)

0110 101	ion numg (mound dizo)		
Symbol	Port size	Applicable series	
C4	One-touch fitting for ø4		
C6	One-touch fitting for ø6	SY3000	
M	Mixed		
C4	One-touch fitting for ø4		
C6	One-touch fitting for ø6	SY5000	
C8	One-touch fitting for ø8	313000	
M	Mixed		

One-touch fitting (Inch size)

One-touch litting (inten size)				
Symbol	Port size	Applicable series		
N3	One-touch fitting for ø 5/32"			
N7	One-touch fitting for ø 1/4"	SY3000		
M	M Mixed			
N3	One-touch fitting for ø 5/32"			
N7	One-touch fitting for ø 1/4"	SY5000		
N9	N9 One-touch fitting for ø 5/16"			
M	Mixed			

^{*} In the case of mixed specifications, indicate separately on the manifold specification sheet.

SUP/EXH block assembly mounting position

Symbol	Mounting position	Stations		
U	U side	2 to 10 stations		
D	D side	2 to 10 stations		
В	Both sides	2 to 16 stations		
М	Special specifications			

 For special specifications, indicate separately by the manifold specification sheet.

SI unit mounting position

or unit mounting pot					
Symbol Mounting position					
U	U side				
D	D side				

Valve stations

Symbol	Stations	Note
02	2 stations	Single wiring spec.
:	:	(Applicable up to 16
16	16 stations	solenoid valves.)

- * This also includes the number of blanking plate assemblies
- * Two stations are necessary for the double, and 3 position solenoid valves (Dual body type).

SI Unit Part No.

Symbol	Protocol type	SI unit No.
Q	DeviceNet®	EX121-SDN1
٧	CC-LINK	EX121-SMJ1
ZB	CompoNet® (Positive common)	EX121-SCM1
ZBN	CompoNet® (Negative common)	EX121-SCM3

• For external pilot specifications and built-in silencer, refer to pages 203 to 207.

SY3000/5000 Base Mounted I




How to Order Valve Manifold Assembly (Example)

Example Double solenoid (24 VDC) SY3245-5FU-Q Single solenoid (24 VDC) SY3140-5FU-Q U side Stations D side Manifold base (5 stations) SS5Y3-45S1BD-05U-C6-Q S5Y3-45S1CD-05U-C6-Q 1 set (Type 45S1 with serial unit 5 station manifold base part no.) * SY3140-5FU-Q 3 sets (Single solenoid part no.) * SY3245-5FU-Q 1 set (Double solenoid part no.) The asterisk denotes the symbol for assembly. Prefix it to the part nos. of the solenoid valve, etc • The valve arrangement is numbered as the 1st. station from D side regardless of the mounting position of SI unit. · When ordering double solenoid valves/3 position (Dual body type), please

keep in mind that they require two manifold stations

How to Order Valve




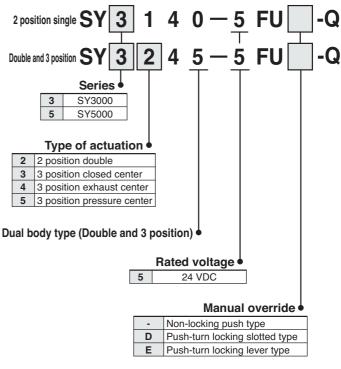

- * When ordering plug-in type solenoid valve as a single unit, gaskets are not included. Order them separately, if necessary.
- * With light/surge voltage suppressor (Non-polar type)



SY3000: Serial Transmission Unit/Plug-in

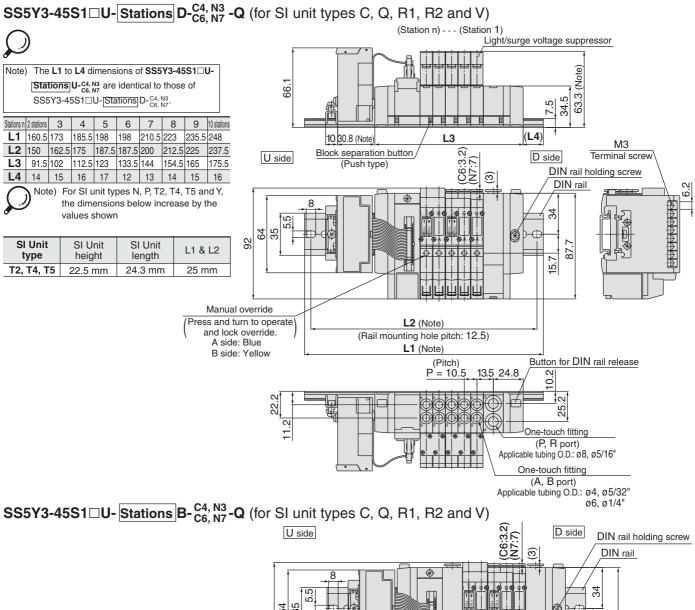

Stations n	2 stations	3	4	5	6	7	8	9	10 stations
L1	173	185.5	198	210.5	223	235.5	235.5	248	260.5
L2	162.5	175	187.5	200	212.5	225	225	237.5	250
L3	108	118.5	129	139.5	150	160.5	171	181.5	192
L4	12	13	14	15	16	17	12	13	14
	_		_						


Stations n	11 stations	12	13	14	15	16 stations
L1	273	285.5	298	298	310.5	323
L2	262.5	275	287.5	287.5	300	312.5
L3	202.5	213	223.5	234	244.5	255
L4	15	16	17	11.5	12.5	13.5

Note) Width of SI unit applicable to "E":

Matsushita Electric Works, Ltd. and "G":

Rockwell Automation, Inc. (Allen-Bradley)
widens to [24.3 mm.] For further
information, please consult with SMC.

	ypes o, a, m, me and v	
U side	(C6:3.2)	DIN rail holding screw DIN rail
92 64 64 35	8	87.7
·	Manual override (Press and turn to operate) and lock override. A side: Blue B side: Yellow (Rail mounting hole pitch: 12.5) L1 (Note)	

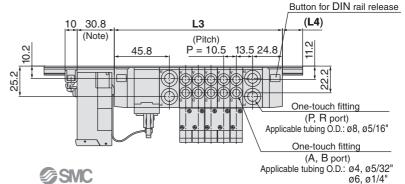

Light/surge voltage suppressor

One-touch fitting

(P, R port)

Applicable tubing O.D.: Ø8, Ø5/16"

One-touch fitting

(A, B port)

Applicable tubing O.D.: Ø4, Ø5/32"




SY3000: Serial Transmission Unit/Plug-in

SS5Y3-45S1 \square **D-** Stations U- $^{\text{C4}, \, \text{N3}}_{\text{C6}, \, \text{N7}}$ -Q (for SI unit types C, Q, R1, R2 and V)




Note) The L1 to L4 dimensions of SS5Y3-4SS1 \square D-Stations D-C4, N3 are identical to those of SS5Y3-45S1 \square D-Stations U-C4, N3.



Stations n	2 stations	3	4	5	6	7	8	9	10 stations
L1	160.5	173	185.5	198	198	210.5	223	235.5	248
L2	150	162.5	175	187.5	187.5	200	212.5	225	237.5
L3	91.5	102	112.5	123	133.5	144	154.5	165	175.5
L4	14	15	16	17	12	13	14	15	16

Note) For SI unit types P, T2, T4, and T5, the dimensions below increase by the values shown:

SI Unit type	SI Unit height	SI Unit length	L1 & L2	
T2, T4, T5	22.5 mm	24.3 mm	25 mm	

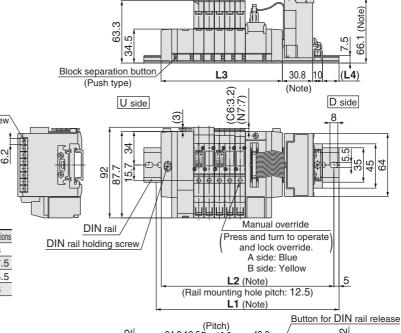


(Station n)- - (Station 1)

SS5Y3-45S1□D-Stations B-C4, N3 -Q (for SI unit types C, Q, R1, R2 and V)

Stations n	2 stations	3	4	5	6	7	8	9	10 stations
L1	173	185.5	198	210.5	223	235.5	235.5	248	260.5
L2	162.5	175	187.5	200	212.5	225	225	237.5	250
L3	108	118.5	129	139.5	150	160.5	171	181.5	192
L4	12	13	14	15	16	17	12	13	14
Stations n	11 stations	12	13	14	15	16 stations			
L1	273	285.5	298	298	310.5	323			
L2	262.5	275	287.5	287.5	300	312.5			
L3	202.5	213	223.5	234	244.5	255			
L4	15	16	17	11.5	12.5	13.5			


Note) For SI unit types P, T2, T4, and T5, the dimensions below increase by the values shown:

SI Unit type	0.01		L1 & L2
T2, T4, T5	22.5 mm	24.3 mm	25 mm

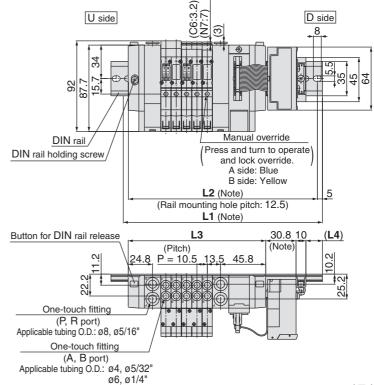




SY5000: Serial Transmission Unit/Plug-in

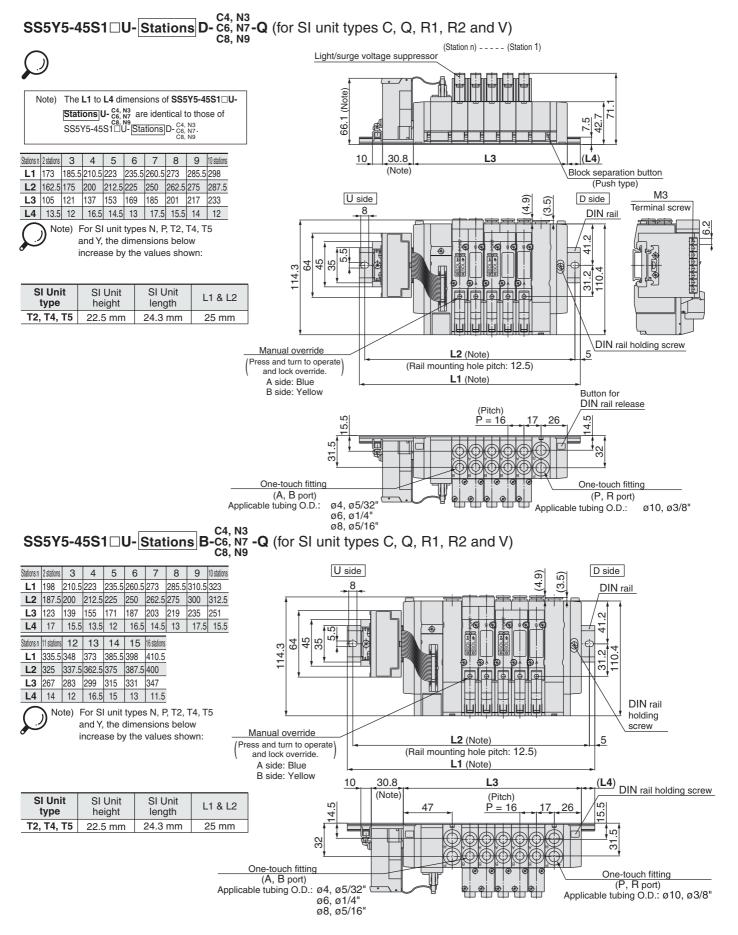



SY5000: Serial Transmission Unit/Plug-in

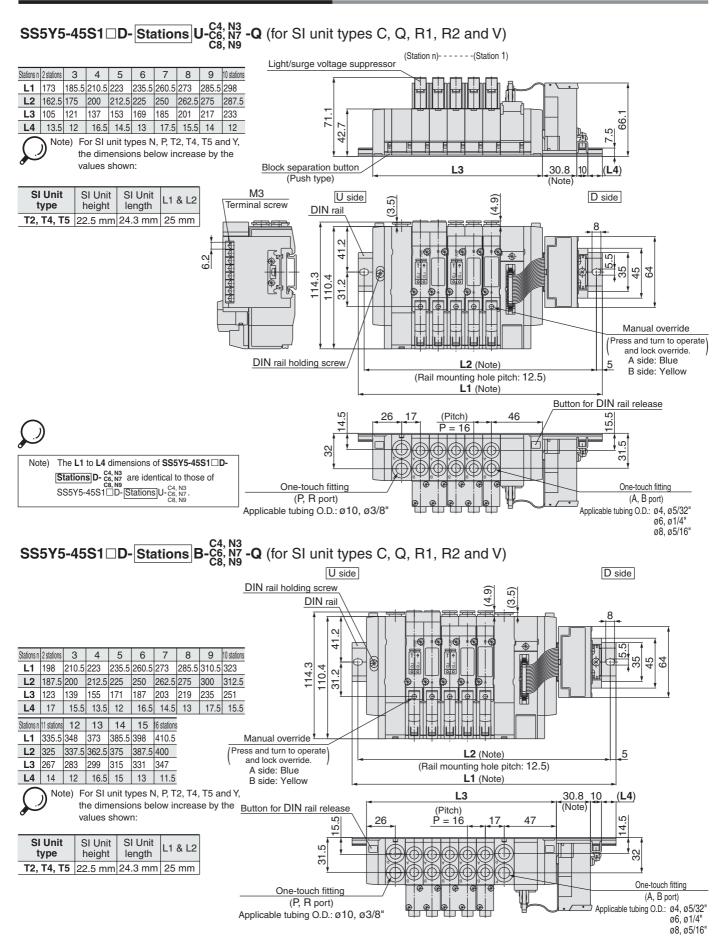




EX510 Gateway-type Serial Transmission System Base Mounted Manifold/Stacking Type/Plug-in Type

Series SY3000/5000

How to Order Manifold

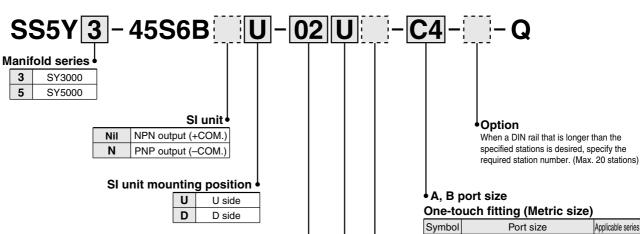

Valve stations


Symbol	Stations	Note
02	2 stations	
:		Compatible with 16 solenoid valves
16	16 stations	

^{*}The number of the blanking plate assembly is also included.

SI unit part no.

Symbol	SI unit specifications	SI unit part no.
Nil	NPN output (+COM.)	EX510-S002A
N	PNP output (-COM.)	EX510-S102A

How to Order Manifold Assembly (Example)

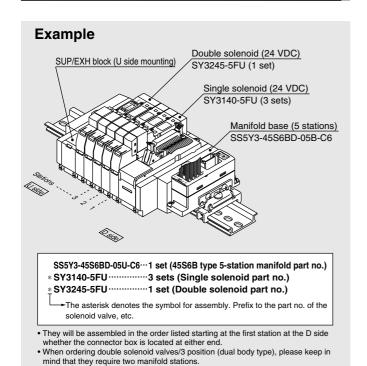

One-touch fitting (Metric size)

<u></u>						
Symbol	Port size	Applicable series				
C4	C4 One-touch fitting for ø4					
C6	One-touch fitting for ø6	SY3000				
M	Mixed					
C4	One-touch fitting for ø4					
C6	One-touch fitting for ø6	SY5000				
C8	One-touch fitting for ø8					
M	Mixed					

One-touch fitting (Inch size)

Symbol	Port size	Applicable series	
N3	One-touch fitting for ø5/32"		
N7	One-touch fitting for ø1/4"	SY3000	
М	Mixed		
N3	One-touch fitting for ø5/32"		
N7	One-touch fitting for ø1/4"	SY5000	
N9	One-touch fitting for ø5/16"	5 7 5 0 0 0	
М	Mixed		

For the mixed specification, indicate separately on a manifold specification sheet.

Pilot specifications

Nil	Internal pilot
S	Internal pilot/built-in silencer
R	External pilot
RS	External pilot/built-in silencer

SUP/EXH block assembly mounting position


U	U side	2 to 10 stations				
D	D side	2 to 10 stations				
В	Both sides	2 to 16 stations				
М	Special specifications*					

^{*}For the special specifications, indicate separately on a manifold specification sheet.



How to Order Valves



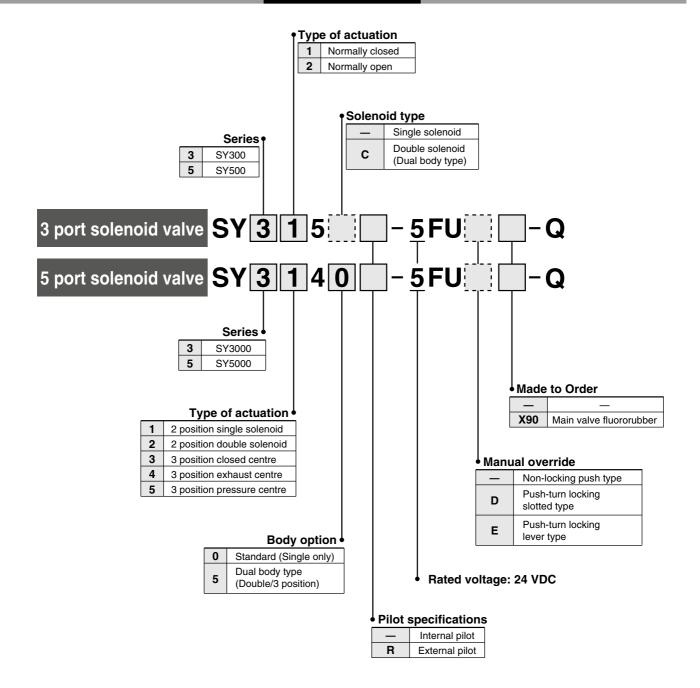


- * When ordering plug-in type solenoid valve as a single unit, gaskets are not included. Order them separately, if necessary.
- * With light/surge voltage suppressor (Non-polar type)





1ype 45S6B Series SY3000/5000


Dimensions

SS5Y3-45S6B D- Stations U-C4, N3

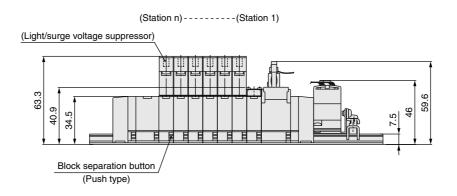



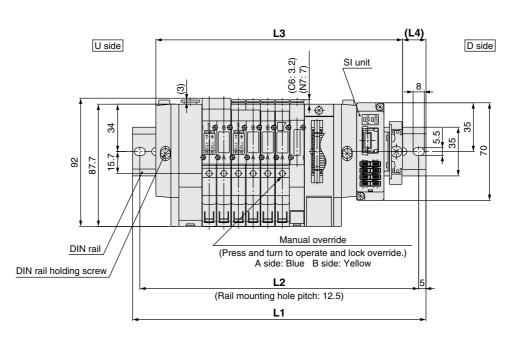

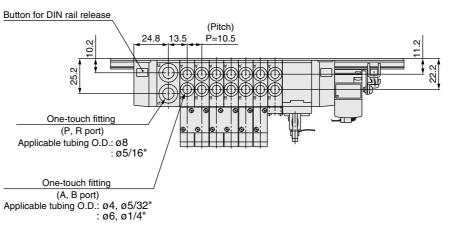

L:	Dimensions


L: DIM	L: Dimensions n: Station								: Stations
L	2	3	4	5	6	7	8	9	10
L1	148	160.5	173	185.5	198	210.5	223	223	235.5
L2	137.5	150	162.5	175	187.5	200	212.5	212.5	225
L3	124.5	135	145.5	156	166.5	177	187.5	198	208.5
L4	12	13	14	15	16	17	18	12.5	13.5


176-3





Dimensions

SS5Y3-45S6B U- Stations B-C4, N3

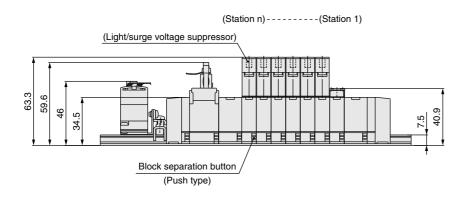

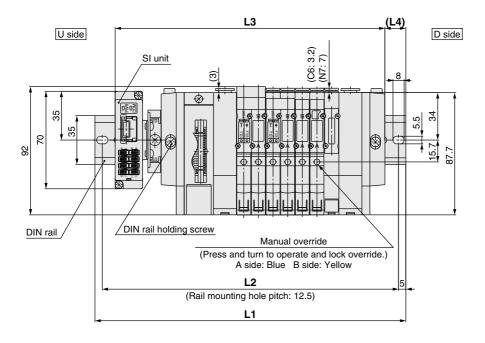



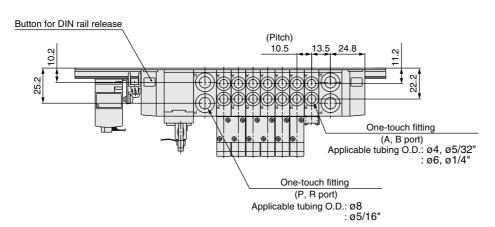



L: Dimensions n: Stations															
L	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
L1	173	185.5	198	198	210.5	223	235.5	248	260.5	273	273	285.5	298	310.5	323
L2	162.5	175	187.5	187.5	200	212.5	225	237.5	250	262.5	262.5	275	287.5	300	312.5
L3	141	151.5	162	172.5	183	193.5	204	214.5	225	235.5	246	256.5	267	277.5	288
L4	16	17	18	13	14	15	16	17	18	19	13.5	14.5	15.5	16.5	17.5


1ype 45S6B Series SY3000/5000

Dimensions

SS5Y5-45S6B D- Stations U-C6, N7 C8, N9

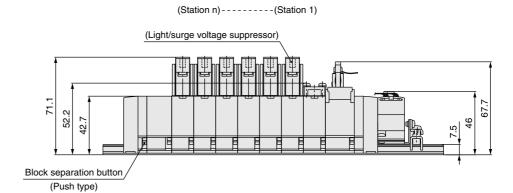

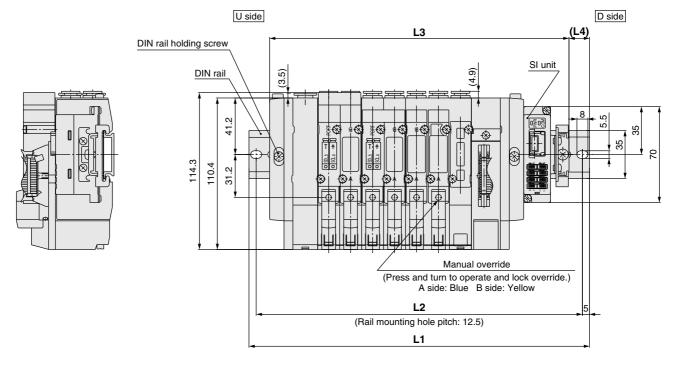

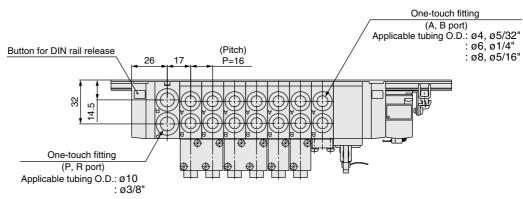


L: Dimensions n: Stations											
L	2	3	4	5	6	7	8	9	10		
L1	173	185.5	198	210.5	235.5	248	260.5	285.5	298		
L2	162.5	175	187.5	200	225	237.5	250	275	287.5		
L3	138	154	170	186	202	218	234	250	266		
14	17.5	16	14	12.5	17	15	13.5	18	16		

176-5



Manifold Option

Blanking plate assembly



Series	Assembly part no.
SY3000	SX3000-75-2A-Q
SY5000	SX5000-76-6A-Q

Note) • When mounting blanking plate, be sure to mount a short cap.

> • Two stations are necessary for the double, 3 position (Dual body type).

■SUP blocking disk

By installing a SUP blocking disk in the pressure supply passage of a manifold valve, it is possible to supply two or more different high and low pressures to one manifold.



Series	Part no.
SY3000	SX3000-77-1A
SY5000	SX5000-77-1A

■ EXH blocking disk

By installing an EXH blocking disk in the exhaust passage of a manifold valve, it is possible to divide the valve's exhaust so that it does not affectanother valve. (Two blocking disks are needed to divide both exhausts.)



Series	Part no.
SY3000	SX3000-77-1A
SY5000	SX5000-77-1A

Label for block disk

The labels shown below are used on manifold stations containing SUP/EXH block disk(s) to show their location. (3 pcs. each)

VZ3000-123-1A (In common with SY3000, 5000)


Label for SUP block disk Label for EXH block disk Label for SUP/EXH block disk








Note) When a block disk is concurrently ordered by specifying on the manifold specification sheet, etc., a label will be stuck on the position where block disk is mounted.

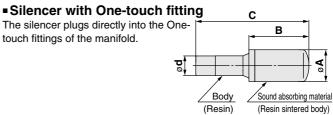

Series	Model	Effective area mm²	Α	В	С
For SY3000 (Ø8)	AN15-C08	20	ø13	20	45
For SY5000 (Ø10)	AN20-C10	30	ø16.5	30.5	57.5

These are inserted in unused cylinder ports and Q SUP, EXH ports. Purchasing order is available in units of 10 pieces.



Dimensions


Applicable fittings size ød	Model	Α	L	D
4	KQ2P-04	16	32	6
6	KQ2P-06	18	35	8
8	KQ2P-08	20.5	39	10
10	KQ2P-10	22	43	12
1/8"	KQ2P-01	16	31.5	5
5/32"	KQ2P-03	16	32	6
1/4"	KQ2P-07	18	35	8.5
5/16"	KQ2P-09	20.5	39	10


∕!\ Caution

Mounting screw tightening torques

M2: 0.16 N·m M3: 0.8 N·m M4: 1.4 N·m

■ Individual EXH spacer assembly ■ Individual SUP spacer assembly





	Assembly part no.		
	SY3000-39-3A-Q		
SY5000	SY5000-39-17A-Q	1/8	15

Note) Please be careful because the
dual body type (double solenoid,
3-position) requires two pieces.
In this case, the exhaust is
performed in the direction of the
arrow mark indicated on the
valve surface.

	Assembly part no.		
	SY3000-38-3A-Q		11
SY5000	SY5000-38-17A-Q	1/8	15

Note) Please be careful because the dual body type (double solenoid, 3-position) requires two pieces. In this case, both supply ports require the piping.

3 Port Valve Series SY300/500 Mixed Mounting Type on 5 Port Valve Manifold


3 port valve can be mounted on manifold for 5 port valve.

Applications


Possible to be mounted on all kinds of manifolds for Series SY3000/5000.

Refer to "How to Order Manifold" for the details.

How to Order Valve Manifold Assembly (Example)

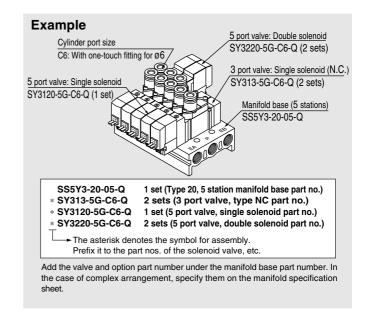

Body Ported/How to Order Valve

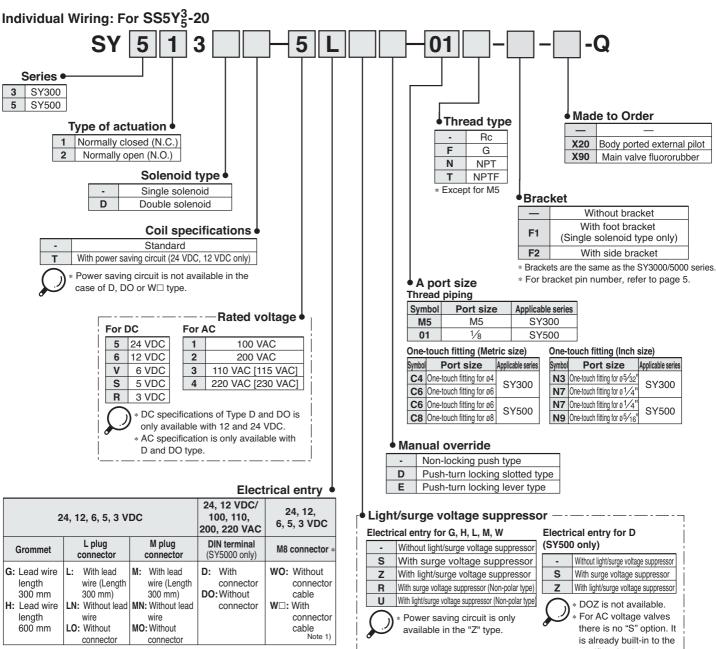

- * LN, MN type: with 2 sockets.
- * For DIN terminal of SY300 series, refer to page 228.
- * DIN terminal type "Y" which conforms to EN-175301-803C (former DIN43650C) is also available. For details, refer to page 227.
- * For connector cable of M8 connector, refer to page 230.
- * Connector M8 type "WA" conforming to IEC 60947-5-2 standard, is also available. For details, see page 211.

Note 1) Enter the cable length symbols in □. Please be sure to fill in the blank referring to page 231.




When placing an order for body ported solenoid valve as a single unit, mounting bolt for manifold and gasket are not attached. Order them separately, if necessary. (For details, refer to page 56.)

rectifier circuit.



(€ CA


Body Ported/How to Order Valve

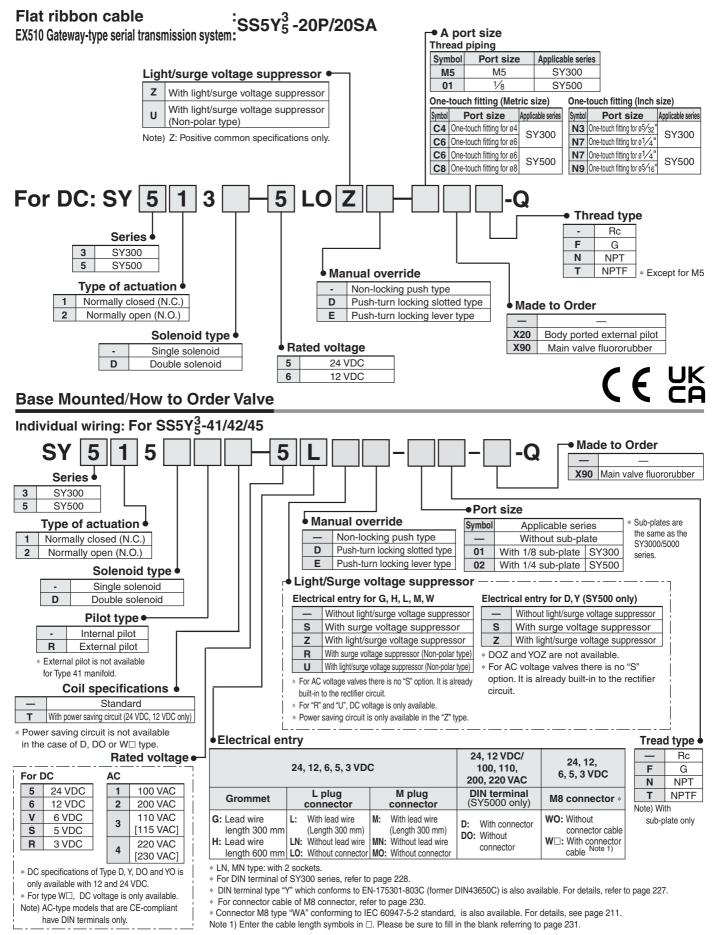




Base Mounted/How to Order Valve


Flat ribbon cable: For SS5Y₅³-41P/42P/45-A

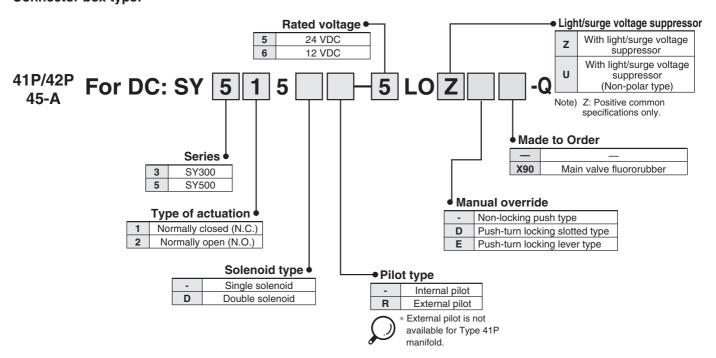



Plug-in: For SS5Y₅³-45□

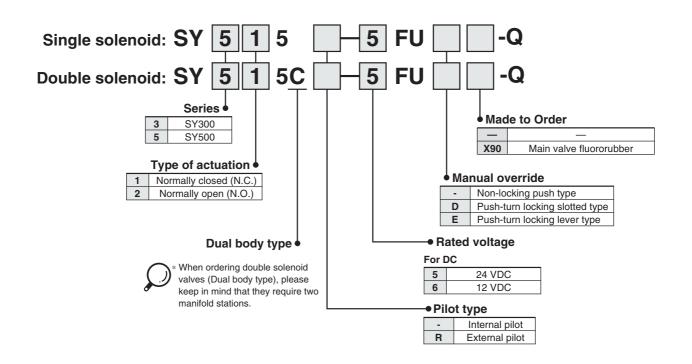


Construction: Body ported

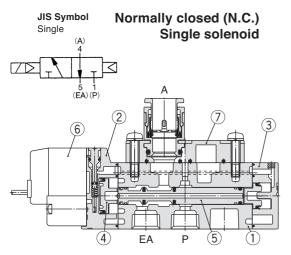

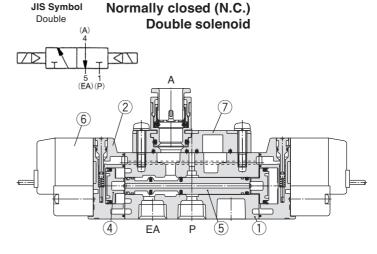

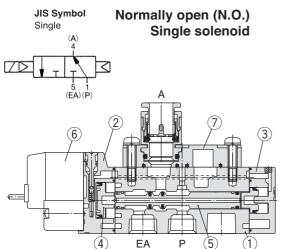

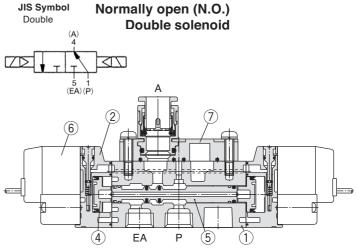


Component Parts

	•		
No.	Description	Material	Note
1	Body	Aluminum die-casted (SY3000: Zinc die-casted)	White
2	Adapter plate	Resin	White
3	End plate	Resin	White
4	Piston	Resin	-
5	Spool valve assembly	Aluminum H-NBR	

Replacement Parts

No.	Description	No.
6	Pilot valve assembly	Refer to "How to Order Pilot Valve Assembly" on page 218.
7	M5 port block assembly	Refer to "How to Order Port Block Assembly" below.

How to Order M5 Port Block Assembly

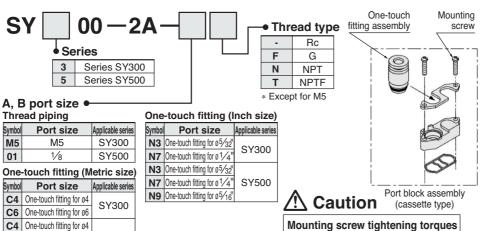

Metric size

possible.

SY300	One-touch fitting for ø4	VVQ1000-50A-C4
31300	One-touch fitting for ø6	VVQ1000-50A-C6
	One-touch fitting for ø4	VVQ1000-51A-C4
SY500	One-touch fitting for ø6	VVQ1000-51A-C6
	One-touch fitting for ø8	VVQ1000-51A-C8

* Only replacement of the fittings assembly is

Inch size

SY300	One-touch fitting for ø5/32"	VVQ1000-50A-N3
31300	One-touch fitting for ø 1/4"	VVQ1000-50A-N7
	One-touch fitting for ø5/32"	VVQ1000-51A-N3
SY500	One-touch fitting for ø 1/4"	VVQ1000-51A-N7
	One-touch fitting for ø5/16"	VVQ1000-51A-N9

SY300 (M2) : 0.12 N·m SY500 (M3) : 0.6 N·m

C6 One-touch fitting for ø6

C8 One-touch fitting for ø8


SY500

Construction: Base Mounted





Normally closed (N.C.)







Normally closed (N.C.) Double solenoid



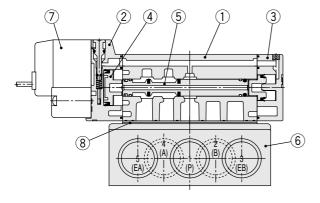

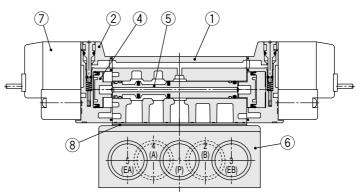





Normally open (N.O.) Single solenoid

Symbol Double 4(A) (EA)5 1(P)

Normally open (N.O.) Double solenoid

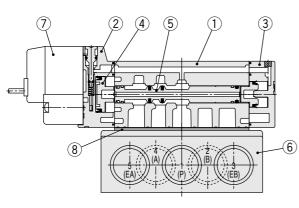

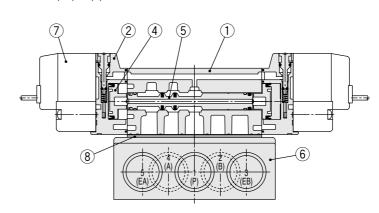

Component Parts

No.	Description	Material	Note
1	Body	Aluminium die-casted (SY3000: Zinc die-casted)	White
2	Adapter plate	Resin	White
3	End plate	Resin	White
4	Piston	Resin	
5	Spool valve assembly	Aluminium, H-NBR	_

Replacement Parts

110	iepiacement i aits						
No	No. Description			Part No.			
INO.			SY3□40	SY5□40	SY7□40	Note	
6	Sub-pla	te ^{Note)}	SY3000-27-1®	SY5000-27-1®	1/ ₄ :SY7000-27-1* 3/ ₈ :SY7000-27-2*	Aluminum die-casted	
7	7 Pilot valve assembly		Refe	Refer to "How to Order Pilot Valve Assembly" on page 218.			
8	Gasket	Standard	SY3000-11-25	SY5000-11-15	SY7000-11-11	H-NBR	
•	Gasket	CE-compliant	SY3000-11-25	SY5000-11-18	SY7000-11-14	n-NDN	
	Round head combination screw		SY3000-23-4	AC00077	AC00296	For valve mounting	
_	Reference screw size		(M2 x 21)	(M3 x 26)	(M4 x 31)	(Matt nickel plated)	



Mounting screw tightening torques

M2: 0.16 N·m M3: 0.8 N·m M4: 1.4 N·m







Weight

Body ported

SY300 series

Valve model	Turns of actuation	Weight (g)		
valve model	Type of actuation	Grommet	L, M plug connector	
SY3□3-□□-M5	Single	51	53	
313U3-UU-W3	Double	68	74	
SY3□3-□□-C4	Single	56	59	
513U3-UU-N3	Double	74	79	
SY3□3-□□- ^{C6}	Single	54	57	
313U3-UU-N7	Double	72	77	

SY500 series

0.000.00.00					
Valve model	Type of actuation	Weight (g)			
valve model	Type of actuation	Grommet	L, M plug connector	DIN terminal	
SY5□3-□-01□	Single	69	72	93	
31303-0-010	Double	87	93	135	
SY5□3-□- ^{C4}	Single	82	82	103	
515□3-□-N3	Double	100	102	144	
SY5□3-□- ^{C6}	Single	79	77	98	
313U3-U-N7	Double	97	98	140	
SY5□3-□- ^{C8}	Single	75	84	105	
319 N9	Double	93	105	147	

Base mounted SY300 series

Valve model	Type of actuation	Note)Weight (g)		
valve model	Type of actuation	Grommet	L, M plug connector	
SY3□5-□□	Single	47(82)	50(85)	
51305-00	Double	65(100)	70(105)	

Note) The values shown in () are for values with sub-plate.

SY500 series

Valve model	Type of actuation	Note)Weight (g)		
valve model	Type of actuation	Grommet	L, M plug connector	DIN terminal
SY5□5-□□	Single	55(118)	58(121)	79(142)
313⊔3-⊔⊔	Double	73(136)	78(141)	120(183)

Note) The values shown in () are for values with sub-plate.





5 Port Solenoid Valve Series **SY3000/5000 Made to Order** External Pilot/Built-in Silencer





External pilot manifold bases for low-pressure/vacuum use are added to split style/DIN rail manifolds. The built-in silencer has materialised a clear-cut appearance.

Individual Wiring/Connector Box Type

How to Order Manifold

SS5Y₅-45(-A)-05||U||R|-C6| Series **3** SY3000 **5** SY5000 Option Valve stations ● When a longer Symbol Stations SUP/EXH block assembly mounting position DIN rail is 02 2 stations desired than the Symbol Mounting position Stations : specified U U side 20 20 stations stations, specify D D side The number of the station В Both sides 2 to 20 stations blanking plate number to be М Special specifications assembly is required. (Max. included. For special specifications, indicate 20 stations) separately by the manifold specification SUP/EXH block assembly specifications Symbol Specifications R External pilot specifications S Internal pilot/Built-in silencer RS External pilot/Built-in silencer


One-touch fitting (Metric size)					
Symbol	Port size	Applicable series			
C4	One-touch fitting for ø4				
C6	One-touch fitting for ø6	SY3000			
М	Mixed				
C4	One-touch fitting for ø4				
C6	One-touch fitting for ø6	+ SY5000			
C8	One-touch fitting for ø8				
М	Mixed				

A, B port size One-touch fitting (Inch size)

		· · ,
Symbol	Port size	Applicable series
N3	One-touch fitting for ø5/32"	
N7	One-touch fitting for ø 1/4"	SY3000
M	Mixed	
N3	One-touch fitting for ø5/32"	
N7	One-touch fitting for ø 1/4"	SY5000
N9	One-touch fitting for ø5/16"	313000
M	Mixed	

^{*} In the case of mixed specifications, indicate separately on the manifold specification sheet.

How to Order Valve Manifold Assembly (Example)

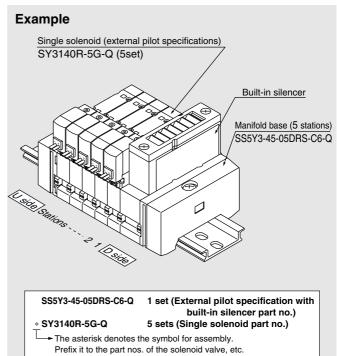

The valve arrangement is numbered as the 1st. station from D side regardless of the mounting position of SUP/EXH block assembly. In ordering, specify the part nos. in the order from the 1st. station on D side. Besides, when the arrangement will

be complicated, fill out the manifold specification sheet to instruct us. For manifolds with SUP/EXH block assembly at each end of the manifold, external

pilot ports and silencers will be also located at each end of the manifold.


The SUP/EXH block assembly (SX3/5000_51_1A), for special usage, as shown on page 125, can also be mounted. Please specify the mounting position, by correctly filling in the blank space on the manifold specification sheet.

SY3000/5000 Made to Order Type





How to Order Valve

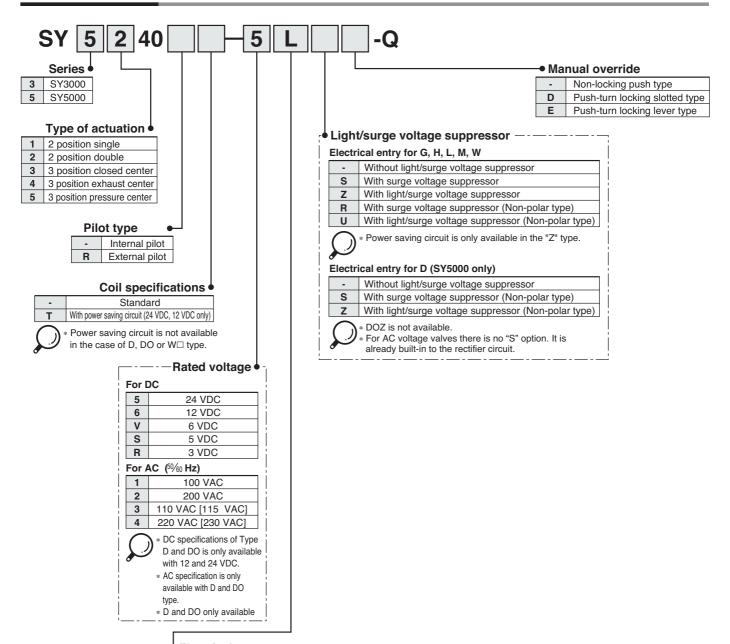

Electrical entry

24, 12, 6, 5, 3 VDC			24, 12 VDC/ 100, 110, 200, 220 VAC	24, 12, 6, 5, 3 VDC	
Grommet	L plug connector	M plug connector	DIN terminal	M8 connector *	
G: Lead wire length 300 mm H: Lead wire length 600 mm	L: With lead wire (Length 300 mm) LN: Without lead wire LO: Without connector	(Length 300 mm)	D: With connector	WO: Without connector cable W□: With connector cable	



* LN, MN type: with 2 sockets


- * D and DO only available for SY5000.
- * DIN terminal type "Y" which conforms to EN-175301-803C (former DIN43650C) is also available. For details, refer to page 227.
- * Setting "-5LOU" is available only for connector box type.
- * For connector cable of M8 connector, refer to page 230.
- Note 1) Enter the cable length symbols in □. Please be sure to fill in the blank referring to back page 211.



(€ CA

Plug-in

How to Order Manifold

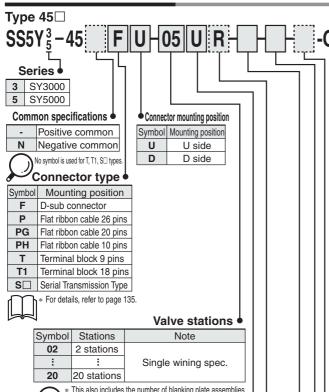



- * This also includes the number of blanking plate assemblies. * Depending on the connector, the number of stations is limited. Refer to page 138.
- * Two stations are necessary for the double, 3 position solenoid valve (Dual body type).

SUP/EXH block assembly mounting position

		<u> </u>
Symbol	Mounting position	Stations
U	U side	O to 10 ototions
D	D side	2 to 10 stations
В	(Both sides)	2 to 20 stations
М	Special s	pecifications

* For special specifications, indicate separately by the manifold specification

SUP/EXH block assembly specifications

		<u> </u>	
	Symbol	Specifications	
	R External pilot specifications		
S Internal pilot/Built-in silencer		Internal pilot/Built-in silencer	
	RS	External pilot/Built-in silencer	

One-touch fitting (Metric size)

One-touch fitting (Metric Size)					
Symbol	Port size	Applicable series			
C4	One-touch fitting for ø4				
C6	One-touch fitting for ø6	SY3000			
M	Mixed				
C4	One-touch fitting for ø4				
C6	One-touch fitting for ø6	SY5000			
C8	One-touch fitting for ø8				
M	Mixed				

A, B port size One-touch fitting (Inch size)

Port size	Applicable series	
One-touch fitting for ø5/32"		
One-touch fitting for ø1/4"	SY3000	
Mixed		
One-touch fitting for ø5/32"		
One-touch fitting for ø1/4" SY5000		
One-touch fitting for ø5/16"		
Mixed		
	One-touch fitting for $\mathfrak{o}5/32$ " One-touch fitting for $\mathfrak{o}1/4$ " Mixed One-touch fitting for $\mathfrak{o}5/32$ " One-touch fitting for $\mathfrak{o}5/32$ " One-touch fitting for $\mathfrak{o}5/32$ " One-touch fitting for $\mathfrak{o}5/16$ "	

* In the case of mixed specifications, indicate separately on the manifold specification sheet.


_		voitage -
	-	24 VDC
	12V	12 VDC

No symbol is used for T, T1, S□ types.

Option

When a longer DIN rail is desired than
the specified stations, specify the
station number to be required.
(20 stations at maximum)

How to Order Valve Manifold Assembly (Example)

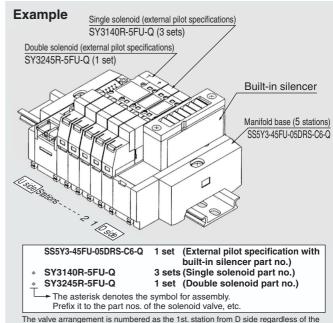

The valve arrangement is numbered as the 1st. station from D side regardless of the mounting position of SUP/EXH block assembly. In ordering, specify the part nos. in the order from the 1st. station on D side. Besides, when the arrangement will be complicated, fill out the manifold specification sheet to instruct us.


complicated, fill out the manifold specification sheet to instruct us.

For manifolds with SUP/EXH block at each end of the manifold, external pilot ports and silencers will be also located at each end of the manifold.

The SUP/EXH block assembly (\$X3/5000_51_1A), for special usage can also be mounted. Please specify the mounting position, by correctly filling in the blank space on the manifeld specification sheet.

on the manifold specification sheet. Two stations of the manifold base are necessary for the double, 3 position (Dual body type). Use caution when specifying the number of stations required for the manifold base.

How to Order Valve

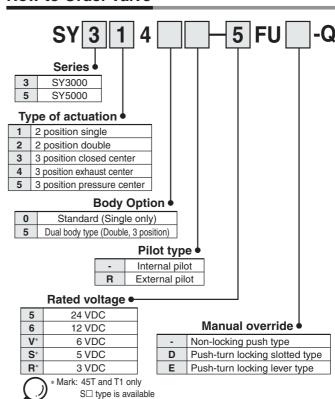


for 24 VDC only.




External Pilot/Built-in Silencer

SY3000: SS5Y3-45-Stations DRS-C4, N3 -Q

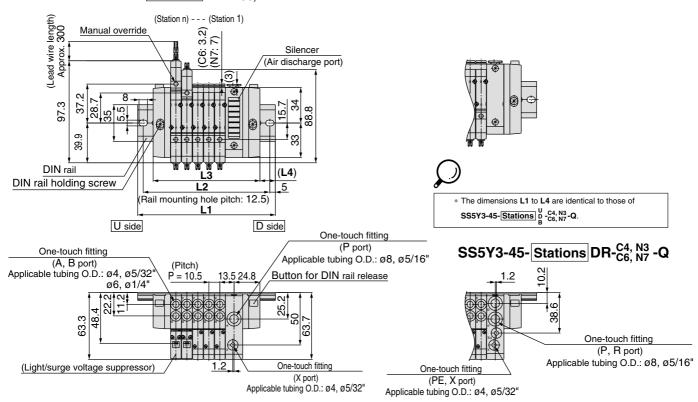


SY5000: SS5Y5-45-Stations DRS-C6, N7 -Q C8, N9

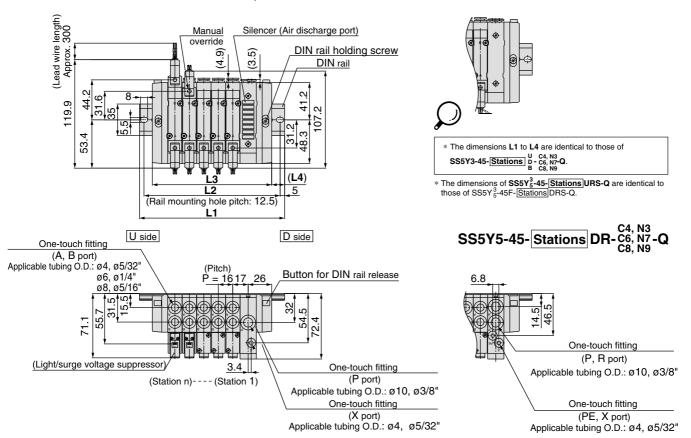



External Pilot/Built-in Silencer

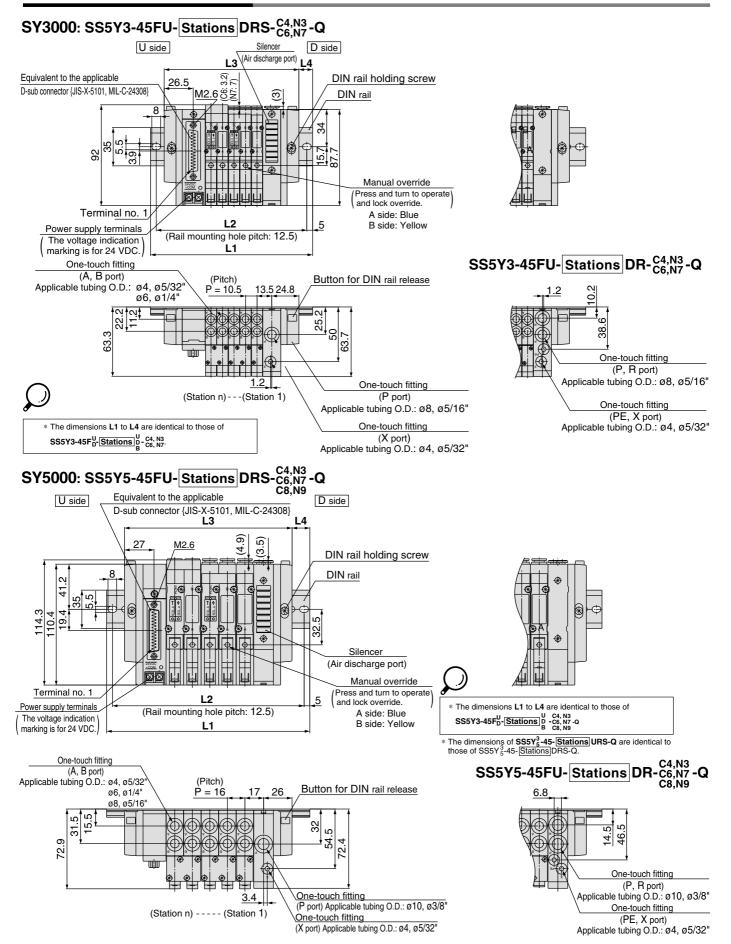






5 Port Solenoid Valve Series SY3000/5000 Made to Order Mixed Mounting Type




Non plug-in

Use SY3000 together with SY5000, which has a large Cv and is mounted only in a place where it is needed, permits a selection of economic manifold bases.

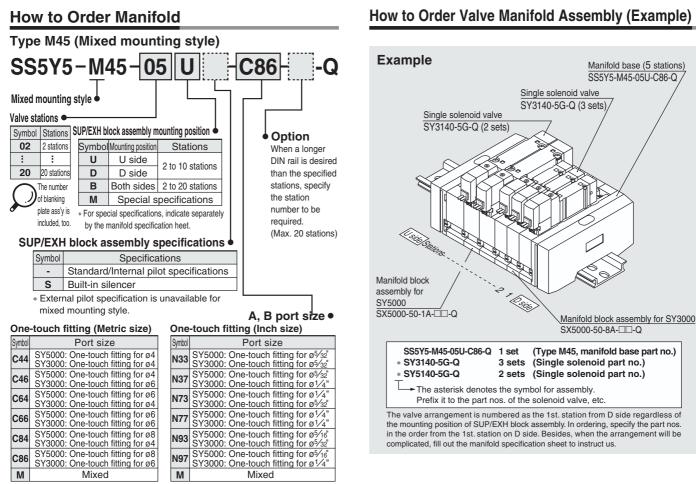

^{*} In the case of mixed specifications, indicate separately on the manifold specification sheet.


How to Order Valve

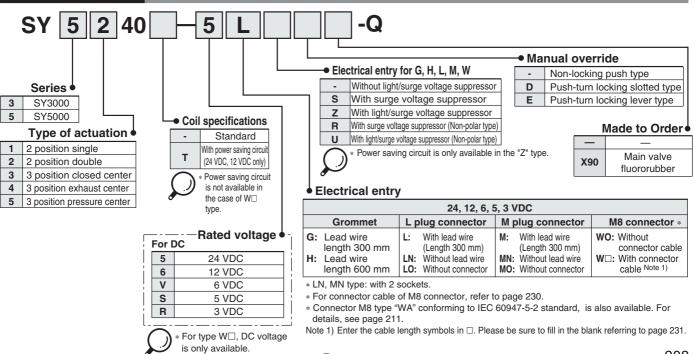

Made to Order

Dimensions: Mixed Mounting

SS5Y5-M45- Stations U-□-Q



Approx. 300 (Lead wire length) (Lead wire length) 17 18 16 x n2 12.5 x n1 17 Approx. 300 12.5 16 (SY5000) 3.2) φ DIN rail 44.2 41.2 9 28. 120 107.4 89 97 ო 53.5 48.3 DIN rail holding screw Manual override (Rail mounting hole pitch: 12.5)


L3

L dimension: Formulae for L1, L4 $L3 = 12.5 \times n1 + 16 \times n2 + 52$ $M = (\frac{L_0}{12.5})$ + 1) Omit decimals $L1 = 12.5 \times M + 23$ L2 = L1-10.5L4= (L1-L3) /2



n1 = Number of SY3000 n2 = Number of SY5000

The L1 to L4 dimensions of SS5Y5-M45-Stations D-Q are identical to those of SS5Y5-M45-Stations U-Q.

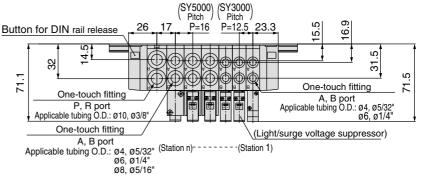


(Lead wire length) Approx. 300

97.5


89

SS5Y5-M45- Stations B-□-Q

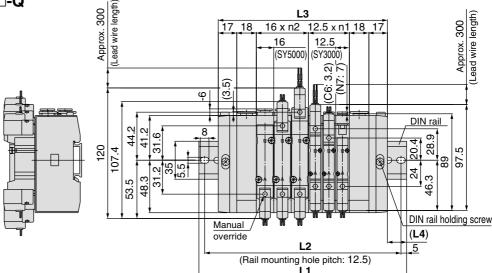

L dimension: Formulae for L1, L4 $L3 = 12.5 \times n1 + 16 \times n2 + 70$ $M = (\frac{L3}{12.5} + 1)$ Omit decimals L1 = 12.5 x M + 23 L2 = L1 - 10.5L4 = (L1 - L3)/2

n1 = Number of SY3000 n2 = Number of SY5000

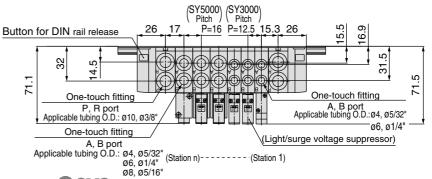

Made to Order Specifications: Series SY3000/5000/7000/9000, SY300/500 M8 Connector Conforming to IEC60947-5-2

M8 Connector type conforming to IEC60947-5-2 standard.

How to Order Valve




SY9000

SY9000

04

With sub-plate

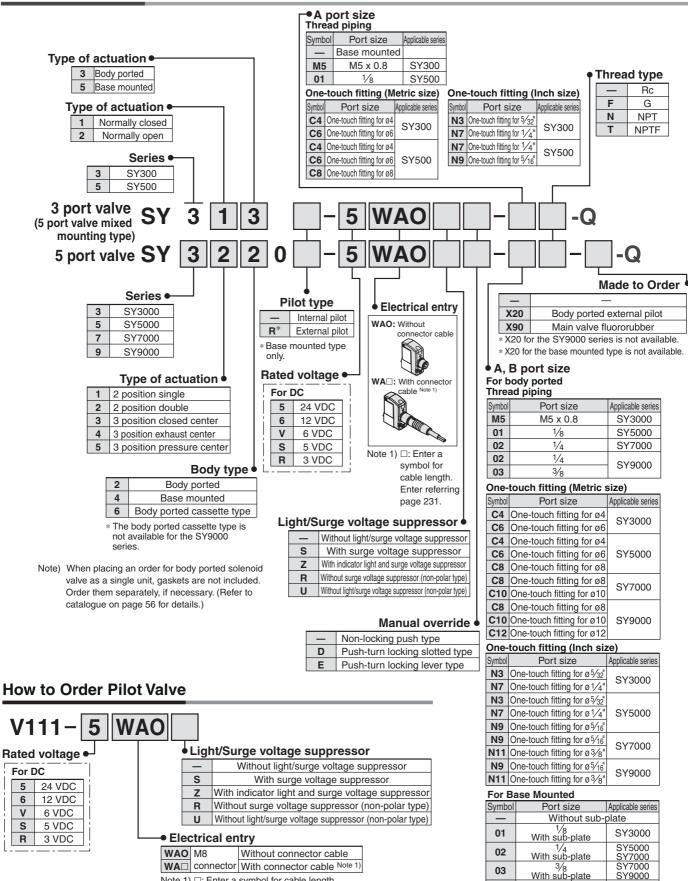


Note 1) □: Enter a symbol for cable length.

5 Port Solenoid Valve Series SY3000/5000/7000/9000 Made to Order Body Ported External Pilot/Fluoro Rubber for Main Value

Body Ported External Pilot

Applicable solenoid valves: SY3□²₆0, SY5□²₆0, SY7□²₆0 series



Note) Din terminal is not available for the SY3000 series.


Operating pressure range MPa

Operating pressure range	-100 kPa to 0.7
Pilot pressure range	0.25 to 0.7

External pilot port

Series	Port size
SY3000	M3 x 0.5
SY ⁵ 7000	M5 x 0.8


Dimensions

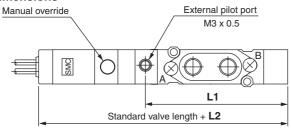


Dimentions/External Pilot Port Position

Series	L1 dimensions	L2 dimensions
SY3000	41.5	6.5
SY5000	60.4	9
SY7000	71.9	9

Symbol



Body ported

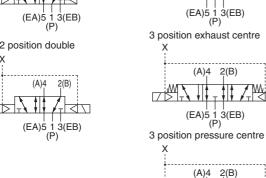

3 position closed centre

2(B)


(EA)5 1 3(EB)

Main Valve Fluororubber Specifications

Fluororubber is used for rubber parts of the main valve to allow use in applications such as the following.

 When using a lubricant other than the recommended turbine oil, and there is a possibility of malfunction due to swelling of the spool valve seals.

Applicable solenoid valves: $SY3 \square_{\frac{4}{5}}^2 0$, $SY5 \square_{\frac{4}{5}}^2 0$, $SY7 \square_{\frac{4}{5}}^2 0$, $SY9 \square_{\frac{4}{5}}^2 0$ series

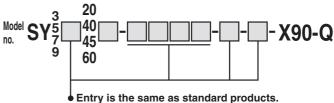

Specifications and performance are the same as standard products.

SY5000 **Made to Order**

Body Ported Vacuum Release Valve with Throttle Valve (E L




Vacuum Release Valve with Throttle Valve: SY5A2R

- Line for vacuum adsorption transfer
- Built-in throttle valve in the vacuum release valve
- Can be mounted on the SS5Y5-20-type (Individual wiring type) and SS5Y5-20P-type (Flat ribbon cable type) Manifold
- Valve effective area

B port	Effective area: mm²		
Port size Note 1)	EA→B Note 2)	B→EB	
C6	4.4	6.8	
C8	4.5	7.0	

Note 1) Refer to the part numbers for the port size. Note 2) When the built-in throttle valve is fully open.



Specifications

Valve type		External pilot type, Dual 2 port solenoid valve	
Type of actuation		Normally closed (N.C. valve)	
Fluid		Air	
	P (External pilot pressure)	0.15 to 0.7 MPa	
Operating pressure range	EA (Vacuum release pressure)	0 to 0.7 MPa	
pressure range	EB (Vacuum)	-100 kPa to 0 MPa	
Pilot valve exhaust method		Pilot valve individual exhaust	
Ambient and fluid temperature		−10 to 50°C (No condensation)	


Effective Area/Weight

B port	Effective	Weight (g)	
Port size Note 1)	EA→B Note 2)		
C6	4.4	6.8	94
C8	4.5	7.0	88

Note 1) Refer to the part numbers for the port size. Note 2) When the built-in throttle valve is fully open.


How to Order

Single unit: External pilot type dual 2 port solenoid valve

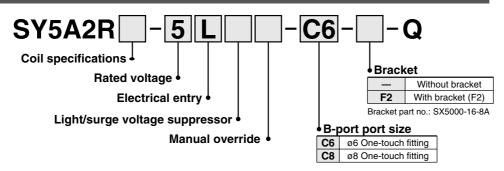

Manifold: Body ported bar stock (20/20P/20SA type)

* Specify the part numbers for valves and options together beneath the manifold base part number in order starting from the first station.

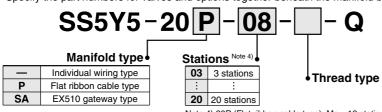


Note 4) 20P (Flat ribbon cable type): Max. 12 stations


Example SS5Y5-20-05 1 set *SY5A2R-5LOU-C6 ··· 5 sets


The asterisk denotes the symbol for assembly. Prefix it to the part nos. of the solenoid valve, etc.




Dimensions/Single Unit: SY5A2R

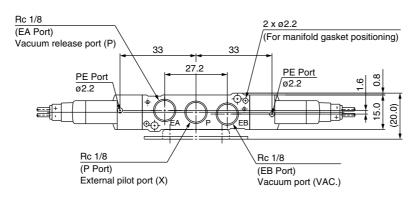

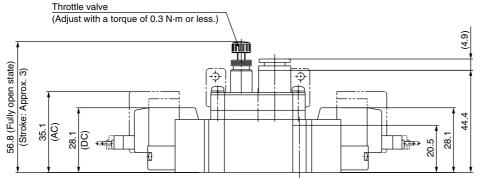




Details of Manual Portion

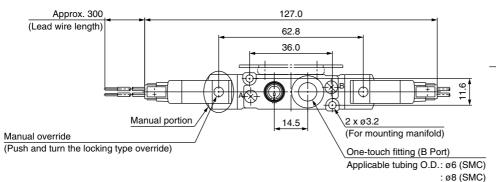





22.6

22.6


22.6

2 x M3 x 0.5 thread depth 3.5 (For mounting bracket)

(37.0)

(45.0)

(45.0)



[Remarks for valves]


Note 1) Refer to pages 49, 225 and 226 for the details of electrical entry and electrical circuit with a light/surge voltage suppressor.


Note 2) Diagrams above are compatible with SY5A2R- \square L \square \square -(F2).


Note 3) When mounted with brackets, the product is mounted in a place specified with one dot chain lines.

Note 4) Applicable pilot valves are SY114/SY115-


Dimensions/Manifold: SS5Y5-20P-Stations -□□-□

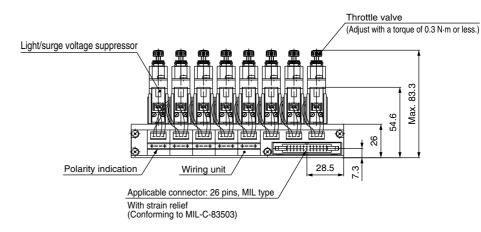

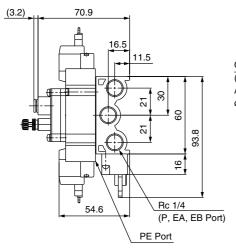

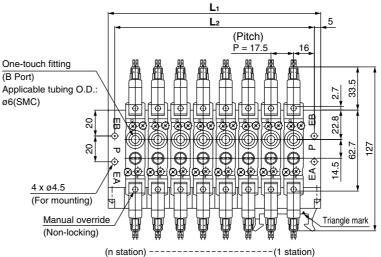

Pneumatic Circuit

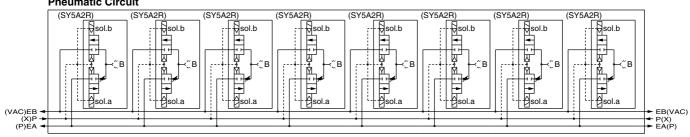


SMC

L: Dir	nens	ions:	mm						n:	Station
L	3	4	5	6	7	8	9	10	11	12
L ₁	77	94.5	112	129.5	147	164.5	182	199.5	217	234.5
L ₂	67	84.5	102	119.5	137	154.5	172	189.5	207	224.5
	03	04	05	06	07	08	09	10	11	12

^{*} Applicable blanking plate assembly part no.: SS5Y5-20-□□: SY5000-26-20A (with screws and gaskets) SS5Y5-20P-□□: SY5000-26-21A (with screws, gaskets and dust cap)

^{*} The product cannot be mounted with standard products the SY5000/500 series on a manifold.

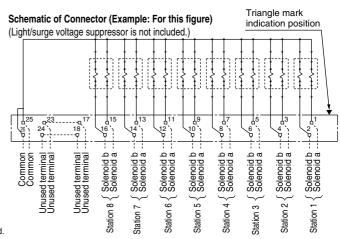

How to Use Manifold

△ Caution


<20/20P Type>

A piping port is different from that for the standard product. When not connected properly, the product will not operate properly.

[P port: External pilot port, EA port: Vacuum release pressure port, EB port: Vacuum suction port]

<20P Type>

- If a large amount of drainage is included in the supply air, it may cause electrical trouble since a wiring unit is located in the place where exhaust from the PE port directly goes through. Be sure to control the supply air.
- 2. For more than 10 stations, both poles of the common should be wired.
- When replacing a solenoid valve, etc., be sure to mount it by placing the solenoid a side on the connector (MIL type) side.
- 4. Terminal no. is not indicated on the connector.
- 5. The terminal no. indicated in the connection schematic of connector, as shown in the reference, means a correlation of 1, 2, 3...26 from the triangle mark side on the flat ribbon cable of connector. (Refer to the reference drawing.)






Series SY300/500 **Made to Order**



Body Ported External Pilot/Fluororubber for Main Valve

Body Ported External Pilot

Applicable solenoid valves: SY3□3, SY5□3



Note) Din terminal is not available for the SY300 series.


Operating pressure range MPa

Operating pressure range	-100 kPa to 0.7
Pilot pressure range	0.25 to 0.7

External pilot port

Series	Port size
SY300	M3 x 0.5
SY500	M5 x 0.8

Dimensions

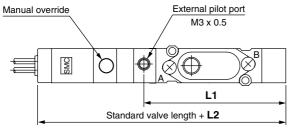

Dimentions/External Pilot Port Position

Series	L1 dimensions	L2 dimensions
SY300	41.5	6.5
SY500	60.4	9

Symbol


Body ported Normally closed (N.C.) Single solenoid








Normally closed (N.C.) Double solenoid



Normally open (N.O.) Double solenoid




Main Valve Fluororubber Specifications

Fluororubber is used for rubber parts of the main valve to allow use in applications such as the following.

• When using a lubricant other than the recommended turbine oil, and there is a possibility of malfunction due to swelling of the spool


Applicable solenoid valves: SY3□3, SY5□3



Specifications and performance are the same as standard products.

Series SY5000/7000 Made to Order Body Ported/Base Mounted 4-Position Dual 3-Port Valve

Features two 3-port valves built into one body

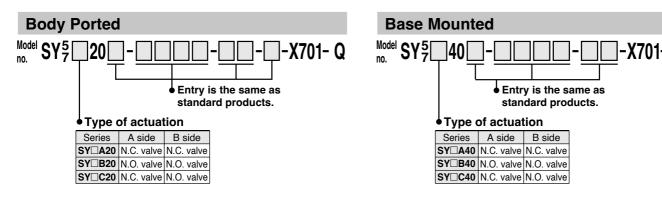

Note) For the thread type, only Rc and G are available.

Note) For the thread type, only Rc and G are available. Note) Only the internal pilot type is available.

Specifications

The dimensions are the same as those of the 2-position double.

Response time

	Response time [ms] (at the pressure of 0.5 MPa)			
Series	Without surge voltage suppressor	S, Z type	R, U type	
SY5A/B/C□0-X701	26 or less	35 or less	26 or less	
SY7A/B/C□0-X701	41 or less	51 or less	44 or less	

Flow rate characteristics


1) Body ported


		Port size		Flow rate characteristics				
Series	Type of actuation		4.0	1 → 4/2 (→ 4/2 (P → A/B) 4/2 -		/2 → 5/3 (A/B → EA/EB)	
(Body ported)		1, 5, 3 (P, EA, EB)	4, 2 (A, B)	C [dm³/ (s·bar)]	b	C [dm ³ / (s·bar)]	b	
SY5A/B/C20-X701	N.C./N.C.	1/8	C6	1.4	0.35	1.4	0.34	
	N.O./N.O.		Co	1.3	0.36	1.2	0.32	
SY7A/B/C20-X701	N.C./N.C.	1 (P) port: 1/4	C10	3.5	0.25	2.3	0.40	
317A/B/C20-X701	N.O./N.O.	5, 3 (EA, EB) port: 1/8	010	3.0	0.31	2.6	0.42	

2) Base mounted

		Port size		Flow rate characteristics				
Series	_ , , ,	1, 5, 3 (P, EA, EB) 4, 2 (A, E	4.0	1 → 4/2 ($1 \rightarrow 4/2 \text{ (P} \rightarrow \text{A/B)} \qquad 4/2 \rightarrow 5/2$		$(A/B \rightarrow EA/EB)$	
(Base mounted)	Type of actuation		4, 2 (A, B)	C [dm³/ (s·bar)]	b	C [dm³/ (s·bar)]	b	
CVEA/D/C40 V701	N.C./N.C.	1/4		1.4	0.36	1.6	0.40	
SY5A/B/C40-X701	N.O./N.O.	1/4		1.6	0.37	1.6	0.41	
SY7A/B/C40-X701	N.C./N.C.	3/8		3.8	0.30	3.6	0.27	
517A/b/C40-X/01	N.O./N.O.	3/6		3.9	0.26	3.9	0.32	


Symbol

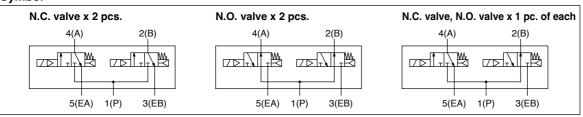



Series SY3000/5000/7000/9000 Pilot Valve Assembly Port Block Assembly

How to Order Pilot Valve Assembly

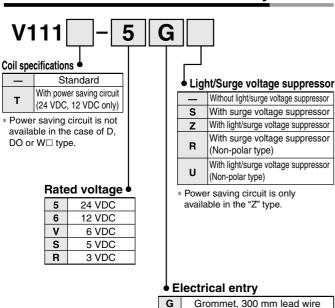

Н

LN

LO

М

MN

MO

WO M8

L plug

M plug

connector

connector

W□ connector | With connector cable Note 1)
 * For connector cable of M8 connector, refer to page 230.

Note 1) Enter the cable length symbols in □.

Grommet, 600 mm lead wire
With lead wire

Without lead wire

Without connector

Without lead wire

Without connector

Without connector cable

With lead wire

■ DIN terminal type V115 − 5 D

Rated voltage

5	24 VDC
6	12 VDC
1	100 VAC 50/60 Hz
2	200 VAC 50/60 Hz
3	110 VAC 50/60 Hz
3	[115 VAC 50/60 Hz]
4	220 VAC 50/60 Hz
4	[230 VAC 50/60 Hz]

* DC specifications of type D and DO is only available with 12 and 24 VDC.

Light/Surge voltage suppressor

_	Without light/surge voltage suppressor		
s	With surge voltage suppressor (Non-polar type)		
	With light/surge voltage suppressor (Non-polar type)		


- * DOZ and YOZ are not available.
- * For AC voltage valves there is no "S" option. It is already built-in to the rectifier circuit.

Electrical entry

D	DIN	With connector
DO	terminal (Type D)	Without connector
Υ	DIN	With connector
YO	terminal (Type Y)	Without connector

Note) Do not replace V111 (G, H, L, M) to V115 (DIN terminal) and vice versa when replacing pilot valve assembly only.

How to Order Port Block Assembly



Series 3 SY3000 5 SY5000 7 SY7000 9 SY9000

♦ A, B port size Thread piping				
Symbol	Port size	Applicable series		
M5	M5 x 0.8	SY3000		
01	1/8	SY5000		
02	1/4	SY7000		
02	1/4	SY9000		
03	3/8	0000		

Thread type		
_	Rc	
F	G	
N NPT		
T	NPTF	
* Except for M5		

SY3000

SY5000

SY7000

SY9000

One-touch fitting (Inch size) One-touch fitting (Metric size) Port size Port size C4 One-touch fitting for ø4 N3 One-touch fitting for ø 5/32 SY3000 C6 One-touch fitting for ø6 N7 One-touch fitting for ø 1/4' N3 One-touch fitting for ø 5/32 C4 One-touch fitting for ø4 C6 One-touch fitting for ø6 N7 One-touch fitting for ø 1/4" SY5000 C8 One-touch fitting for ø8 N9 One-touch fitting for ø 5/16 C8 One-touch fitting for ø8 N9 One-touch fitting for ø 5/16 SY7000 C10 One-touch fitting for Ø10 N11 One-touch fitting for ø 3/8' C8 One-touch fitting for ø8 N9 One-touch fitting for ø 5/16 C10 One-touch fitting for ø10 SY9000 N11 One-touch fitting for ø 3/8' C12 One-touch fitting for ø12

How to Change Port Block Assembly

Connecting port size of A and B can be changed by replacing port block assembly mounted on body. When changing block assembly, correct screw torque must be achieved to avoid trouble; e.g. air leakage.

With the one-touch fitting port block assembly, it is only necessary to change the fitting and not the whole block. Refer to following part numbers.


One-touch fitting (Metric size)


(
Port size	Fitting assembly part no.	Applicable series
One-touch fitting for ø4	VVQ1000-50A-C4	SY3000
One-touch fitting for ø6	VVQ1000-50A-C6	313000
One-touch fitting for ø4	VVQ1000-51A-C4	
One-touch fitting for ø6	VVQ1000-51A-C6	SY5000
One-touch fitting for ø8	VVQ1000-51A-C8	
One-touch fitting for ø8	VVQ2000-51A-C8	SY7000
One-touch fitting for ø10	VVQ2000-51A-C10	517000
One-touch fitting for ø8	VVQ4000-50B-C8	
One-touch fitting for ø10	VVQ4000-50B-C10	SY9000
One-touch fitting for ø12	VVQ4000-50B-C12	

One-touch fitting (Inch size)

Port size	Fitting assembly part no.	Applicable series
One-touch fitting for ø5/32"	VVQ1000-50A-N3	SY3000
One-touch fitting for ø1/4"	VVQ1000-50A-N7	313000
One-touch fitting for ø5/32"	VVQ1000-51A-N3	
One-touch fitting for ø1/4"	VVQ1000-51A-N7	SY5000
One-touch fitting for ø5/16"	VVQ1000-51A-N9	
One-touch fitting for ø1/4"	VVQ2000-51A-N9	SY7000
One-touch fitting for ø3/8"	VVQ2000-51A-N11	517000
One-touch fitting for ø5/16"	VVQ4000-50B-N9	SY9000
One-touch fitting for ø3/8"	VVQ4000-50B-N11	319000


Note) Purchasing order is available in units of 10 pieces.

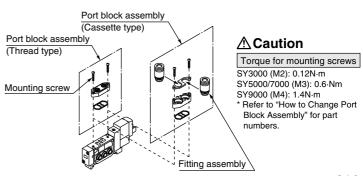



5 Port Solenoid Valve (CA CA LA US **Body Ported/Single Unit** Series SY3000/5000/7000/9000

How to Order

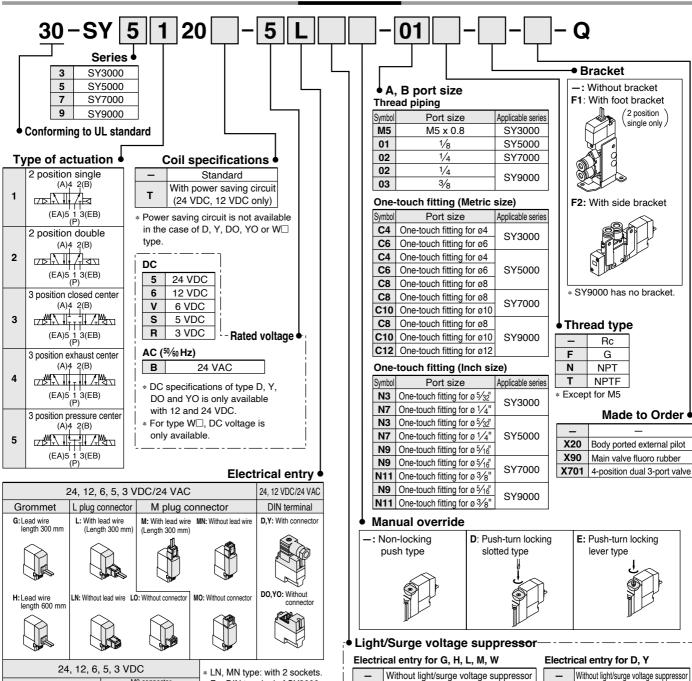

Electri	Electrical entry for G, H, L, M, W		
_	 Without light/surge voltage suppressor 		
S	With surge voltage suppressor		
Z	With light/surge voltage suppressor		
R	With surge voltage suppressor (Non-polar type)		
U	With light/surge voltage suppressor (Non-polar type)		

- * For AC voltage valves there is no "S" option. It is already built-in to the rectifier circuit.
- * For "R" and "U", DC voltage is only available

separately, if necessary.

* Power saving circuit is only available in the "Z" type

Note) When placing an order for body ported solenoid valve as a single unit, mounting screw for manifold and gasket are not attached. Order them

the rectifier circuit.

With surge voltage suppressor

With light/surge voltage suppressor

* DOZ and YOZ are not available.

* For AC voltage valves there is no

"S" option. It is already built-in to

Refer to the standard product for specifications and dimensions.

WA2: With connector cable (Length 0.5 m W2: With connector cable (Length 0.5 m W3: With connector cable (Length 1 m) WA3: With connector cable (Length 1 m) W4: With connector cable (Length 2 m) WA4: With connector cable (Length 2 m) W5: With connector cable (Length 3 m) WA5: With connector cable (Length 3 m) WA6: With connector cable (Length 4 m)



M8 connector

WO: Without connector cable

W1: With connector cable (Length 0.3 m)




WAO: Without connector cable

WA1: With connector cable (Length 0.3 m)

- * For DIN terminal of SY3000 series, refer to page 228. "Y" type is a DIN terminal
- conforming to EN-175301-803C (former DIN43650C). For details, refer to page 227.
- For connector cable of M8 connector, refer to page
- For the M8 connector with a connector cable, only American certification (**W**us) is available.
- Refer to page 227 for the lead wire length of L and M plug connectors.

5 Port Solenoid Valve (CA CA UK US **Base Mounted/Single Unit** Series SY3000/5000/7000/9000

How to Order

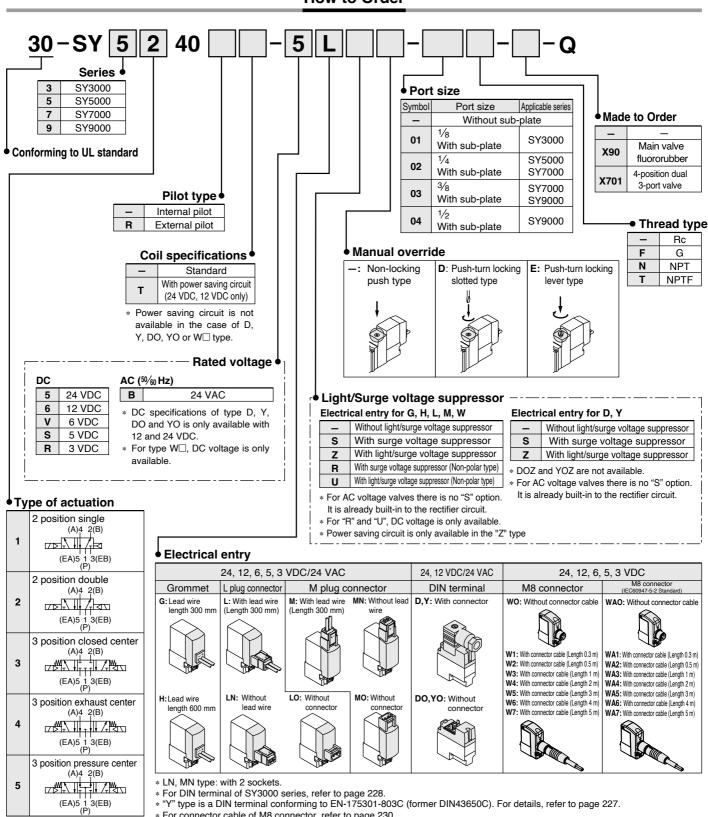

* LN, MN type: with 2 sockets.

5

- * For DIN terminal of SY3000 series, refer to page 228.

 * "Y" type is a DIN terminal conforming to EN-175301-803C (former DIN43650C). For details, refer to page 227.
- * For connector cable of M8 connector, refer to page 230
- * For the M8 connector with a connector cable, only American certification (🕦 us) is available.
- * Refer to page 227 for the lead wire length of L and M plug connectors

Note) When ordering single unit of the base mounted type solenoid valve, the mounting screws and gaskets for the manifold are included


Refer to the standard product for specifications and dimensions.



3 Port Solenoid Valve Body Ported/Single Unit

Series SY300/500

How to Order

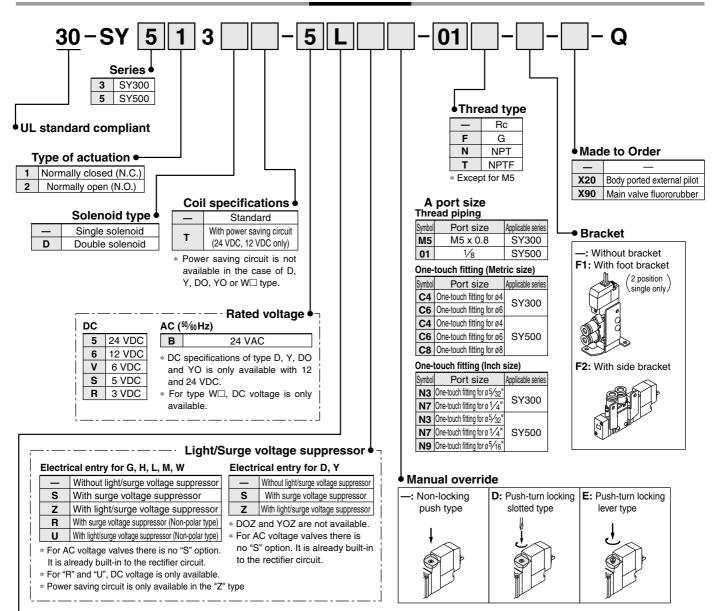

24, 12, 6, 5, 3 VDC/24 VAC 24, 12 VDC/24 VAC			24, 12 VDC/24 VAC	24, 12, 6, 5, 3 VDC				
Grommet	L plug connector	M plug connector	DIN terminal	M8 connector	M8 connector (IEC60947-5-2 Standard)			
G: Lead wire length 300 mm H: Lead wire length 600 mm	L: With lead wire (Length 300 mm) LN: Without lead wire LO: Without connector	MN: Without lead wire	D: With connector DO: Without connector Y: With connector YO: Without connector	W3: With connector cable (Length 1000 mm) W4: With connector cable (Length 2000 mm) W5: With connector cable (Length 3000 mm) W6: With connector cable (Length 4000 mm)	WAO: Without connector cable WA1: With connector cable (Length 300 mm) WA2: With connector cable (Length 500 mm) WA3: With connector cable (Length 1000 mm) WA4: With connector cable (Length 2000 mm) WA5: With connector cable (Length 3000 mm) WA6: With connector cable (Length 4000 mm) WA7: With connector cable (Length 5000 mm)			


- * LN, MN type: with 2 sockets.
- * For DIN terminal of SY300 series, refer to page 228.
- * "Y" type is a DIN terminal conforming to EN-175301-803C (former DIN43650C). For details, refer to page 227.
- * For connector cable of M8 connector, refer to page 230.
- \ast Refer to page 638 for the lead wire length of L and M plug connectors.

Note) When placing an order for body ported solenoid valve as a single unit, mounting screw for manifold and gasket are not attached. Order them separately, if necessary.



Series SY300/500

How to Order

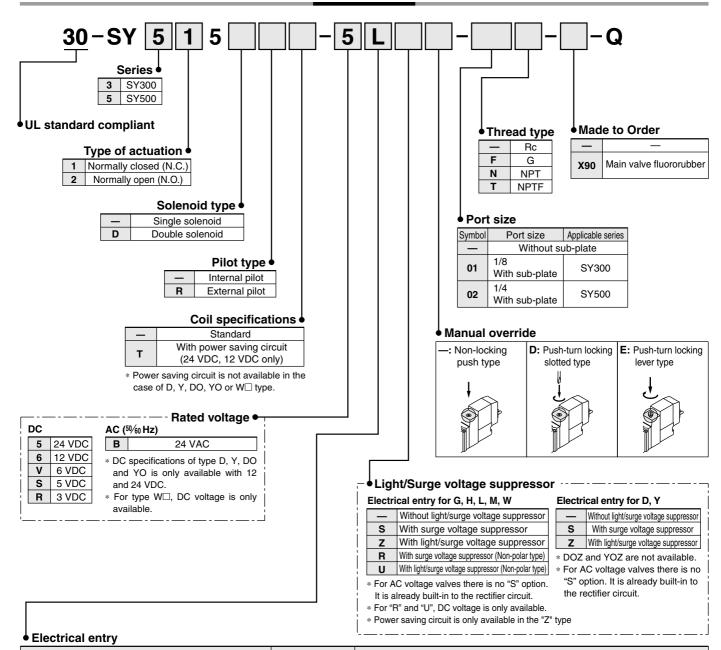

24, 12, 6, 5, 3 VDC/24 VAC 24, 12 VDC/24 VAC 24, 12, 6, 5, 3 VDC M8 connector L plug M plug Grommet DIN terminal M8 connector (IEC60947-5-2 Standard) connector connector G: Lead wire With lead wire With lead wire D: With connector WO: Without connector cable WAO: Without connector cable length 300 mm (Length 300 mm) (Length 300 mm) DO: Without connector W1: With connector cable (Length 300 mm) WA1: With connector cable (Length 300 mm) W2: With connector cable (Length 500 mm) MN: Without lead wire Y: With connector H: Lead wire LN: Without lead wire WA2: With connector cable (Length 500 mm) W3: With connector cable (Length 1000 mm) length 600 mm LO: Without connector MO: Without connector YO: Without connector WA3: With connector cable (Length 1000 mm) W4: With connector cable (Length 2000 mm) WA4: With connector cable (Length 2000 mm) W5: With connector cable (Length 3000 mm) WA5: With connector cable (Length 3000 mm) W6: With connector cable (Length 4000 mm) WA6: With connector cable (Length 4000 mm) W7: With connector cable (Length 5000 mm) WA7: With connector cable (Length 5000 mm)

- * LN, MN type: with 2 sockets.
- * For DIN terminal of SY300 series, refer to page 228.
- * "Y" type is a DIN terminal conforming to EN-175301-803C (former DIN43650C).
- * For connector cable of M8 connector, refer to page 230.
- * For the M8 connector with a connector cable, only American certification (\square\s
- * Refer to page 638 for the lead wire length of L and M plug connectors.


Note) When ordering single unit of the base mounted type solenoid valve, the mounting screws and gaskets for the manifold are included.




Base Mounted/How to Order Valve

(E CA CALUS

Plug-in: for SS5 Y_5^3 -45 \square

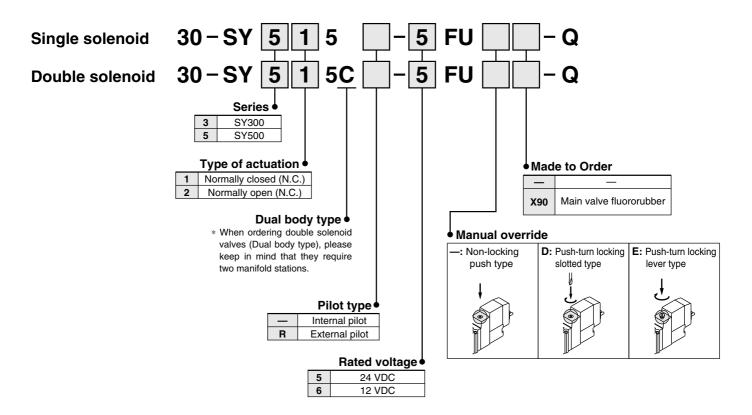

Plug-in: For SS5Y₅³-45F/45P□/45T/45T1

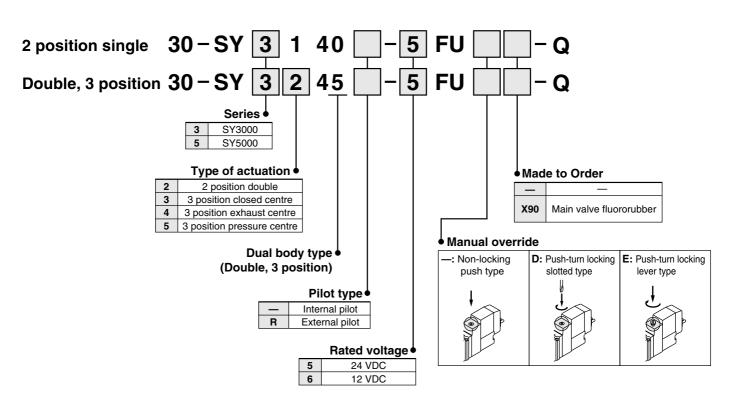



Be sure to read this before handling the products. For safety instructions and 3/4/5-port solenoid valve precautions, refer to the "Handling Precautions for SMC Products" and the "Operation Manual" on the SMC website: https://www.smc.eu

Manual Override Operation

⚠ Warning


■ Non-locking push type [Standard]

Press in the direction of the arrow



■ Push-turn locking slotted type [Type D]

While pressing, turn in the direction of the arrow. If it is not turned, it can be operated the same way as the non-locking type.








△ Caution

When operating the locking type D with a screw driver, turn it gently using a watchmakers screw driver.

[Torque: Less than 0.1 N·m]

■ Push-turn locking lever type [Type E]

While pressing, turn it the direction of the arrow. If it is not turned, it can be operated the same way as the non-locking type.



Locked position



∧Caution

When locking the manual override on the push-turn locking types (D, E), be sure to push it down before turning. Turning without first pushing it down can cause damage to the manual override and trouble such as air leakage, etc.

Solenoid Valve for 200, 220 VAC Specifications

⚠ Warning

Solenoid valves with DIN terminal and L/M type plug connector AC specifications have a built-in rectifier circuit in the pilot section to operate the DC coil.

With 200 V, 220 VAC specification pilot valves, this built-in rectifier generates heat when energised. The surface may become hot depending on the energised condition; therefore, do not touch the solenoid valves.

Exhaust Throttle

△Caution

With series SY, the pilot valve and main valve share a common exhaust inside the valve. Therefore, do not block the exhaust port when arranging the piping.

Series SY3000/5000/7000/9000 Used as a 3-Port Valve

In case of using a 5-port valve as a 3-port valve

Series SY3000/5000/7000/9000 can be used as normally closed (N.C.) or normally open (N.O.) 3-port port valves by closing one of the cylinder ports (A or B) with a plug. However, they should be used with the exhaust ports kept open.

Plug position		B port	A port		
Configuration		N.C.	N.O.		
solenoids	Single	Plug (A) (B) (2) (EA) (P) (EB)	Plug (A) (B) (EA) (B) (EA) (F) (EB)		
Number of solenoids	Double	Plug (A) (B) (EA) (P) (EB)	Plug (A) (B) (A) 2 (B)		




Be sure to read this before handling the products. For safety instructions and 3/4/5-port solenoid valve precautions, refer to the "Handling Precautions for SMC Products" and the "Operation Manual" on the SMC website: https://www.smc.eu

How to Use Plug Connector

1. Attaching and detaching connectors


- To attach a connector, hold the lever and connector unit between your fingers and insert straight onto the pins of the solenoid valve so that the lever's pawl is pushed into the groove and locks.
- To detach a connector, remove the pawl from the groove by pushing the lever downward with your thumb, and pull the connector straight out.

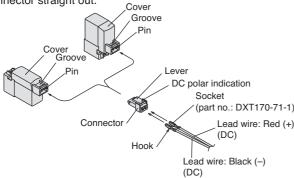

2. Crimping connection of lead wire and socket

Strip 3.2 to 3.7 mm at the end of lead wires, insert the end of the core wires evenly into the sockets, and then crimp it by a crimping tool. When this is done, take care that the coverings of the lead wires do not enter the core wire crimping area.

(Crimping tool: Model no. DXT170-75-1)



3. Attaching and detaching lead wires with sockets

Attaching


Insert the sockets into the square holes of the connector (+, - indication), and continue to push the sockets all the way in until they lock by hooking into the seats in the connector.

(When they are pushed in, their hooks open and they are locked automatically.) Then confirm that they are locked by pulling lightly on the lead wires.

Detaching

To detach a socket from a connector, pull out the lead wire while pressing the socket's hook with a stick having a thin tip (approx. 1 mm).

If the socket will be used again, first spread the hook outward.




Surge Voltage Suppressor

<For DC>


Grommet, L/M Plug Connector

■ Standard type (With polarity) With surge voltage suppressor (□S)

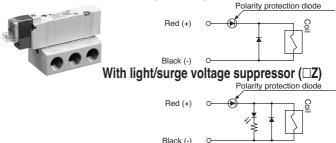




■ Non-polar type With surge voltage suppressor (□R)



With light/surge voltage suppressor (□U)



- Connect the standard type in accordance with the +, polarity indication. (The non-polar type can be used with the connections made either way.)
- Since voltage specifications other than standard 24 V and 12 VDC do not have diodes for polarity protection, be careful not to make errors in the polarity.
- Please use caution regarding the allowable voltage fluctuation because there is about a 1 volt drop for a valve with polarity protection. (For details, refer to the solenoid specifications for the individual valve.)
- When wiring is done at the factory, positive (+) is red and negative (–) $\,$

■ With power saving circuit

Power consumption is decreased by 1/4 by reducing the wattage required to hold the valve in an energised state. (Effective energising time is over 62 ms at 24 VDC.)

Electric circuit (with power saving circuit)

O Red (+)

Diode


11: Starting current i2: Holding current

Operating Principle

With the above circuit, the current consumption when holding is reduced to save energy. Please refer to the electric wave data below.

- Please be careful not to reverse the polarity, since a diode to prevent the reversed current is not provided for the power saving circuit.
- Please use caution regarding the allowable voltage fluctuation because there is about a 0.5 volt drop due to the transistor. (For details, refer to the solenoid specifications for the individual valve.)

(In the case of SY $\frac{5}{9}$ **0T, the electric wave form of energy saving type)








Be sure to read this before handling the products. For safety instructions and 3/4/5-port solenoid valve precautions, refer to the "Handling Precautions for SMC Products" and the "Operation Manual" on the SMC website: https://www.smc.eu


Surge Voltage Suppressor

DIN Terminal

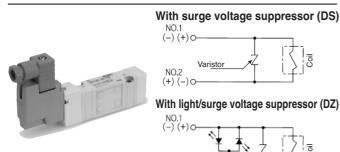



DIN terminal has no polarity.

M8 Connector

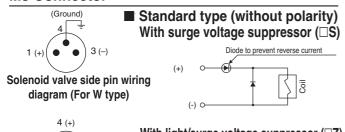






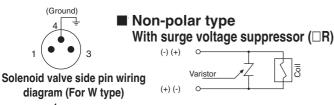

1 3


Solenoid valve side pin wiring diagram (For WA type)



- In the case of standard type, connect + to 1 and to 3 for W type, and connect + to 4 and - to 3 for WA type, according the polarity.
- For DC voltages other than 12 V and 24 V, incorrect wiring will case damage to the surge suppressor circuit.
- Please use caution regarding the allowable voltage fluctuation because there is about a 1 volt drop for a valve with polarity protection. (For details, refer to the solenoid specifications for the individual valve.)

Plug-in

Circuit for non-polar (FU)




Plug-in valve has no polarity, so its possible to use for both manifold bases for positive ($SS5Y_5^3-45\square$) and negative its common ($SS5Y_5^3-45N\square$) types.

<For AC>

(There is no "S" option, because the generation of surge voltage is prevented by a rectifier.)

DIN Terminal

With light (DZ)



Note) Surge voltage suppressor of varistor has residual voltage corresponding to the protective element and rated voltage; therefore, protect the controller side from the surge voltage. The residual voltage of the diode is approximately 1 V





SY Series Specific Product Precautions 3-1

Be sure to read this before handling the products. For safety instructions and 3/4/5-port solenoid valve precautions, refer to the "Handling Precautions for SMC Products" and the "Operation Manual" on the SMC website: https://www.smc.eu

Continuous Duty

⚠ Caution

If a valve is energized continuously for a long period of time, the rise in temperature due to heat-up of the coil assembly may cause a decline in solenoid valve performance, reduce service life, or have adverse effects on peripheral equipment. In particular, if 3 or more adjacent stations on the manifold are energized simultaneously for extended periods of time, take special care as the temperature rise will be greater. In such cases, if it is possible to select a valve with a power-saving circuit, be sure to do so.

UL Approved Product

⚠ Caution

When conformity to UL is required, the product should be used with a UL1310 Class 2 power supply.

The product is a UL approved product only if it has a cmark on the body.







Be sure to read this before handling the products. For safety instructions and 3/4/5-port solenoid valve precautions, refer to the "Handling Precautions for SMC Products" and the "Operation Manual" on the SMC website: https://www.smc.eu

Plug Connector Lead Wire Length

⚠ Caution

Standard length is 300mm, but the following lengths are also available.

How to Order Connector Assembly

For DC: SY100-30-4AWithout lead wire: SY100-30-A
(with connector and 2 of sockets only)

· How to Order

Specify the part numbers of the solenoid valve without connector and the connector assembly with protective cover separately.

<Example> Lead wire length 2000 mm

For DC SY3120-5LO-M5 SY100-30-4A-20

Lead wire length					
-	300 mm				
6	600 mm				
10	1000 mm				
15	1500 mm				
20	2000 mm				
25	2500 mm				
30	3000 mm				
50	5000 mm				

How to Use DIN Terminal

Connection

- Loosen the holding screw and pull the connector out of the solenoid valve terminal block.
- After removing the holding screw, insert a flat head screwdriver, etc. into the notch on the bottom of the terminal block and pry it open, separating the terminal block and the housing.
- Loosen the terminal screws (slotted screws) on the terminal block, insert the cores of the lead wires into the terminals according to the connection method, and fasten them securely with the terminal screws.
- 4. Secure the cord by fastening the ground nut.

When making connections, take note that using other than the supported size (\emptyset 3.5 to \emptyset 7) heavy duty cord will not satisfy IP65 (enclosure) standards. Also, be sure to tighten the ground nut and holding screw within their specified torque ranges.

Changing the entry direction

After separating the terminal block and housing, the cord entry can be changed by attaching the housing in the desired direction (4 directions at 90 intervals).

* When equipped with a light, be careful not to damage the light with the cord's lead wires.


Precautions

Plug in and pull out the connector vertically without tilting to one side.

Compatible cable

Cord O.D.: ø3.5 to ø7

(Reference) 0.5mm2, 2-core or 3-core, equivalent to JIS C 3306

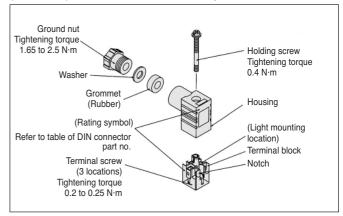




Be sure to read this before handling the products. For safety instructions and 3/4/5-port solenoid valve precautions, refer to the "Handling Precautions for SMC Products" and the "Operation Manual" on the SMC website: https://www.smc.eu

Series SY300, SY3000 How to Use DIN Terminal Connector

^Caution

SMC can provide a DIN style terminal connector (body ported type, sub-plate type) for the series SY300 and SY3000. This cannot be assembled to a standard manifold since the DIN connector width (15.8mm) exceeds that of the valve body (10mm). Contact SMC if you wish to use with a manifold. Please also note: that brackets F1, F2 cannot be mounted.

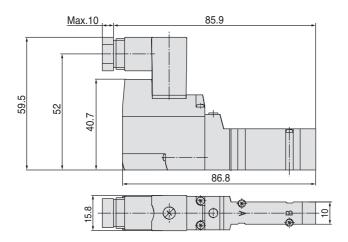


DIN Connector Part No.

SY100-61-1

∴Caution Without light

with light		
Rated voltage	Voltage symbol	No.
24 VDC	24 V	SY100-61-3-05
12 VDC	12 V	SY100-61-3-06
100 VAC	100 V	SY100-61-2-01
200 VAC	200 V	SY100-61-2-02
110 VAC	110 V	SY100-61-2-03
220 VAC	220 V	SY100-61-2-04

Circuit Diagram with Light

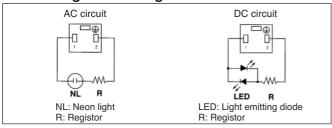

Note) Refer to page 212 for DIN connector (Y) conforming to EN-175301-803C (former DIN 43650C).

Connector Assembly with Cover


∧Caution

Connector assembly with dust proof protective cover.

- Effective to prevention of short circuit failure due to the entry of foreign matter into the connector.
- Chloroprene rubber for electrical use, which provides outstanding weather resistance and electrical insulation, is used for the cover material. However, do not allow contact with cutting oil, etc.
- Simple and unencumbered appearance by adopting round-shaped cord.

How to Order SY100-68-A-Lead wire length (L) 300 mm 6 600 mm 10 1000 mm 15 1500 mm 20 2000 mm 25 2500 mm 30 3000 mm 50 5000 mm

Connector Assembly with Cover: Dimensions

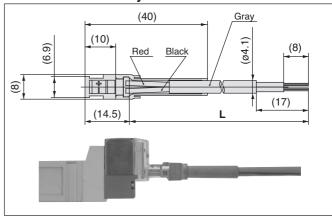

How to Order

Enter the part number for a plug connector solenoid valve without connector together with the part number for a connector assembly with cover.

<Example 1> Lead wire length of 2000 mm

SY3120-5LOZ-M5-Q SY100-68-A-20

<Example 2> Lead wire length of 300 mm (standard)

SY3120-5LPZ-M5-Q

Symbol for connector assembly with cover

* In this case, the part number for the connector assembly with cover is not required.





Be sure to read this before handling the products. For safety instructions and 3/4/5-port solenoid valve precautions, refer to the "Handling Precautions for SMC Products" and the "Operation Manual" on the SMC website: https://www.smc.eu

Plug-in


■ When using a double solenoid valve (Dual body type: SY³ 245-□FU) on the plug-in style manifold (SS5Y³ 45(N)□), two manifold stations are required per valve.

Output to A/B ports will be made through the manifold block on the side indicated by an arrow on the top of the solenoid valve. Therefore, arrange the piping on the side indicated by the arrow.


Although the "T" side will not be used, plugs will not be necessary since it is sealed with the valve.

(However, insert a plug into the A/B ports if dust intrusion is possible. Refer to page 138.)

Manifold valve SS5Y ³-45 (N)□



Plug-in type solenoid valves consist of a non-polar solenoid valve and a plug-in socket. When ordering them separately, refer to the following part numbers.

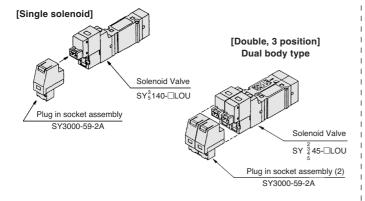

Note) Using a valve other than a non-polar type may cause trouble.

DIN Rail for Series SY7000/9000

_Caution

The DIN rail used with Series SY7000 and SY9000 is stronger than that used with Series SY3000 and SY5000. Use this exclusive DIN rail with Series SY7000 and SY9000. Furthermore, if using a DIN rail other than that supplied by SMC, refer to the manifold mounting section below, and mount using the same method as prescribed for side facing and rear facing, regardless of the mounting orientation.

Manifold Mounting

^Caution


1. For Type 23, 43, 45, 45□ and 60 DIN rail mounting, when attaching a manifold to a mounting surface, etc., with bolts, if the entire bottom surface of the DIN rail contacts the mounting surface in a horizontal mounting, it can be used by simply securing both ends of the DIN rail. However, for any other mounting method or for side facing and rear facing, etc., secure the DIN rail with bolts at uniform intervals using the following as a guide: 2 to 5 stations at 2 locations, 6 to 10 stations at 3 locations, 11 to 15 stations at 4 locations, and 16 to 20 stations at 5 locations. In addition, even in the case of a horizontal mounting, if the mounting surface is subject to vibration, etc., take the same measures indicated above. If secured at fewer than the specified number of locations, warping or twisting may occur in the DIN rail and manifold, causing trouble such as air leakage.

Also, when using mounting screws for the DIN rail on the bottom side (L3 dimension in the dimension table) of the manifold valve body, the height of the screw head has to be as follows.

Type 23, 43 (SY9000): 8 mm or less Type 45 (SY3000, 5000): 5.8 mm or less

For type 60:

SY3000: 4.7 mm or less SY5000: 5.8 mm or less SY7000: 8 mm or less

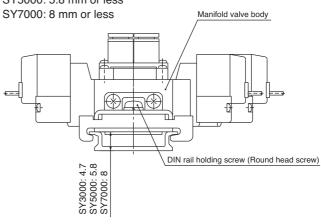

[This is the case for type 60.]

2. There will be slight variations in the width of manifold blocks due to tolerance (±0.15 mm) for the stacking manifold type of the SS5Y9-23 series and SS5Y9-43 series.

As the manifold is made up of a combination of manifold blocks, there will be an error due to accumulated tolerance between the actual pitch dimensions of the mounting holes used to secure the manifold and the values stated in the catalog. Keep this in mind when increasing the number of stations.





Be sure to read this before handling the products. For safety instructions and 3/4/5-port solenoid valve precautions, refer to the "Handling Precautions for SMC Products" and the "Operation Manual" on the SMC website: https://www.smc.eu

One-touch Fittings

⚠Caution

When fittings are used, they may interfere with one another depending on their types and sizes. Therefore, the dimensions of the fittings to be used should first be confirmed in their respective catalogues.

Tubing attachment/detachment for One-touch fittings

1) Attaching of tubing

- 1. Take a tubing having no flaws on its periphery and cut it off at a right angle. When cutting the tubing, use tubing cutters TK-1, 2 or 3. Do not use pinchers, nippers or scissors, etc. If cutting is done with tools other than tubing cutters, the tubing may be cut diagonally or become flattened, etc., making a secure installation impossible, and causing problems such as the tubing pulling out after installation or air leakage. Allow some extra length in the tubing.
- 2. Grasp the tubing and push it in slowly, inserting it securely all the way into the fitting.
- 3. After inserting the tubing, pull on it lightly to confirm that it will not come out. If it is not installed securely all the way into the fitting, this can cause problems such as air leakage or the tubing pulling out.

2) Detaching of tubing

- 1. Push in the release button sufficiently, pushing its collar equally around the circumference.
- 2. Pull out the tubing while holding down the release button so that it does not come out. If the release button is not pressed down sufficiently, there will be increased bite on the tubing and it will become more difficult to pull it out.
- 3. When the removed tubing is to be used again, cut off the portion which has been chewed before reusing it. If the chewed portion of the tubing is used as is, this can cause trouble such as air leakage or difficulty in removing the tubing.
- The pitch determined for each of the series SY piping ports (A, B, etc.) is based on the assumption that series KJ one-touch fittings will be used. For this reason, other pipe fittings may interfere with each other depending on their type and size. Dimensions should be confirmed in a pipe fitting catalogue before they are used.

Other Tubing Brands

⚠Caution

 When using other than SMC brand tubing, confirm that the following specifications are satisfied with respect to the outside diameter tolerance of the tubing.

1) Nylon tubing within 0.1 mm
2) Soft nylon tubing within 0.1 mm
3) Polyurethane tubing within +0.15 mm, within -0.2 mm.

Do not use tubing which do not meet these outside diameter tolerances. It may not be possible to connect them, or they may cause other trouble, such as air leakage or the tubing pulling out after connection.

M8 Connector

⚠ Caution

- 1.M8 connector types have an IP65 (enclosure) rating, offering protection from dust and water. However please note: these products are not intended for use in water. Select a SMC connector cable (V100-49-1-□) or a FA sensor type connector, with M8 threaded 3 pin specifications conforming to Nippon Electric Control Equipment Association Standard, NECA4202 (IEC60947-5-2). Make sure the connector O.D. is 10.5mm or less when used with the Series SY3000 manifold. If more than 10.5mm, it cannot be mounted due to the size.
- 2. Do not use a tool to mount the connector, as this may cause damage. Only tighten by hand. (0.4 to 0.6 N·m)
- The excessive stress on the cable connector will not be able to satisfy the IP65 rating. Please use caution and do not apply a stress of 30 N or greater.

⚠ Caution

Failure to meet IP65 performance may result if using alternative connectors than those shown above, or when insufficiently tightened.

Connector cable mounting



Note) Connector cable should be mounted in the correct direction. Make sure that the arrow symbol on the connector is facing the triangle symbol on the valve when using SMC connector cable (V100-49-1-□).

Be careful not to squeeze it in the wrong direction, as problems such as pin damage may occur.





Be sure to read this before handling the products. For safety instructions and 3/4/5-port solenoid valve precautions, refer to the "Handling Precautions for SMC Products" and the "Operation Manual" on the SMC website: https://www.smc.eu

M8 Connector


⚠ Caution

■ Connector cable


• Connector cable for M8 can be ordered as follows:

How to Order

To order solenoid valve and connector cable at the same time.
 (Connector cable will be included in the shipment of the solenoid valve.)

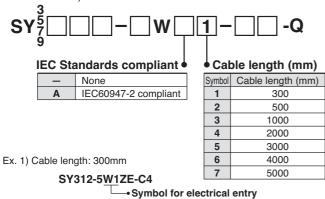


2. To order connector cable only

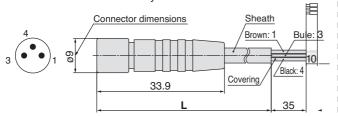

Cable length (L)	No.			
300 mm	V100-49-1-1			
500 mm	V100-49-1-2			
1000 mm	V100-49-1-3			
2000 mm	V100-49-1-4			
5000 mm	V100-49-1-7			

Sheath O.D.	ø3.4 mm
Cover diameter	ø1.16 mm
Conductor area	0.16 mm ²

[Dimensions when installed]



Solenoid Valve Mounting

∧ Caution


Mount it so that there is no slippage or deformation in gaskets, and tighten with the tightening torque as shown below.

Model	Thread size	Tightening torque					
SY3000	M2	0.16 N·m					
SY5000	M3	0.8 N·m					
SY7000	M4	1.4 N·m					
SY9000	M3	0.8 N·m					


Replacement of Pilot Valve

⚠Caution

Pilot valves in this series are improved to provide excellent energy saving results. However following this improvement, these new valves are no longer compatible with the conventional pilot valve used at the interface. Consult with SMC when you need to exchange these pilot valves, in the case of manual override (marked in orange) of the adapter plate.



Conventional type







Be sure to read this before handling the products. For safety instructions and 3/4/5-port solenoid valve precautions, refer to the "Handling Precautions for SMC Products" and the "Operation Manual" on the SMC website: https://www.smc.eu


Interface Regulator


⚠Caution

Specifications


produitations										
del	ARBY3000-□-P-2	ARBY300)0-□- ^{A1} -2	ARBY5000-□-P-2	ARBY500	0-□- ^{A1} -2	ARBY7000-□-P-2	ARBY700	0-□- ^{A1} -2	
re model	SY3□40(R)			SY5□40(R)			SY7□40(R)			
	Р	Α	В	Р	Α	В	Р	Α	В	
	0.1 to 0.7 MPa									
ressure	0.7 MPa									
Fluid					r					
erature	Max. 50C									
re gauge	M5									
essure gauge	46 g (05), 50 g (06)			66.8 g			110.8 g			
th plug	20 g		60.4 g		103.2 g					
→A,B	_	2.45	mm ²	_	7.61	mm ²	_	13.54	13.54 mm ²	
→EA,EB	4.05 mm ²	3.91	mm ²	11.1 mm ²	10.1	mm ²	15.71 mm ²	15.71	mm ²	
r	essure erature e gauge ssure gauge h plug	e model SY3 P essure erature e gauge ssure gauge 3A,B AB 13000* SY3 P 20 20	e model SY3□40(R) P A essure erature e gauge ssure gauge 58ure gauge 46 g (05), 50 g (06) h plug 20 g ⇒A,B — 2.45	e model SY3 □ 40(R) P A B essure erature e gauge ssure gauge → A,B — 2.45 mm²	e model SY3□40(R) SY5□ P A B P 0.1 to 0 essure 0.7 N Ai erature Max. e gauge Messure gauge 46 g (05), 50 g (06) 66. h plug 20 g 60. >A,B — 2.45 mm² —	e model SY3 □ 40(R) SY5 □ 40(R) P A B P A 0.1 to 0.7 MPa essure Air erature Max. 50C e gauge M5 ssure gauge 46 g (05), 50 g (06) 66.8 g h plug 20 g 60.4 g ⇒A,B — 2.45 mm² — 7.61	e model SY3 □ 40(R) SY5 □ 40(R) P A B P A B 0.1 to 0.7 MPa essure Ferature Max. 50C e gauge M5 ssure gauge 46 g (05), 50 g (06) 66.8 g h plug 20 g 60.4 g → A,B — 2.45 mm² — 7.61 mm²	e model SY3 □ 40(R) SY5 □ 40(R) SY7 □ ARB 13000 □ - P-2 ARB 13000	e model SY3 □ 40(R) SY5 □ 40(R) SY7 □ 40(R) P A B P A B P A O.1 to 0.7 MPa Air erature	

- Note 1) Pressurise the interface regulator from P port on the base.
- Note 2) With closed center and pressure center valves, the pressure can be regulated through P port only.
- Note 3) Effective area, excluding the regulated port, when a primary pressure of 0.5 MPa is supplied with regulators mounted on the solenoid valves (2 positions) and sub-plate. Refer to "Flow Characteristics" regarding the regulated port.
- Note 4) Valves for weight include gasket and mounting screws.
- Note 5) With A, B ports regulated (P port controlled A, B ports regulated), the effective area (Cv factor) for the regulated port and unregulated passage (P to B or P to A) decreases as shown in the graph below when the set pressure is 0.25 MPa or less.




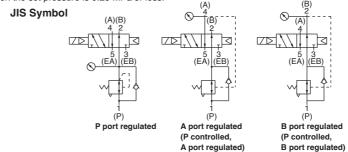


How to Order Interface Regulator

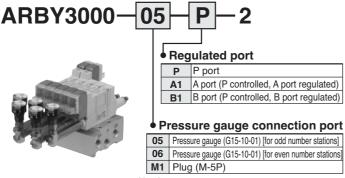

Note) For series ARBY3000 with pressure gauge, note that the part numbers for odd number and even number stations differ to prevent interference between the pressure gauges when installing on the manifold.

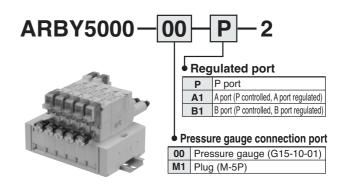

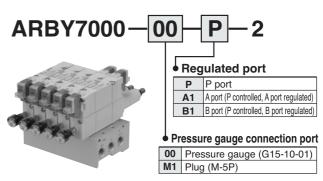




Be sure to read this before handling the products. For safety instructions and 3/4/5-port solenoid valve precautions, refer to the "Handling Precautions for SMC Products" and the "Operation Manual" on the SMC website: https://www.smc.eu

Flow Characteristics


(Conditions: Inlet pressure 0.7 MPa when 2 position solenoid valve is mounted.)

ARBY3000

P port regulated (P→A, B)




A1 port regulated $(P \rightarrow A)$, B1 port regulated $(P \rightarrow B)$




ARBY5000

P port regulated (P→A, B)




A1 port regulated ($P\rightarrow A$), B1 port regulated ($P\rightarrow B$)




ARBY7000

P port regulated (P→A, B)



A1 port regulated ($P\rightarrow A$), B1 port regulated ($P\rightarrow B$)



⚠ Safety Instructions

These safety instructions are intended to prevent hazardous situations and/or equipment damage. These instructions indicate the level of potential hazard with the labels of **"Caution," "Warning"** or **"Danger."** They are all important notes for safety and must be followed in addition to International Standards (ISO/IEC) ¹⁾, and other safety regulations.

Caution indicates a hazard with a low level of risk which, if not avoided, could result in minor or moderate

injury.

Warning indicates a hazard with a medium level of risk
 Warning: which, if not avoided, could result in death or serious

injury.

Danger indicates a hazard with a high level of risk which, if not avoided, will result in death or serious

injury.

ISO 4414: Pneumatic fluid power – General rules relating to systems.
 ISO 4413: Hydraulic fluid power – General rules relating to systems.
 IEC 60204-1: Safety of machinery – Electrical equipment of machines.
 (Part 1: General requirements)

ISO 10218-1: Manipulating industrial robots - Safety.

Marning

 The compatibility of the product is the responsibility of the person who designs the equipment or decides its specifications.

Since the product specified here is used under various operating conditions, its compatibility with specific equipment must be decided by the person who designs the equipment or decides its specifications based on necessary analysis and test results. The expected performance and safety assurance of the equipment will be the responsibility of the person who has determined its compatibility with the product. This person should also continuously review all specifications of the product referring to its latest catalogue information, with a view to giving due consideration to any possibility of equipment failure when configuring the equipment.

2. Only personnel with appropriate training should operate machinery and equipment.

The product specified here may become unsafe if handled incorrectly. The assembly, operation and maintenance of machines or equipment including our products must be performed by an operator who is appropriately trained and experienced.

- Do not service or attempt to remove product and machinery/ equipment until safety is confirmed.
 - The inspection and maintenance of machinery/equipment should only be performed after measures to prevent falling or runaway of the driven objects have been confirmed.
 - When the product is to be removed, confirm that the safety measures as mentioned above are implemented and the power from any appropriate source is cut, and read and understand the specific product precautions of all relevant products carefully.
 - 3. Before machinery/equipment is restarted, take measures to prevent unexpected operation and malfunction.
- Contact SMC beforehand and take special consideration of safety measures if the product is to be used in any of the following conditions.
 - Conditions and environments outside of the given specifications, or use outdoors or in a place exposed to direct sunlight.
 - 2. Installation on equipment in conjunction with atomic energy, railways, air navigation, space, shipping, vehicles, military, medical treatment, combustion and recreation, or equipment in contact with food and beverages, emergency stop circuits, clutch and brake circuits in press applications, safety equipment or other applications unsuitable for the standard specifications described in the product catalogue.
 - 3. An application which could have negative effects on people, property, or animals requiring special safety analysis.
 - 4. Use in an interlock circuit, which requires the provision of double interlock for possible failure by using a mechanical protective function, and periodical checks to confirm proper operation.

∧ Caution

1. The product is provided for use in manufacturing industries.

The product herein described is basically provided for peaceful use in manufacturing industries.

If considering using the product in other industries, consult SMC beforehand and exchange specifications or a contract if necessary. If anything is unclear, contact your nearest sales branch.

Limited warranty and Disclaimer/Compliance Requirements

The product used is subject to the following "Limited warranty and Disclaimer" and "Compliance Requirements".Read and accept them before using the product.

Limited warranty and Disclaimer

- The warranty period of the product is 1 year in service or 1.5 years after the product is delivered, whichever is first. ²)
 Also, the product may have specified durability, running distance or replacement parts. Please consult your nearest sales branch.
- For any failure or damage reported within the warranty period which is clearly our responsibility, a replacement product or necessary parts will be provided. This limited warranty applies only to our product independently, and not to any other damage incurred due to the failure of the product.
- Prior to using SMC products, please read and understand the warranty terms and disclaimers noted in the specified catalogue for the particular products.
- 2) Vacuum pads are excluded from this 1 year warranty. A vacuum pad is a consumable part, so it is warranted for a year after it is delivered. Also, even within the warranty period, the wear of a product due to the use of the vacuum pad or failure due to the deterioration of rubber material are not covered by the limited warranty.

Compliance Requirements


- The use of SMC products with production equipment for the manufacture of weapons of mass destruction (WMD) or any other weapon is strictly prohibited.
- 2. The exports of SMC products or technology from one country to another are governed by the relevant security laws and regulations of the countries involved in the transaction. Prior to the shipment of a SMC product to another country, assure that all local rules governing that export are known and followed.

↑ Caution

SMC products are not intended for use as instruments for legal metrology.

Measurement instruments that SMC manufactures or sells have not been qualified by type approval tests relevant to the metrology (measurement) laws of each country.

Therefore, SMC products cannot be used for business or certification ordained by the metrology (measurement) laws of each country.

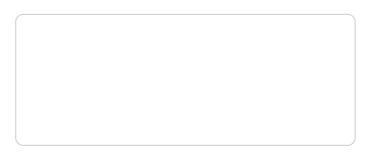

SMC Corporation (Europe)

Austria +43 (0)2262622800 www.smc.at Belgium +32 (0)33551464 www.smc.be Bulgaria +359 (0)2807670 www.smc.bg +385 (0)13707288 www.smc.hr Croatia Czech Republic +420 541424611 www.smc.cz Denmark +45 70252900 www.smcdk.com Estonia +372 651 0370 www.smcee.ee Finland +358 207513513 www.smc.fi France +33 (0)164761000 www.smc-france.fr Germany +49 (0)61034020 www.smc.de Greece +30 210 2717265 www.smchellas.gr Hungary +36 23513000 www.smc.hu Ireland +353 (0)14039000 www.smcautomation.ie Italy +39 03990691 www.smcitalia.it Latvia +371 67817700 www.smc.lv

office@smc.at
info@smc.be
office@smc.bg
office@smc.hr
office@smc.cz
smc@smcdk.com
info@smcee.ee
smcfi@smc.fi
supportclient@smc-france.fr
info@smc.de
sales@smchellas.gr
office@smc.hu
sales@smcautomation.ie
mailbox@smc.italia.it
info@smc.ly

Lithuania +370 5 2308118 www.smclt.lt **Netherlands** +31 (0)205318888 www.smc.nl Norway +47 67129020 www.smc-norge.no +48 222119600 Poland www.smc.pl Portugal +351 214724500 www.smc.eu Romania +40 213205111 www.smcromania.ro Russia +7 (812)3036600 www.smc.eu Slovakia +421 (0)413213212 www.smc.sk Slovenia +386 (0)73885412 www.smc.si Spain +34 945184100 www.smc.eu Sweden +46 (0)86031240 www.smc.nu **Switzerland** +41 (0)523963131 www.smc.ch Turkey +90 212 489 0 440 www.smcturkey.com.tr UK +44 (0)845 121 5122 www.smc.uk

info@smclt.lt
info@smc.nl
post@smc-norge.no
office@smc.pl
apoioclientept@smc.smces.es
smcromania@smcromania.ro
sales@smcru.com
office@smc.sk
office@smc.si
post@smc.smces.es
smc@smc.nu
info@smc.ch
satis@smcturkey.com.tr
sales@smc.uk

South Africa +27 10 900 1233 www.smcza.co.za zasales@smcza.co.za