




C(D)85-S/T, ISO Cylinder, Single Acting, Single Rod CD85N16-50S-B

Datasheet

- Single acting, single rod, spring return/spring extend
- Conforms to ISO standard 6432
- Bore sizes (mm): 8, 10, 12, 16, 20, 25
- Standard strokes up to 150mm
- · Auto switch capable



Single-acting cylinder, single piston rod, return stroke by spring

Standard specifications

Magnet	D (Built-in)		
Mounting	N (Basic Integrated Clevis)		
Bore Size	Ø16 mm		
Stroke	50		
Action	S (Spring Return)		
Switch Mounting	B (Band)		
Auto Switch	No Switch		
Lead Wire or Prewired Connector	0.5m (Or None in the Case of No Switch)		
Number	2 pcs. (Or None in the Case of No Switch)		
Rod End Options	None		
Made of Stainless Steel	None		
-	Compressed air		
Maximum temperature of pressure medium with magnet	80°C		
Minimum temperature of pressure medium with magnet	-20°C		
Maximum operating pressure	1 MPa		
Minimum operating pressure	0.13 Mpa		
Proof pressure	1.5 MPa		
Maximum ambient temperature with magnet	80°C		
Minimum ambient temperature with magnet	-20°C		


12/11/2021 Page 1

of the manufacturer.	
part	
0	
on th	
7	
ati	
gildo	
20	
nda	
a	
notic	
orior	
out p	
with	
nge	
char	
2	
bject	
gns	
are	
Suc	
atic	
ecific	
Spe	

Pneumatic input connection	M5
Pneumatic output connection	M5
Mode of operation of drive single	Single acting, spring return
Maximum piston speed	1500 mm/s
Type of cushioning	Rubber bumper
Piston rod end	External thread
Male thread of rod end	M6
Weight	0.131 Kg



Dimensions




Specifications are subject to change without prior notice and any obligation on the part of the manufacturer.



Constructions

Single acting: Single rod

Spring return/C□85□8 to 16-□S (Disassembly is not possible)

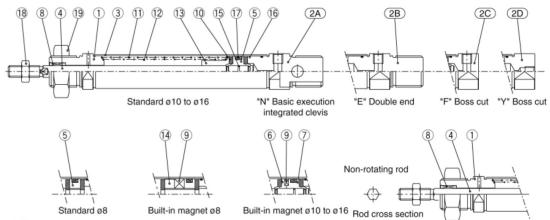

Component Parts

No.	Description	Material	Quantity	Remarks
1	Rod cover	Aluminum alloy	1	White anodized
(2A)	Head cover N	Aluminum alloy	1	White anodized
(2B)	Head cover E	Aluminum alloy	1	White anodized
(2C)	Head cover F	Aluminum alloy	1	White anodized
2D)	Head cover Y	Aluminum alloy	1	White anodized
3	Cylinder tube	Stainless steel	1	
4	Piston rod	Stainless steel	1	
(5)	Piston	Brass	1	
6	Piston A	Brass	1	(Switch style only)
7	Piston B	Brass	1	(Switch style only)
8	Bushing	Sintered bronze	1	

No.	Description	Material	Quantity	Remarks
9	Magnet		1	(Switch style only)
10	Bumper	Urethane	2	
11)	Return spring A	Piano wire	1	
12	Return spring B	Piano wire	1	
13	Spring guide	Brass	1	
14)	Spacer	Brass	1	
15	Piston gasket	NBR	1	
16	Tube gasket	NBR	1	
17	Piston seal	NBR	1	
18	Rod end nut	Carbon steel	1	Nickel plated
19	Mounting nut	Carbon steel	1	Nickel plated



Additional information

Catalogue

C85_C75-A_EU.pdf

Specifications are subject to change without prior notice and any obligation on the part of the manufacturer.