


DC COIL

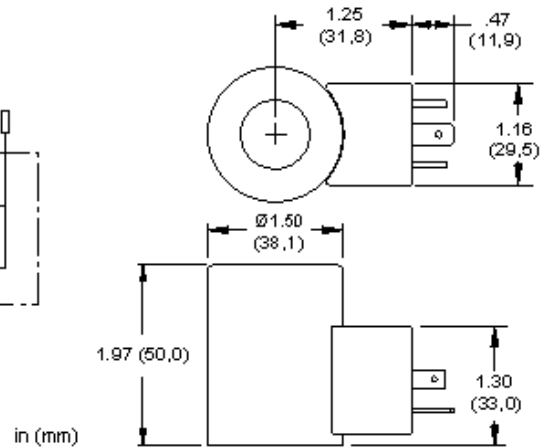

TECHNICAL DATA

Maximum Coil Temperature at 68°F (20°C) Ambient	218°F (105°C)
Arc Suppression (TVS)	Included
Power Consumption (cold) - at rated voltage	22 watts
Maximum Ambient Temperature	50 °C
Voltage/Frequency	24 VDC
Operating Voltage Range	+/- 10% nominal
Duty Cycle Rating	100 %
Connector	ISO4400 - EN/DIN175301-803, Form A (ISO/DIN 43650) 3-pin
Connector Environment Rating	IP65/IP67
Solenoid Tube Diameter	19 mm
Coil Nut Torque	0,5 Nm
Model Weight	0.23 kg.

PROPORTIONAL PERFORMANCE DATA

Maximum Current	590 mA
Nominal Coil Resistance at 122°F (50°C) Stabilized	37.2 ±5% ohms
Nominal Coil Resistance at 68°F (20°C) Cold	26.2 ±5% ohms

USED WITH

DAAL	DAALS	DBAL	DBALS	DFCA	DFCB	DFDA	DFDB	DFEA	DFEB
DFFA	DFFB	DLDA	DLDAZ	DLDAZ	DMDA	DMDAS	DMDAZ	DNCA	DNCAZ
DNDA	DNDAS	DNDC	DNDY	DNDYS	DTCA	DTCAZ	DTDA	DTDAS	DWDA
FMDA	FMDB	FPCC	FPCH	FPFK	FPHK	HDDA	PRDL	PRDM	PRDN
PRDP	PSDL	PSDP	RBAN	RBAP					

TECHNICAL FEATURES

- Coil windings utilize Class N, (392° F [200 °C] rated) magnet wire.
- A TVS surge suppression diode is built into DC coils. Nominal breakdown voltage: 68V. Model code 1.5 KE68CA Steady state power dissipation @ 75°C is 6.5 W and peak pulse dissipation is 1500 W for 1 ms, nonrepetitive.
- Power cable with mating connector is required and is not included with product.
- This coil is CE compliant. It meets the requirements of the Low Voltage Directive (2006/95/EC) and EN 60204-1:2006.
- The coil is magnetically symmetrical and can be mounted in either direction on the solenoid tube without affecting performance.
- For optimum proportional performance, an amplifier with current sensing and adjustable dither should be used. Dither should be adjustable between 100 - 250 Hz.
- IP rating is dependent on the coil connector and the mating connector used.
- RoHS compliant. Restricted materials less than 0.1% total by weight.
- The external steel shell is plated with clear zinc trivalent.